PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A0202225

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7004-5629 G1 SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5629-02	*	**BC**	**YSD-4514127911**	**MLER TRUCK BEV**

Applicable Terminals for this Tool:

7004-5629-02							

Anvil		Wire Crimper		Insulation Crimper	
7004-5629-Z0BA	(N)	7004-5629-Z0BW	(N)	NA	
CW (c)	*CW (i)*	*CW*		*CW*	


1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
	The two sides of the insulation grips are in the correct position.	**NA**	0~2.00mm 0~2.00mm	0.79 0		The Bell Mouth is within the spec.**(*)**	**O**
	Not found any Bell Mouth in the insulation area.	**NA**				The dimension of the cutting carrier is within the spec.**(*)**	**NA**
	The lance height and shape are not deformed.	**NA**	3º 3º	2 -		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**NA**	0~2.00mm	0.64		The exposed conductor is within the spec.(*)	**O**
	Not found any crack in the terminal.	**O**	3º	0.5		The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**	2º	0.01		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

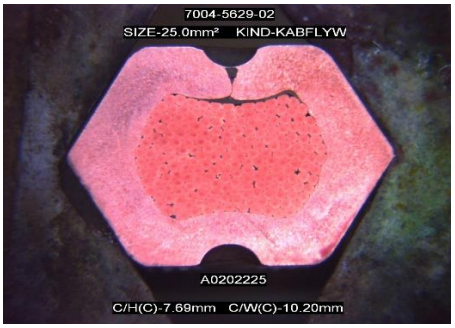2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	7,7	7,70	7,23
	+/-0.2		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range 25.0mm²~25.0mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2025/jan/09	Date: 2025/jan/09	Date: 2025/jan/09

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A0202225

LOWER WIRE KIND & SIZE

Wire kind: KABFLYW

Wire size: 25 mm²

Nominal Cr. Height:	7,7	NA	mm
+/-	0,2	NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	7,698	
2	7,686	
3	7,690	
4	7,705	
5	7,708	
6	7,700	
7	7,717	
8	7,692	
9	7,688	
10	7,708	
11	7,700	
12	7,685	
13	7,707	
14	7,690	
15	7,691	
16	7,706	
17	7,690	
18	7,703	
19	7,683	
20	7,698	
21	7,687	
22	7,691	
23	7,702	
24	7,686	
25	7,696	
26	7,689	
27	7,692	
28	7,686	
29	7,694	
30	7,695	
31	7,688	
32	7,703	
33	7,687	
34	7,699	
35	7,692	
36	7,701	
37	7,697	
38	7,679	
39	7,698	
40	7,682	
41	7,698	
42	7,680	
43	7,681	
44	7,693	
45	7,700	
46	7,712	
47	7,696	
48	7,705	
49	7,701	
50	7,712	
Average	7,70	
Cmk	7,23	

UPPER WIRE KIND & SIZE

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END

APP BATTERY CABLE CONSUMABLE PART LIST

A0202225	7004-5629G1

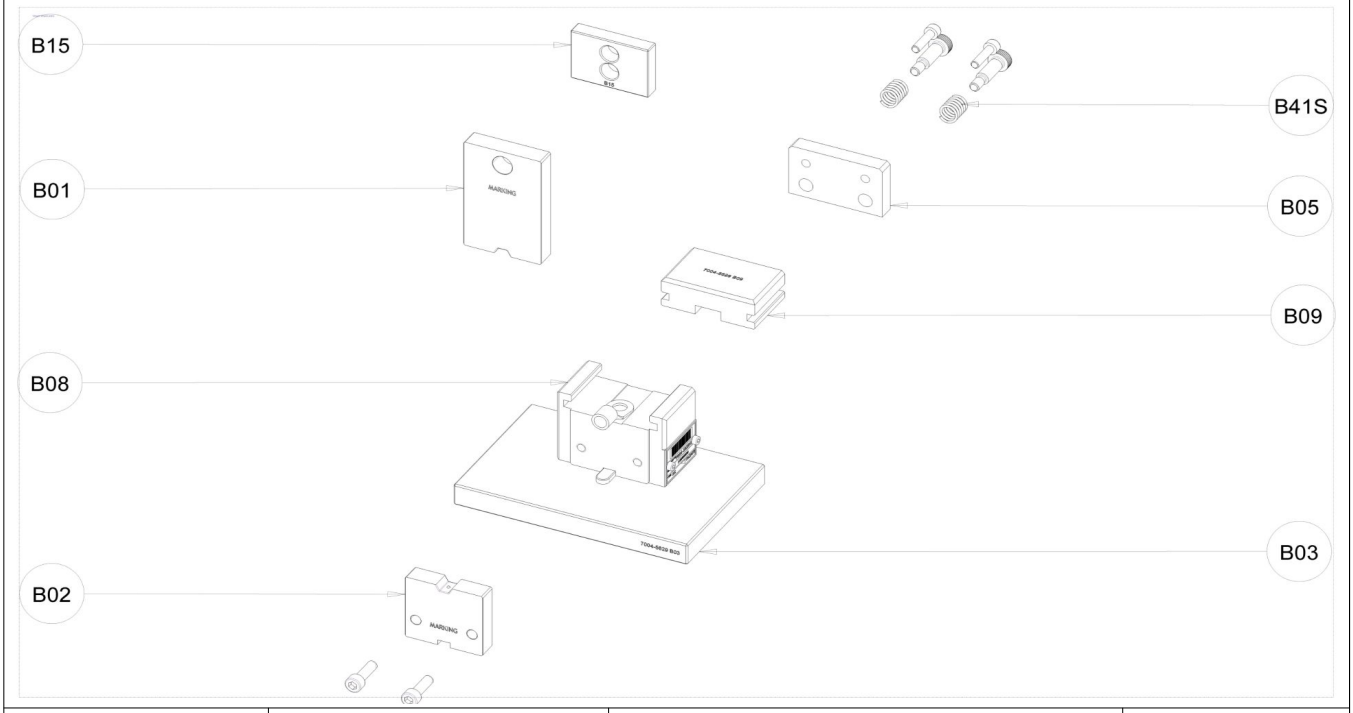

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
B01	***7004-5629-Z0BW***	WIRE CRIMPER	1
B02	***7004-5629-Z0BA***	ANVIL	1
B03	7004-5629 B03	DIE BASE	1
B05	B05	STOPPER PLATE	1
B08	7004-5629 B08	MAIN BLOCK	1
B09	7004-5629 B09	SLIDER	1
B15	B15	FRAME SPACER	1
B41S	41P00000811	SPRING	2