PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A0202226

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7004-5658 G1 SEQUENCE Nº 9








Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5658-02	*	**BC**	**YSD 4514127911**	**ILER TRUCK BEV**

Applicable Terminals for this Tool:

7004-5658-02			

Anvil		Wire Crimper		Insulation Crimper	
7004-5658-Z0BA	(N)	7004-5658-Z0BW	(N)	NA	
CW (c) 10,34	*CW (i)*	*CW* 10,34		*CW*	


1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
			O - ok **X** - ng **NA** - not aplicable				
	The two sides of the insulation grips are in the correct position.	**O**	0.00~2.00mm 0.00~2.00mm	0.46 0.24		The Bell Mouth is within the spec.**(*)**	**O**
	Not found any Bell Mouth in the insulation area.	**O**				The dimension of the cutting carrier is within the spec.**(*)**	**NA**
	The lance height and shape are not deformed.	**O**	3º 3º	0.8 --		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**O**	0.00~2.00mm	1.64		The exposed conductor is within the spec.(*)	**O**
	Not found any crack in the terminal.	**O**	3º	0.8		The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**	2º	0.2		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

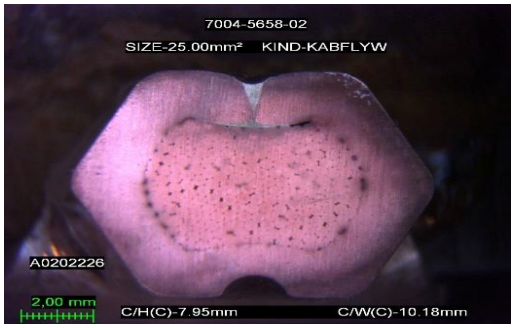2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	7,95	7,95	18,49
	+/-0.2		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range 25.00mm²

EVALUATION DECISION

SUITABLE **X**
NOT SUITABLE

FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 19147	PREPARED (Operator) nº 18388
Date: 2024/dez/17	Date: 2024/dez/17	Date: 2024/dez/17

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A0202226

LOWER WIRE KIND & SIZE

Wire kind:	KABFLYW		
Wire size:	25		mm^2
Nominal Cr. Height:	7,95	NA	mm
+/-	0,2	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	7,953	
2	7,957	
3	7,949	
4	7,955	
5	7,956	
6	7,957	
7	7,953	
8	7,958	
9	7,953	
10	7,957	
11	7,953	
12	7,946	
13	7,957	
14	7,953	
15	7,948	
16	7,955	
17	7,957	
18	7,953	
19	7,950	
20	7,953	
21	7,948	
22	7,957	
23	7,946	
24	7,955	
25	7,957	
26	7,957	
27	7,953	
28	7,956	
29	7,953	
30	7,957	
31	7,953	
32	7,949	
33	7,953	
34	7,957	
35	7,958	
36	7,958	
37	7,950	
38	7,957	
39	7,956	
40	7,957	
41	7,949	
42	7,953	
43	7,950	
44	7,946	
45	7,953	
46	7,956	
47	7,950	
48	7,949	
49	7,957	
50	7,953	
Average	7,95	
Cmk	18,49	

UPPER WIRE KIND & SIZE

Wire kind:	NA	+	NA	
Wire size:	NA	+	NA	mm^2
Nominal Cr. Height:	NA		NA	mm
+/-	NA		NA	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END

APP BATTERY CABLE CONSUMABLE PART LIST

A0202226	7004-5658G1

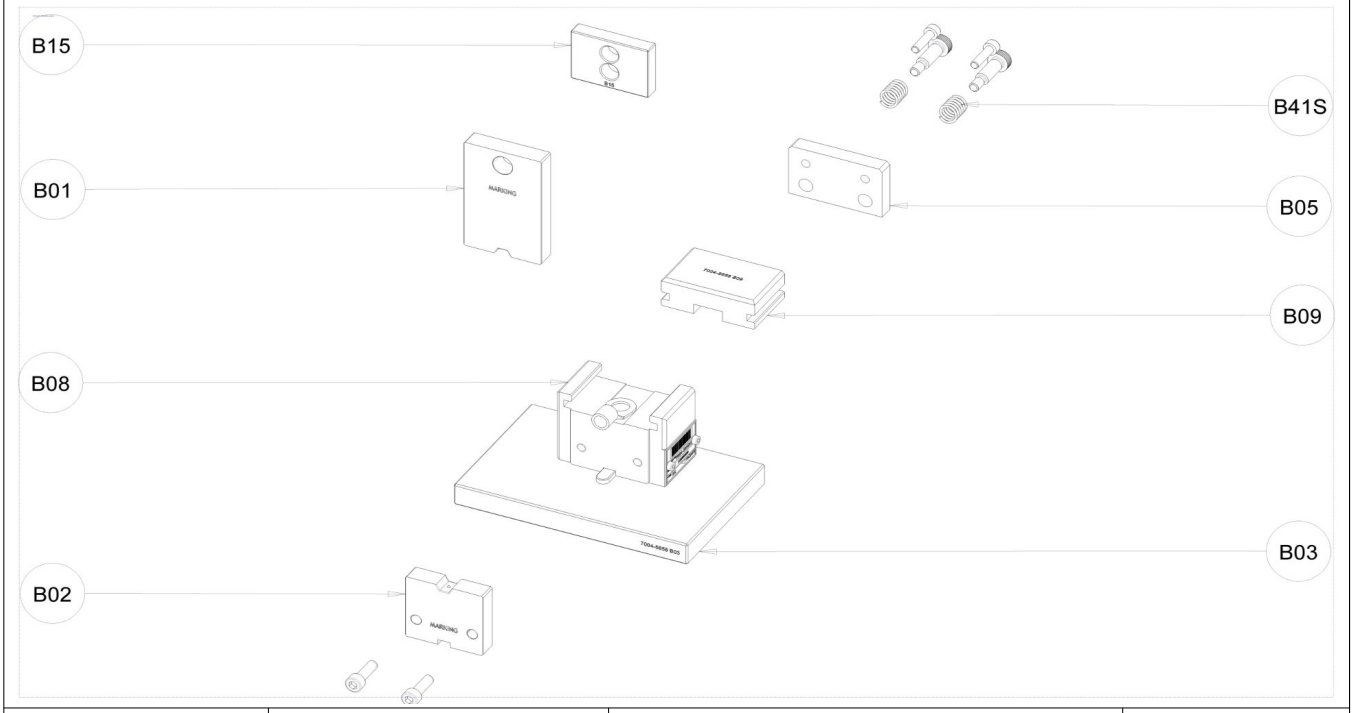

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
B01	***7004-5658-Z0BW***	WIRE CRIMPER	1
B02	***7004-5658-Z0BA***	ANVIL	1
B03	7004-5658 B03	DIE BASE	1
B05	B05	STOPPER PLATE	1
B08	7004-5658 B08	MAIN BLOCK	1
B09	7004-5658 B09	SLIDER	1
B15	B15	FRAME SPACER	1
B41S	41P00000811	SPRING	2