PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A0202230

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7004-5657 G1 SEQUENCE Nº 9






Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5657-02	*	**BC**	**YSD-4514127911**	**MLER TRUCK BEV**

Applicable Terminals for this Tool:

7004-5657-02				

Anvil			Wire Crimper			Insulation Crimper		
7004-5657-Z0BA		(N)	7004-5657-Z0BW		(N)	NA		
CW (c)	*CW (i)*		*CW*			*CW*		


1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	**NA**	0~2.00mm 0~0.20mm	0 1.16		The Bell Mouth is within the spec.**(*)**	**O**
	Not found any Bell Mouth in the insulation area.	**NA**				The dimension of the cutting carrier is within the spec.**(*)**	**NA**
	The lance height and shape are not deformed.	**NA**	3º 3º	- 0.6		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**NA**	0~2.00mm	0.57		The exposed conductor is within the spec.(*)	**O**
	Not found any crack in the terminal.	**O**	3º	0.1		The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**	2º	0.01		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

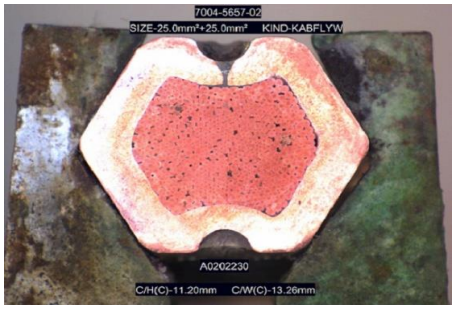2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	11,2	11,20	6,94
	+/-0.2		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range 50.0mm²~50.0mm²

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2025/jan/21	Date: 2025/jan/21	Date: 2025/jan/15

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A0202230

LOWER WIRE KIND & SIZE

Wire kind:	KABFLYW	+	KABFLYW	
Wire size:	25	+	25	mm^2
Nominal Cr. Height:	11,2		NA	mm
+/-	0,2		NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	11,203	
2	11,212	
3	11,199	
4	11,198	
5	11,206	
6	11,199	
7	11,191	
8	11,195	
9	11,206	
10	11,191	
11	11,201	
12	11,208	
13	11,211	
14	11,192	
15	11,202	
16	11,215	
17	11,202	
18	11,202	
19	11,205	
20	11,196	
21	11,213	
22	11,194	
23	11,199	
24	11,213	
25	11,209	
26	11,196	
27	11,200	
28	11,214	
29	11,195	
30	11,199	
31	11,205	
32	11,197	
33	11,213	
34	11,205	
35	11,212	
36	11,214	
37	11,205	
38	11,215	
39	11,203	
40	11,189	
41	11,186	
42	11,205	
43	11,217	
44	11,224	
45	11,203	
46	11,220	
47	11,228	
48	11,208	
49	11,205	
50	11,223	
Average	11,20	
Cmk	6,94	

UPPER WIRE KIND & SIZE

Wire kind:	NA	+	NA	
Wire size:	NA	+	NA	mm^2
Nominal Cr. Height:	NA		NA	mm
+/-	NA		NA	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END

APP BATTERY CABLE CONSUMABLE PART LIST

A0202230	7004-5657G1

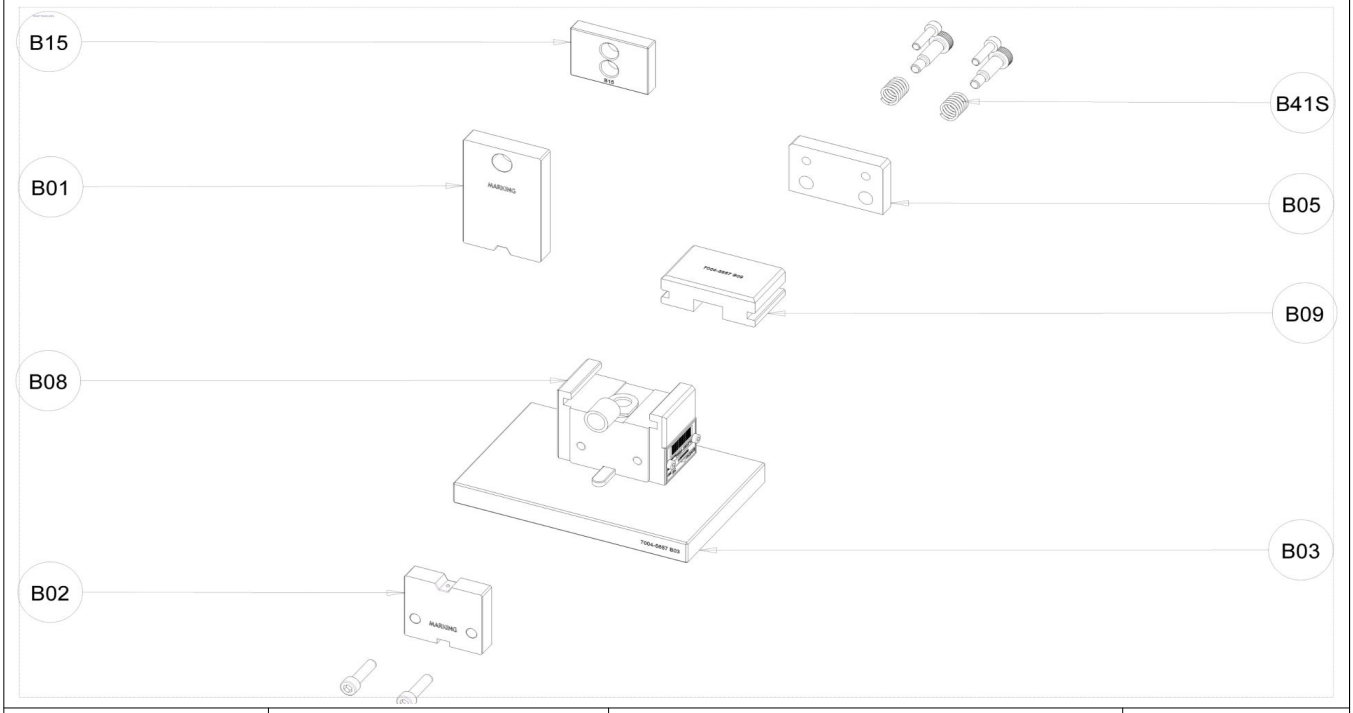

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
B01	***7004-5657-Z0BW***	WIRE CRIMPER	1
B02	***7004-5657-Z0BA***	ANVIL	1
B03	7004-5657 B03	DIE BASE	1
B05	B05	STOPPER PLATE	1
B08	7004-5657 B08	MAIN BLOCK	1
B09	7004-5657 B09	SLIDER	1
B15	B15	FRAME SPACER	1
B41S	41P00000811	SPRING	2