PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A0202231

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7004-5658 G1 SEQUENCE Nº 9








Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5658-02	*	**BC**	**YSD 4514127911**	**ILER TRUCK BEV**

Applicable Terminals for this Tool:

7004-5658-02			

Anvil		Wire Crimper		Insulation Crimper	
7004-5658-Z0BA	(N)	7004-5658-Z0BW	(N)	NA	
CW (c) 10,34	*CW (i)*	*CW* 10,34		*CW*	


1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
							O - ok X - ng NA - not aplicable
	The two sides of the insulation grips are in the correct position.	O	0.00~2.00mm 0.00~2.00mm	0.33 0.24		The Bell Mouth is within the spec.(*)	O
	Not found any Bell Mouth in the insulation area.	O				The dimension of the cutting carrier is within the spec.(*)	NA
	The lance height and shape are not deformed.	O	3º 3º	1.8 --		Bend up and Bend down are within the criteria(*)	O
	Not found any burr in the cutting carrier.	O	0.00~2.00mm	1.66		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	3º	0.4		The terminal is not bent sideway, look-king from the top(*)	O
	The wire barrel is free from major burrs.	O	2º	0.2		The body of the terminal is not twisted(*)	O

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

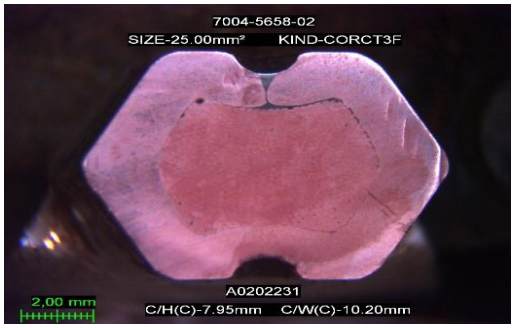2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	7,95	7,95	11,82
	+/-0.2		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range 25.00mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
Date: 2024/dez/17	Date: 2024/dez/13	Date: 2024/dez/12

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A0202231

LOWER WIRE KIND & SIZE

Wire kind:	CORCT3F		
Wire size:	25		mm^2
Nominal Cr. Height:	7,95	NA	mm
+/-	0,2	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	7,950	
2	7,953	
3	7,958	
4	7,956	
5	7,947	
6	7,958	
7	7,953	
8	7,944	
9	7,959	
10	7,943	
11	7,947	
12	7,955	
13	7,947	
14	7,957	
15	7,956	
16	7,958	
17	7,947	
18	7,958	
19	7,943	
20	7,947	
21	7,955	
22	7,959	
23	7,957	
24	7,958	
25	7,943	
26	7,958	
27	7,947	
28	7,958	
29	7,956	
30	7,947	
31	7,943	
32	7,950	
33	7,944	
34	7,947	
35	7,943	
36	7,950	
37	7,956	
38	7,947	
39	7,958	
40	7,959	
41	7,957	
42	7,947	
43	7,950	
44	7,947	
45	7,956	
46	7,947	
47	7,953	
48	7,944	
49	7,950	
50	7,956	
Average	7,95	
Cmk	11,82	

UPPER WIRE KIND & SIZE

Wire kind:	NA	+	NA	
Wire size:	NA	+	NA	mm^2
Nominal Cr. Height:	NA		NA	mm
+/-	NA		NA	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END

APP BATTERY CABLE CONSUMABLE PART LIST

A0202231	7004-5658G1

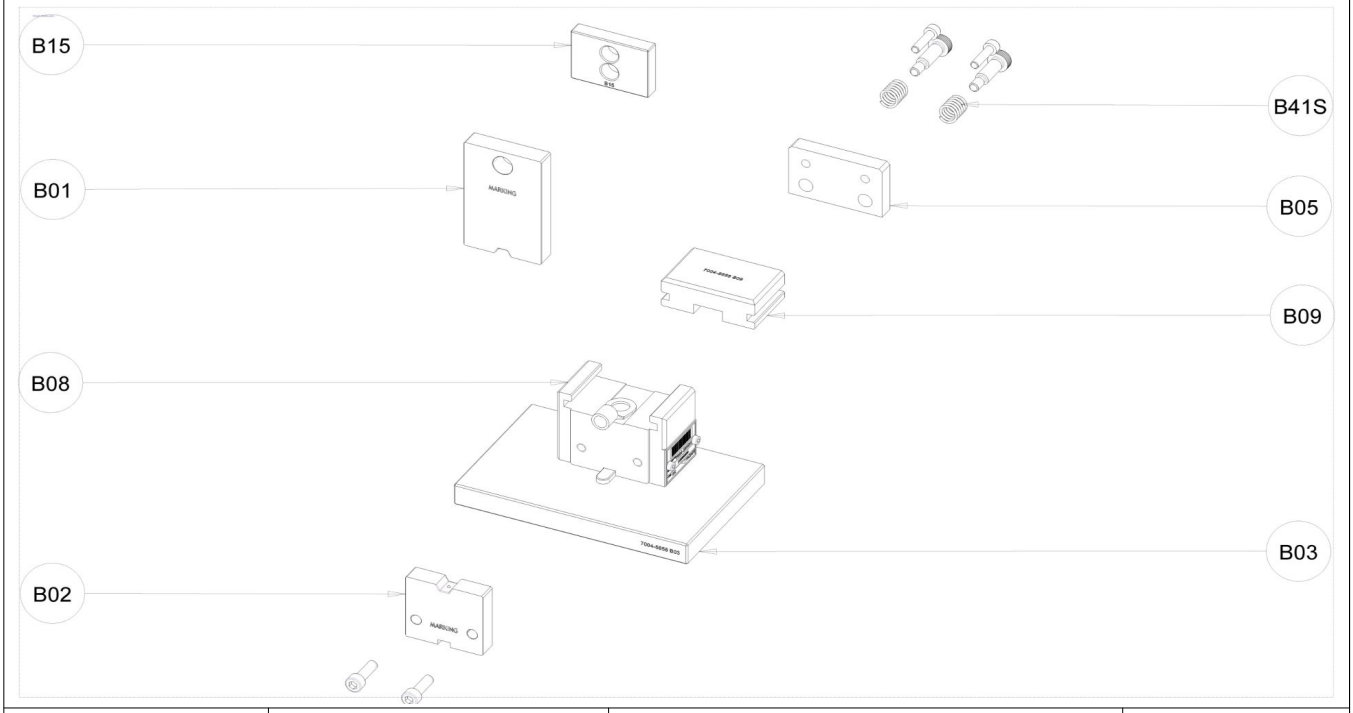

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
B01	***7004-5658-Z0BW***	WIRE CRIMPER	1
B02	***7004-5658-Z0BA***	ANVIL	1
B03	7004-5658 B03	DIE BASE	1
B05	B05	STOPPER PLATE	1
B08	7004-5658 B08	MAIN BLOCK	1
B09	7004-5658 B09	SLIDER	1
B15	B15	FRAME SPACER	1
B41S	41P00000811	SPRING	2