PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A0202232

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7004-5625 G1 SEQUENCE Nº 9






Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5625-02	*	**BC**	**YSD-4514127911**	**MLER TRUCK BEV**

Applicable Terminals for this Tool:

7004-5625-02							

Anvil		Wire Crimper		Insulation Crimper	
7004-5625-Z0BA	(N)	7004-5625-Z0BW	(N)	NA	
CW (c)	*CW (i)*	*CW*		*CW*	


1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
	The two sides of the insulation grips are in the correct position.	**NA**	-	-		The Bell Mouth is within the spec.**(*)**	**NA**
	Not found any Bell Mouth in the insulation area.	**NA**	-	-		The dimension of the cutting carrier is within the spec.**(*)**	**NA**
	The lance height and shape are not deformed.	**NA**	3º 3º	1.1 -		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**NA**	0~2.00mm	0.90		The exposed conductor is within the spec.(*)	**O**
	Not found any crack in the terminal.	**O**	3º	0.6		The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**	3º	0.7		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

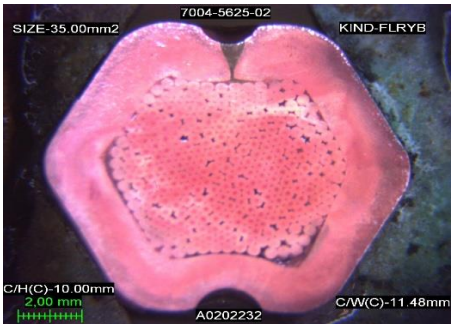2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	10	10,01	9,45
	+/-0.2		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range-35.00~35.00mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
Date: 2024/dez/17	Date: 2024/dez/11	Date: 2024/dez/11

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A0202232

LOWER WIRE KIND & SIZE

Wire kind:	FLRYB		
Wire size:	35		mm^2
Nominal Cr. Height:	10	NA	mm
+/-	0,2	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	10,004	
2	10,004	
3	10,005	
4	10,002	
5	10,002	
6	10,002	
7	10,012	
8	10,008	
9	10,005	
10	10,002	
11	10,005	
12	10,007	
13	10,014	
14	10,011	
15	10,008	
16	10,007	
17	10,010	
18	10,014	
19	10,010	
20	10,006	
21	10,004	
22	10,010	
23	10,016	
24	10,013	
25	10,008	
26	10,005	
27	10,003	
28	10,007	
29	10,010	
30	10,011	
31	9,998	
32	9,999	
33	9,999	
34	10,000	
35	10,012	
36	10,011	
37	10,005	
38	9,998	
39	10,000	
40	10,012	
41	10,007	
42	9,997	
43	9,998	
44	9,989	
45	9,991	
46	9,993	
47	10,005	
48	10,015	
49	10,019	
50	10,023	
Average	10,01	
Cmk	9,45	

UPPER WIRE KIND & SIZE

Wire kind:	NA	+	NA	
Wire size:	NA	+	NA	mm^2
Nominal Cr. Height:	NA		NA	mm
+/-	NA		NA	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END

APP BATTERY CABLE CONSUMABLE PART LIST

A0202232	7004-5625G1

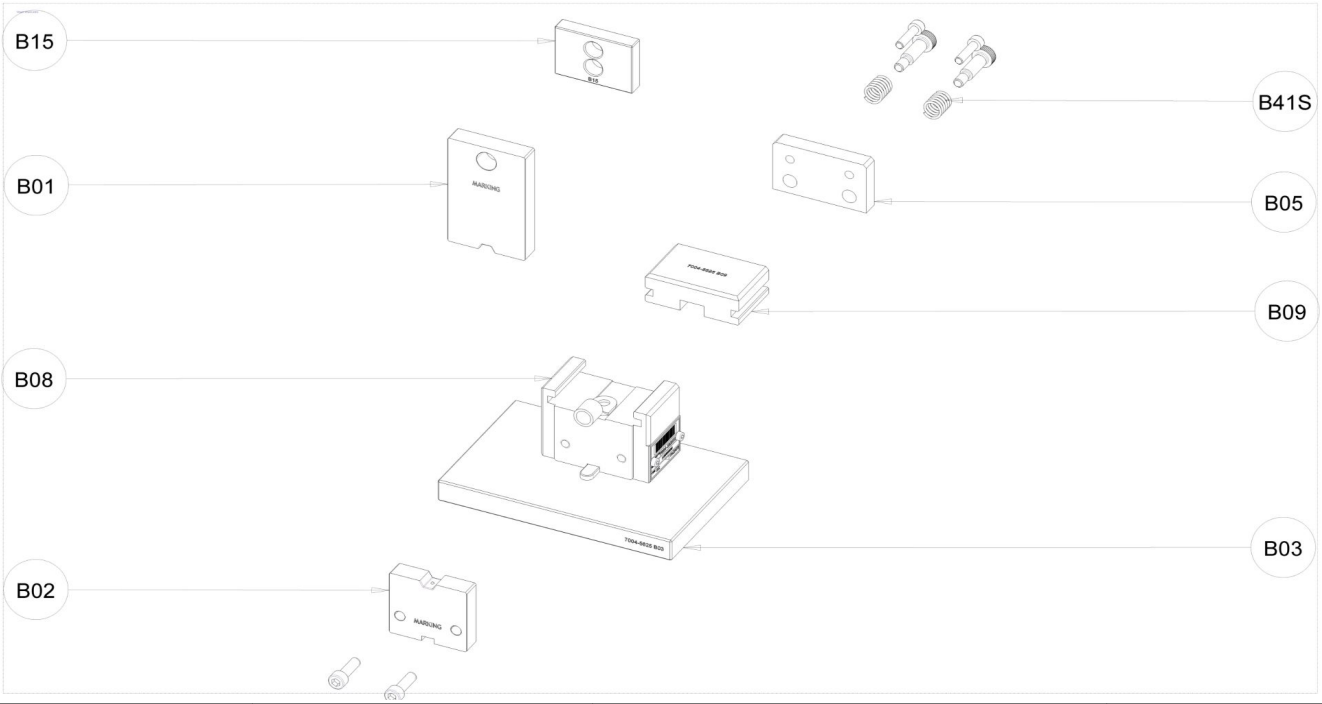

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
B01	***7004-5625-Z0BW***	WIRE CRIMPER	1
B02	***7004-5625-Z0BA***	ANVIL	1
B03	7004-5625 B03	DIE BASE	1
B05	B05	STOPPER PLATE	1
B08	7004-5625 B08	MAIN BLOCK	1
B09	7004-5625 B09	SLIDER	1
B15	B15	FRAME SPACER	1
B41S	41P00000811	SPRING	2