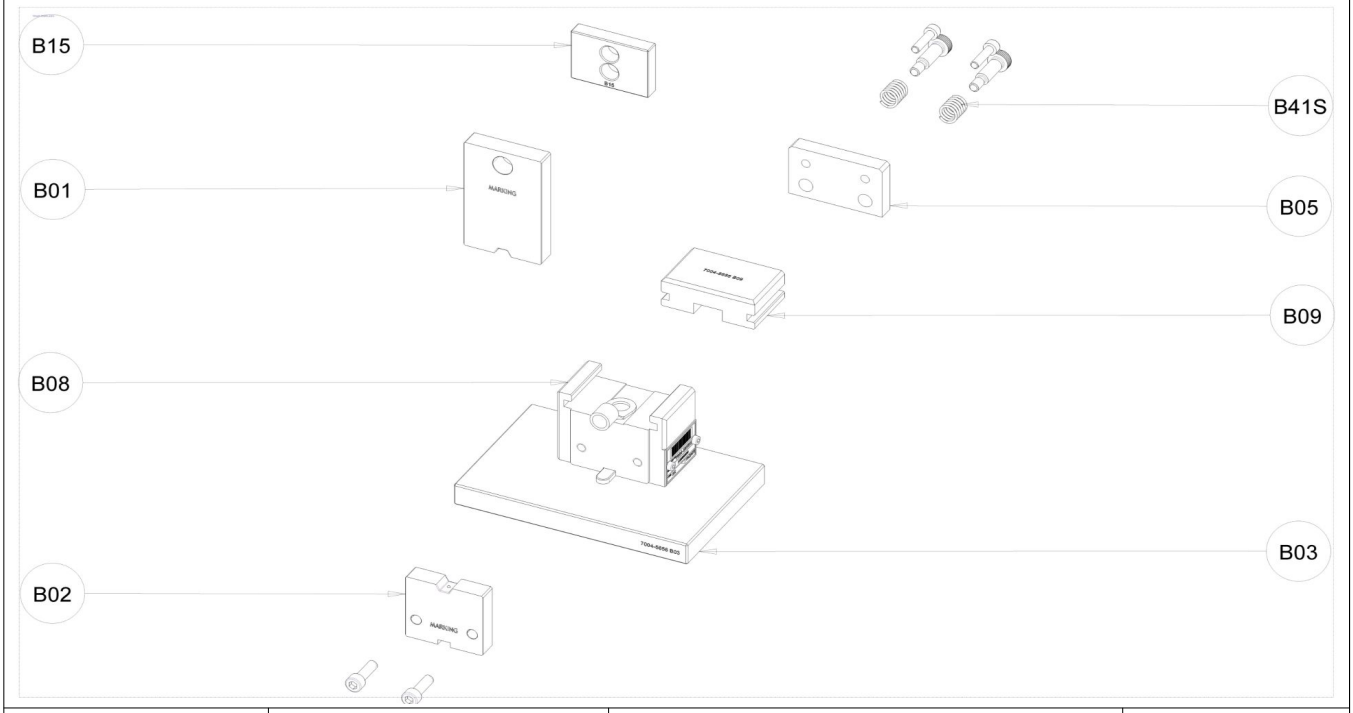
APP BATTERY CABLE CONSUMABLE PART LIST

A0202233	7004-5656G1



NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
B01	***7004-5656-Z0BW***	WIRE CRIMPER	1
B02	***7004-5656-Z0BA***	ANVIL	1
B03	7004-5656 B03	DIE BASE	1
B05	B05	STOPPER PLATE	1
B08	7004-5656 B08	MAIN BLOCK	1
B09	7004-5656 B09	SLIDER	1
B15	B15	FRAME SPACER	1
B41S	41P00000811	SPRING	2

PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A0202233

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7004-5656 G1 SEQUENCE Nº 9








Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5656-02	*	**BC**	**YSD-4514127911**	**MLER TRUCK BEV**

Applicable Terminals for this Tool:

7004-5656-02							

Anvil		Wire Crimper		Insulation Crimper	
7004-5656-Z0BA	(N)	7004-5656-Z0BW	(N)	NA	
CW (c)	*CW (i)*	*CW*		*CW*	

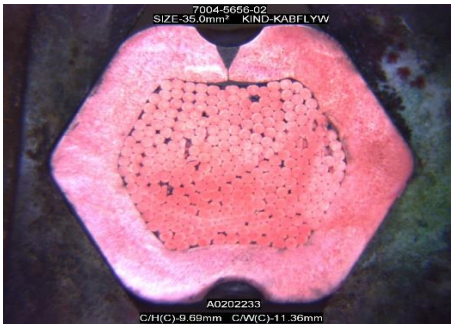
1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
	The two sides of the insulation grips are in the correct position.	**NA**	0~2.00mm 0~2.00mm	0.35 0		The Bell Mouth is within the spec.**(*)**	**O**
	Not found any Bell Mouth in the insulation area.	**NA**				The dimension of the cutting carrier is within the spec.**(*)**	**NA**
	The lance height and shape are not deformed.	**NA**	3º 3º	- 0.7		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**NA**	0~2.00mm	1.17		The exposed conductor is within the spec.(*)	**O**
	Not found any crack in the terminal.	**O**	3º	0.3		The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**	3º	0.01		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	9,7	9,70	9,84
	+/-0.2		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range 35.0mm²~35.0mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2025/jan/09	Date: 2025/jan/09	Date: 2025/jan/09

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A0202233

LOWER WIRE KIND & SIZE

Wire kind:	KABFLYW		
Wire size:	35		mm^2
Nominal Cr. Height:	9,7	NA	mm
+/-	0,2	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	9,707	
2	9,704	
3	9,704	
4	9,704	
5	9,701	
6	9,713	
7	9,700	
8	9,696	
9	9,696	
10	9,689	
11	9,704	
12	9,697	
13	9,708	
14	9,699	
15	9,688	
16	9,699	
17	9,701	
18	9,687	
19	9,702	
20	9,694	
21	9,697	
22	9,703	
23	9,691	
24	9,687	
25	9,697	
26	9,703	
27	9,692	
28	9,695	
29	9,702	
30	9,690	
31	9,705	
32	9,688	
33	9,704	
34	9,692	
35	9,698	
36	9,703	
37	9,689	
38	9,686	
39	9,700	
40	9,703	
41	9,688	
42	9,696	
43	9,686	
44	9,696	
45	9,698	
46	9,686	
47	9,694	
48	9,704	
49	9,697	
50	9,695	
Average	9,70	
Cmk	9,84	

UPPER WIRE KIND & SIZE

Wire kind:	NA	+	NA	
Wire size:	NA	+	NA	mm^2
Nominal Cr. Height:	NA		NA	mm
+/-	NA		NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END