PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A0202234

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7004-5656 G1 SEQUENCE Nº 9





Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5656-02	*	**BC**	**YSD-4514127911**	**MLER TRUCK BEV**



Applicable Terminals for this Tool:

7004-5656-02							

Anvil		Wire Crimper		Insulation Crimper	
7004-5656-Z0BA	(N)	7004-5656-Z0BW	(N)	NA	
CW (c)	*CW (i)*	*CW*		*CW*	

1 - VISUAL / MEASURED CHECK ITEMS

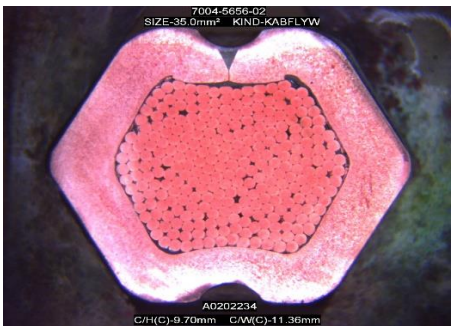
	The two sides of the insulation grips are in the correct position.	**NA**
	Not found any Bell Mouth in the insulation area.	**NA**
	The lance height and shape are not deformed.	**NA**
	Not found any burr in the cutting carrier.	**NA**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
0~2.00mm 0~2.00mm	0 0		The Bell Mouth is within the spec.**(*)**	**O**
			The dimension of the cutting carrier is within the spec.**(*)**	**NA**
3º 3º	- 1.4		Bend up and Bend down are within the criteria**(*)**	**O**
0~2.00mm	1.31		The exposed conductor is within the spec.(*)	**O**
3º	0.2		The terminal is not bent sideway, look-king from the top**(*)**	**O**
3º	0.01		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	9,7	9,70	6,55
	+/-0.2		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range 35.0mm²~35.0mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2025/jan/09	Date: 2025/jan/09	Date: 2025/jan/09

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A0202234

LOWER WIRE KIND & SIZE

Wire kind: KABFLYW

Wire size: 35 mm²

Nominal Cr. Height:	9,7	NA	mm
+/-	0,2	NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	9,695	
2	9,702	
3	9,691	
4	9,692	
5	9,701	
6	9,689	
7	9,686	
8	9,675	
9	9,690	
10	9,676	
11	9,694	
12	9,682	
13	9,694	
14	9,700	
15	9,711	
16	9,693	
17	9,703	
18	9,695	
19	9,702	
20	9,688	
21	9,701	
22	9,697	
23	9,701	
24	9,705	
25	9,697	
26	9,713	
27	9,694	
28	9,718	
29	9,696	
30	9,715	
31	9,718	
32	9,701	
33	9,688	
34	9,714	
35	9,691	
36	9,709	
37	9,693	
38	9,711	
39	9,703	
40	9,695	
41	9,702	
42	9,700	
43	9,717	
44	9,694	
45	9,715	
46	9,694	
47	9,707	
48	9,695	
49	9,695	
50	9,702	
Average	9,70	
Cmk	6,55	

UPPER WIRE KIND & SIZE

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm

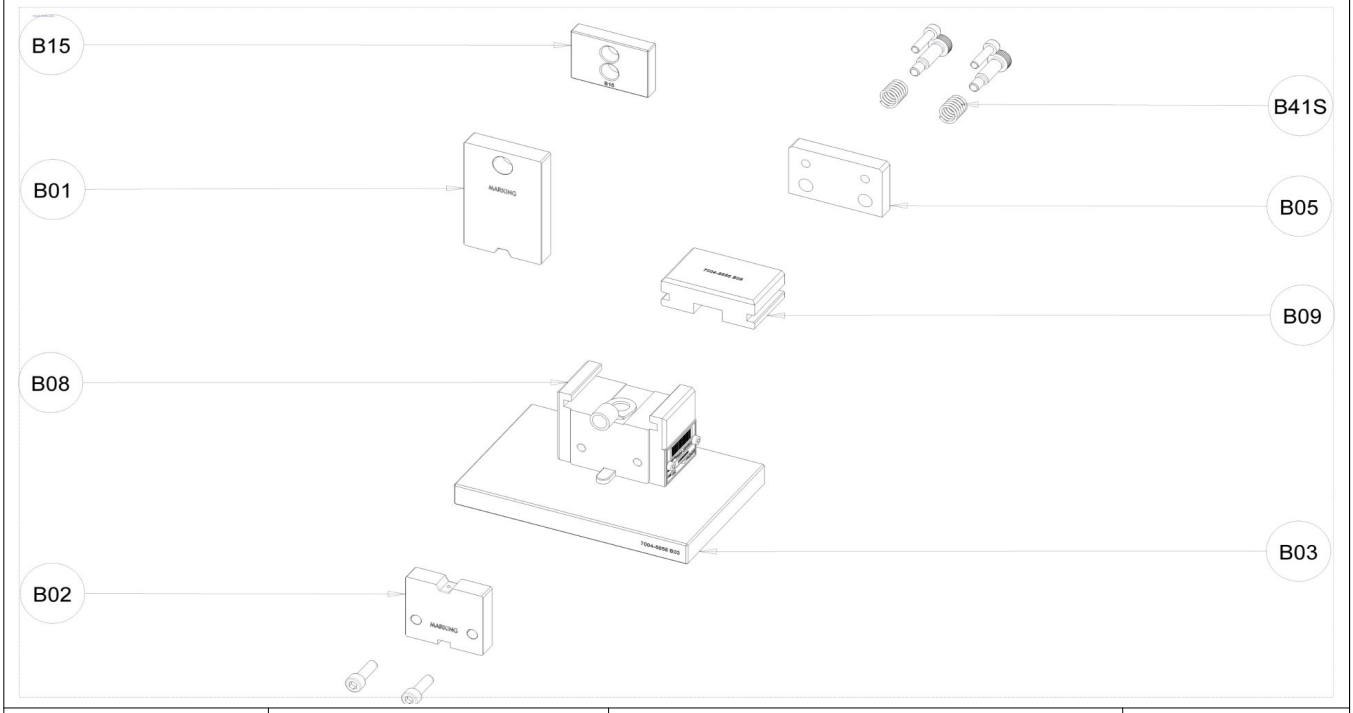
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END

APP BATTERY CABLE CONSUMABLE PART LIST

A0202234	7004-5656G1



NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
B01	***7004-5656-Z0BW***	WIRE CRIMPER	1
B02	***7004-5656-Z0BA***	ANVIL	1
B03	7004-5656 B03	DIE BASE	1
B05	B05	STOPPER PLATE	1
B08	7004-5656 B08	MAIN BLOCK	1
B09	7004-5656 B09	SLIDER	1
B15	B15	FRAME SPACER	1
B41S	41P00000811	SPRING	2