PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A0202325

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7115-5425 G1 SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7115-5425-06	*	**B C**	**YSD-4514280315**	**ILER TRUCK XVK**

Applicable Terminals for this Tool:

7115-5425-06

Anvil		Wire Crimper		Insulation Crimper	
7115-5425-Z0BA	(N)	7115-5425-Z0BW	(N)	NA	
CW (c) 7.40	*CW (i)*	*CW* 7.00		*CW*	


1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
						O - ok **X** - ng **NA** - not aplicable	
	The two sides of the insulation grips are in the correct position.	**NA**				The Bell Mouth is within the spec.**(*)**	**NA**
	Not found any Bell Mouth in the insulation area.	**NA**				The dimension of the cutting carrier is within the spec.**(*)**	**NA**
	The lance height and shape are not deformed.	**NA**	2º 2º	0.8 -		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**NA**				The exposed conductor is within the spec.(*)	**NA**
	Not found any crack in the terminal.	**O**				The terminal is not bent sideway, look-king from the top**(*)**	**NA**
	The wire barrel is free from major burrs.	**O**	2º	0.1		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

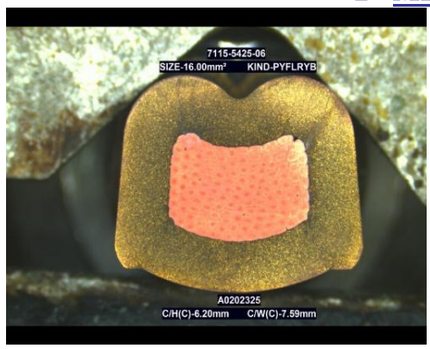2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk		NOMINAL	AVERAGE	Cmk
mm	6.2	6.20	5.69	mm	NA		
	+/-0.1				**+/-NA**		

REMARKS:
Aplicable wire range 16.00mm²~16.00mm².

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) nº 3485	CHECKED (Operator) nº 44	PREPARED (Operator) nº 2988
		Vitor Hugo
Date: 2026/jan/28	Date: 2026/jan/28	Date: 2626/jan/28

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A0202325

LOWER WIRE KIND & SIZE

Wire kind:	PYFLRYB		
Wire size:	16		mm^2
Nominal Cr. Height:	6.2	NA	mm
+/-	0.1	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	6.207	
2	6.207	
3	6.205	
4	6.204	
5	6.194	
6	6.207	
7	6.208	
8	6.199	
9	6.204	
10	6.194	
11	6.197	
12	6.201	
13	6.207	
14	6.209	
15	6.197	
16	6.197	
17	6.204	
18	6.207	
19	6.208	
20	6.204	
21	6.197	
22	6.204	
23	6.192	
24	6.193	
25	6.205	
26	6.206	
27	6.195	
28	6.194	
29	6.201	
30	6.206	
31	6.192	
32	6.190	
33	6.199	
34	6.205	
35	6.195	
36	6.192	
37	6.199	
38	6.204	
39	6.207	
40	6.197	
41	6.197	
42	6.203	
43	6.206	
44	6.200	
45	6.195	
46	6.195	
47	6.202	
48	6.194	
49	6.185	
50	6.196	
Average	6.20	
Cmk	5.69	

UPPER WIRE KIND & SIZE

Wire kind:	NA	+	NA	
Wire size:	NA	+	NA	mm^2
Nominal Cr. Height:	NA		NA	mm
+/-	NA		NA	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2.0

END

APP BATTERY CABLE CONSUMABLE PART LIST

A0202325	7115-5425G1

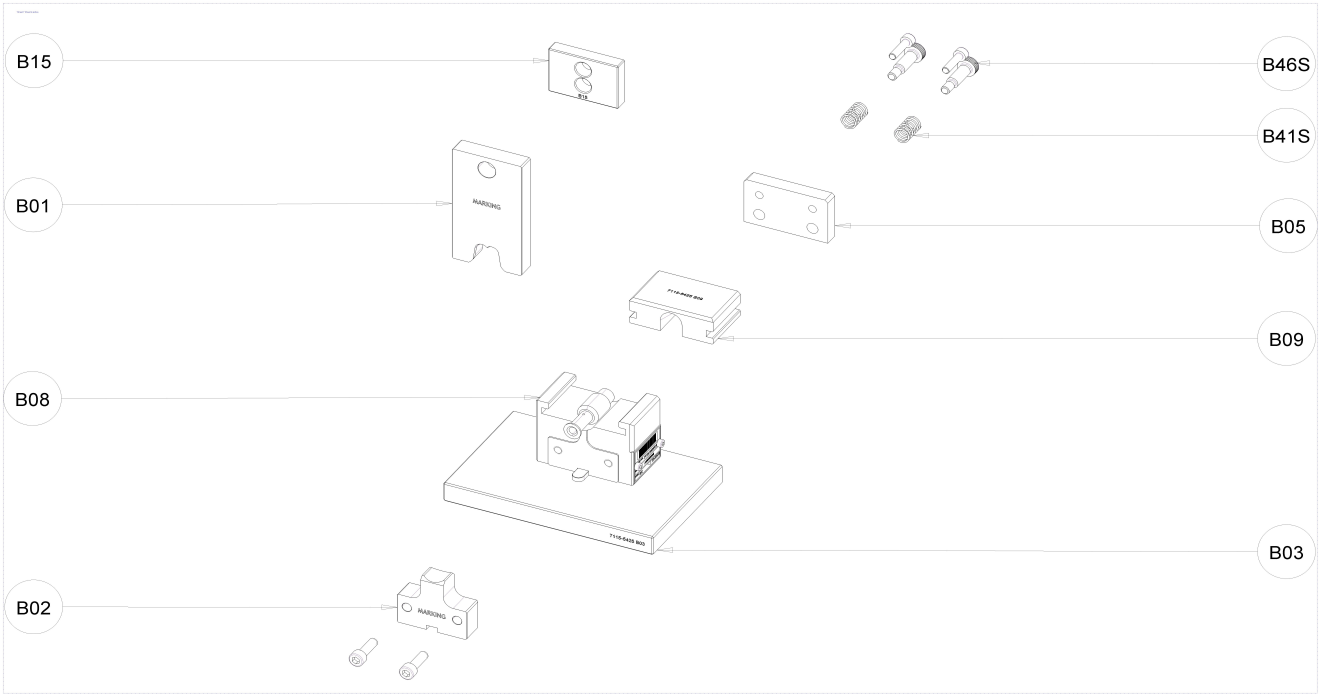

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
B01	***7115-5425-Z0BW***	WIRE CRIMPER	1
B02	***7115-5425-Z0BA***	ANVIL	1
B03	7115-5425 B03	DIE BASE	1
B05	B05	STOPPER PLATE	1
B08	7115-5425 B08	MAIN BLOCK	1
B09	7115-5425 B09	SLIDER	1
B15	B15	FRAME SPACER	1
B41S	41P00000811	SPRING	2
B46S	Ø8 x 20 (ISO 7379)	SHOULDER SCREW	2