PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A0202326

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70041843 G1 SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-1843-02	*	BC	4514310934	DAIMLER TRUCK - XVK81

Applicable Terminals for this Tool:

7004-1843-02							

Anvil			Wire Crimper			Insulation Crimper		
7004-1843-Z0BA		(N)	7004-1843-Z0BW		(N)	NA		(NA)
CW (c)	10.34	*CW (i)* NA	*CW*	10.34		*CW*	NA	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	NA	1.5 - 2.5 mm	1.98		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	NA				The dimension of the cutting carrier is within the spec.	NA
	The lance height and shape are not deformed.	NA	0 - 2 ° 0 - 2 °	1.6		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	NA				The exposed conductor is within the spec.	NA
	Not found any crack in the terminal.	O	0 - 3 mm	0.2		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 3 mm	0.2		The body of the terminal is not twisted.	O

O - ok **X** - ng **NA** - not aplicable


(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES

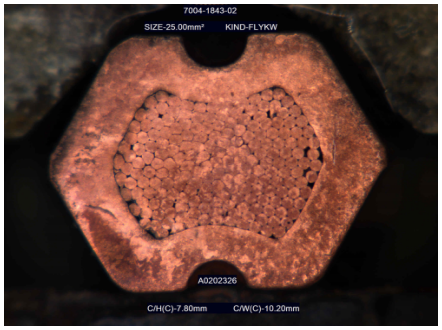

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk		NOMINAL	AVERAGE	Cmk
mm	7.8	7.80	9.64	mm			
	+/- **0.1**				+/-		

REMARKS:

Applicable wire range-25.00~25.00mm²

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION

NOT SUITABLE [ ]

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº2624
Date: 02/03/2026	Date: 26/02/2026	Date: 26/02/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

A0202326

LOWER WIRE KIND & SIZE

C/W(l): mm

Wire kind: FLYKW

Wire size: 25 mm²

Nominal Cr. Height:	7.8	NA	mm
+/-	0.1	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	7.796	
2	7.801	
3	7.796	
4	7.804	
5	7.801	
6	7.797	
7	7.805	
8	7.804	
9	7.801	
10	7.803	
11	7.796	
12	7.804	
13	7.796	
14	7.805	
15	7.801	
16	7.804	
17	7.797	
18	7.796	
19	7.803	
20	7.804	
21	7.805	
22	7.804	
23	7.805	
24	7.804	
25	7.797	
26	7.804	
27	7.803	
28	7.804	
29	7.796	
30	7.804	
31	7.801	
32	7.804	
33	7.797	
34	7.796	
35	7.803	
36	7.804	
37	7.797	
38	7.804	
39	7.797	
40	7.805	
41	7.803	
42	7.801	
43	7.804	
44	7.796	
45	7.804	
46	7.801	
47	7.804	
48	7.797	
49	7.796	
50	7.803	
Average	7.80	
Cmk	9.64	

UPPER WIRE KIND & SIZE

C/W(l): mm

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk >= 2

END

APP BATTERY CABLE CONSUMABLE PART LIST

A0202326 | **7004-1843G1**

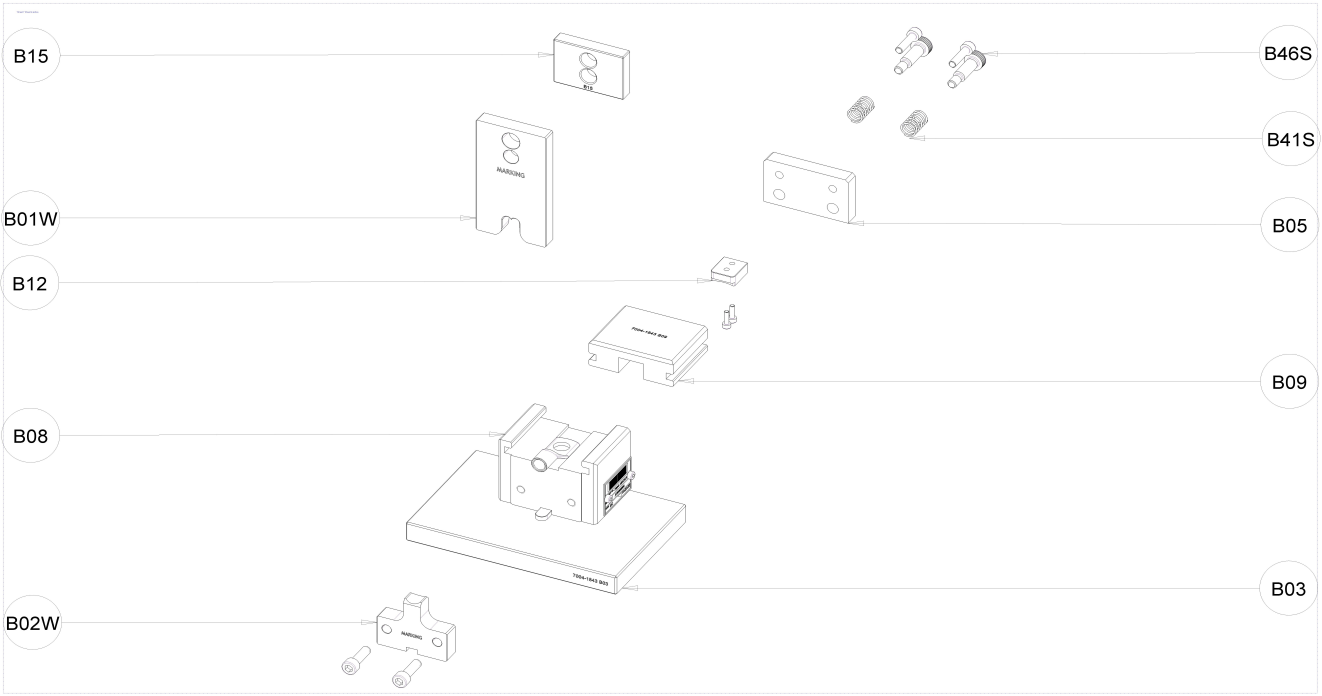

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
B01	***7004-1843-Z0BW***	WIRE CRIMPER	1
B02	***7004-1843-Z0BA***	ANVIL	1
B03	7004-1843 B03	DIE BASE	1
B05	B05	STOPPER PLATE	1
B08	7004-1843 B08	MAIN BLOCK	1
B09	7004-1843 B09	SLIDER	1
B12	7004-1843 B12	TERMINAL STOPPER	1
B15	B15	FRAME SPACER	1
B41S	41P00000811	SPRING	2
B46S	Ø8 x 20 (ISO 7379)	SHOULDER SCREW	2