PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1100220







TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71162965 SEQUENCE Nº 9




Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-2965-02	*	**APTR**	**YSD-3500281552**	*

Anvil			Wire Crimper			Insulation Crimper		
7116-2965PAC		(N)	7116-2965PW		(N)	7116-2965PIC		(N)
CW (c)	3,22	*CW (i)* 4,47	*CW*	3,20		*CW*	4,47	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

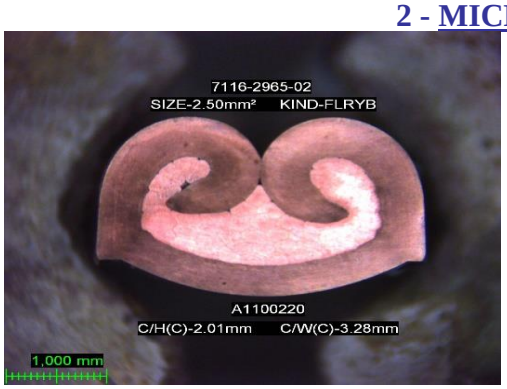
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

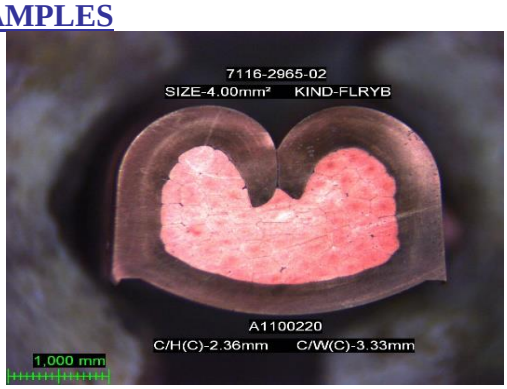
	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up and Bend down are within the criteria**(*)**	**O**
	The exposed conductor is within the spec.(*)	**O**
	The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	2	2,01	3,38
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	2,35	2,35	3,66
	+/-0.05		

REMARKS:

Aplicable wire range 2.50mm²~4.00mm².
Size 2.50mm² C/W(I)-4.52mm
Size 4.00mm² C/W(I)-4.57mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
		Vitor Hugo
Date: 2022/set/09	Date: 2022/ago/31	Date: 2022/ago/31

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A1100220

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 2,5 mm²

Nominal Cr. Height:	2	4	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,011	4,005
2	2,005	3,998
3	2,009	4,006
4	2,013	4,005
5	2,009	3,999
6	2,013	4,003
7	2,006	4,005
8	2,009	4,008
9	2,013	4,000
10	2,008	3,996
11	2,006	4,003
12	2,011	4,010
13	2,009	4,002
14	2,005	4,006
15	2,005	4,005
16	2,012	3,998
17	2,009	3,998
18	2,004	4,003
19	2,003	3,999
20	2,009	4,005
21	2,011	4,007
22	2,005	4,003
23	1,998	3,999
24	2,004	4,006
25	2,010	4,007
26	2,003	4,010
27	1,998	4,011
28	1,996	4,002
29	2,001	3,996
30	2,008	3,996
31	2,003	4,007
32	1,999	4,007
33	2,005	4,007
34	2,004	4,001
35	2,003	4,003
36	2,006	4,009
37	2,001	4,006
38	2,002	3,998
39	2,007	4,001
40	2,009	4,008
41	2,009	4,010
42	2,001	4,003
43	2,009	3,996
44	2,011	4,003
45	2,007	4,005
46	2,003	4,009
47	2,009	4,000
48	2,014	4,001
49	2,010	4,006
50	2,004	4,004
Average	2,01	4,00
Cmk	3,38	7,74

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 4 mm²

Nominal Cr. Height:	2,35	4,35	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,354	4,356
2	2,352	4,361
3	2,359	4,355
4	2,359	4,360
5	2,355	4,357
6	2,352	4,353
7	2,360	4,348
8	2,354	4,348
9	2,354	4,353
10	2,357	4,355
11	2,358	4,351
12	2,352	4,351
13	2,349	4,355
14	2,347	4,355
15	2,345	4,351
16	2,354	4,352
17	2,350	4,357
18	2,348	4,358
19	2,353	4,357
20	2,352	4,351
21	2,355	4,359
22	2,354	4,359
23	2,348	4,353
24	2,347	4,359
25	2,353	4,354
26	2,359	4,352
27	2,361	4,351
28	2,358	4,351
29	2,355	4,357
30	2,358	4,355
31	2,351	4,350
32	2,355	4,352
33	2,360	4,357
34	2,354	4,360
35	2,353	4,354
36	2,361	4,350
37	2,363	4,352
38	2,355	4,358
39	2,353	4,361
40	2,353	4,355
41	2,360	4,350
42	2,357	4,356
43	2,351	4,358
44	2,350	4,356
45	2,348	4,350
46	2,357	4,348
47	2,358	4,358
48	2,354	4,352
49	2,350	4,348
50	2,354	4,350
Average	2,35	4,35
Cmk	3,66	8,63

Acceptance criteria: Cmk>= 2,0

END

Product name	87 APPLICATOR (End feed)	Terminal No.	7116-2965C
Product No.	C0333S−0705		

Common No.			
	−	−	−
	−	−	−
	−	−	−

No.	Part No.	Drawing No.	Part name	QTY	Material	Notes	
			＜Common parts of side feed and end feed＞				
1	C0333L-0001-01A		SHANK	1	SK2	48A1901A	
2	C0333L-0001-002		SHANK ADJUSTING NUT	1	SK2	48A19002	
3	C0333L-0001-003		SHANK ADJUSTING SCREW	1	SK2	48A49003	
4	C0333L-0001-004		SHANK ADJUSTING SCREW SPACER	1	SK2	48A19004	
5	C0333L-0001-005		INSULATION CRIMPER DICE	1	SKS3	48A19005	
6	C0333L-0001-006		SHANK ADJUSTING SCREW SP.	1	SWP	48A19006	
7	C0333L-0001-007	-033	INSULATION ADJUSTING PIECE	1	SK3	48A19007	-033
8	C0333L-0001-008		INSULATION ADJUSTING PIECE SPACER	1	SK2	48A19008	
9	C0333L-0001-009		RAM GUIDE PLATE (A)	1	SK2	48A19009	
10	C0333L-0001-010		FEED ADJUSTING SCREW	1	SK2	48A19010	
11	C0333L-0001-011		PIVOT PIN	1	SK3	48A19011	
12	C0333L-0001-012		PIVOT BUSH	1	SK2	48A19012	
13	C0333L-0001-013		ADJUSTING PLATE	1	S45C	48A19013	
14	C0333L-0001-014		FEEDING LEVER (A)	1	SK2	48A19014	
15	C0333L-0001-015		FEEDING ROLLER	1	SCM3	48A19015	
16	C0333L-0001-016		FEEDING ROLLER SHAFT	1	SK2	48A19016	
17	C0333L-0001-017		FEEDING CLAW SPRING	1	SWP	48A19017	
18	C0333L-0001-018		RETURN SPRING	1	SWP	48A19018	
19	C0333L-0001-019	-045	BUSH	1	SK2	48A19019	-045
20	C0333L-0001-020		INSTALLATION PLATE POSITIONING BLOCK	1	SK2	48A19020	

Let	Date	Revision recode	No.	Revised	Requested / YSPO	Designed date / 25/07/2008	Issued mark
					Approved	Designed	
	25/07/2008						
					25/07/2008	25/07/2008	

Product name	87 APPLICATOR (End feed)	Terminal No.	7116-2965C
Product No.	C0333S−0705		

No.	Part No.	Drawing No.	Part name	QTY	Material	Notes	
21	C0333L-0001-058		INSTALLATION PLATE BLIND PLATE	1	SK2	48A19058	
22	C0333L-0001-021	-002	WIRE HOLDER	1	SK2	48A19021	-002
23	C0333L-0001-022	-002	CUTTING PUNCH/WIRE HOLDER	1	SKS3	48A19022	-002
24	C0333L-0001-023		WIRE HOLDER SPRING	2	SWP	48A19023	
	※Cutting punch carrier(C0333L-0001-059) must be used if the total thick size of crimpers over 9.1.						
25	C0333L-0001-059	-001	CUTTING PUNCH CRRIER	1	SK2	48A19059	-001
	※C0333L-0001-055,-056 must be used if applicator is applicable foe manual crimping machine.						
26	C0333L-0001-057		SAFETY COVER	1	ｱｸﾘﾙ	48A19057	
27	C0333L-0001-056		SAFETY COVER FIXING SCREW	1	S45C	48A19056	
	TERMINAL SCRAPER(C0333L-0001-047)must be used if applicator is applicable automatic crimping machine(AP						
28	C0333L-0001-047	-001	TERMINAL SCRAPER	1	SPC-C	48A19047	-001
	＜Parts used end feed applicater＞						
29	C0333S-0001-001		FRAME	1	FC25	48A20001	
30	C0333S-0001-002		RAM	1	SKS3	48A20002	
31	C0333S-0001-003		INSTALLATION PLATE	1	SK2	48A20003	
32	C0333S-0001-035		RAM GUIDE PLATE (B)	1	SK2	48A20035	
33	C0333S-0001-004		PIVOT BLOCK	1	SK2	48A20004	
34	C0333S-0001-005		FEEDING ROD	1	SK2	48A20005	
35	C0333S-0001-006		FEEDING ROD GUIDE PLATE	1	SK2	48A20006	
36	C0333S-0001-007		FEEDING CAM	1	SKS3	48A20007	
37	C0333S-0001-011		FEEDING LEVER (B)	1	SK2	48A20011	
38	C0333S-0001-012	-005	FEEDING CLAW	1	SK2	7116-2965C	PYF
39	C0333S-0001-013	-004	BASE	1	SK2	48A20013	-004
40	C0333S-0001-014	-001	TERMINAL GUIDE PLATE A	1	SK2	7116-2965C	PYG

Let	Date	Revision recode	No.	Revised	Requested / Designed date	Approved	Designed	Issued mark
					YSPO			
					25/07/2008			
	25/07/2008				0	0		
					25/07/2008	25/07/2008		

Product name	87 APPLICATOR (End feed)	Terminal No.	7116-2965C
Product No.	C0333S−0705		

No.	Part No.	Drawing No.	Part name	QTY	Material	Notes	
41	C0333S-0001-015	-001	TERMINAL GUIDE PLATE B	1	SK2	7116-2965C	PYH
42	C0333S-0001-016	-002	ADJUSTING BLOCK	1	S45C	48A20016	-002
43	C0333S-0001-017	-001	TERMINAL HOLDER	1	SK2	48A20017	-001
44	C0333S-0001-018	-001	TERMINAL HOLDER SET PARTS	1	SK2	48A20018	-001
45	C0333S-0001-019		TERMINAL HOLDER GUIDE PIN	4	SK2	48A20019	
46	C0333S-0001-008	-006	SUPPORTING STOPPER	1	SK2	48A20008	-006
47	C0333S-0001-009		SUPPORTING STOPPER GUIDE	1	SK2	48A20009	
48	C0333S-0001-010		SUPPORTING STOPPER SP.	1	SWP	48A20010	
※C0333S-0001-021,-022,-023,-024,-038 must be used if applicator is applicable foe manual crimping machine.							
49	C0333S-0001-021	-002	WIRE STOPPER	1	SK2	48A20021	-002
50	C0333S-0001-022		WIRE STOPPER SHAFT	1	SK2	48A20022	
51	C0333S-0001-023		WIRE STOPPER ADJUSTING PLATE	1	S45C	48A20023	
52	C0333S-0001-024		WIRE STOPPER ADJUSTING PIECE	1	S45C	48A20024	
53	C0333S-0001-038		Spacer of wire stopper		Hardened stee	48A20038	As the case may be use
54	C0333S-0001-025	-026	SHEAR BLADE SPACER	1	SK2	48A20025	-026
55	C0333S-0001-026		SHEAR BLADE ADJUSTING SPACER	2	SK2	48A20026	
56	C0333S-0001-027	-006	SHEAR BLADE	1	SKS3	-006	PS(?.?)
57	C0333S-0001-028	-004	FRONT SHEAR BLADE	1	SKS3	7116-2965C	PF
58	C0333S-0001-029	-016	REAR SHEAR BLADE	1	SKS3	-016	PR(AorB?.?)
59	C0333S-0001-030	7116-2965C	WIRE CRIMPER	1	S7	7116-2965	PW
60	C0333S-0001-031	7116-2965C	INSULATION CRIMPER	1	SUP9	7116-2965	PAC
61	C0333S-0001-032	7116-2965C	ANVIL	1	S7	7116-2965	PIC
62	C0333S-0001-033	-002	SHEAR BLADE HOLDER PLATE	1	SK2	7116-2965C	PZA
63	C0333S-0001-034	-010	TERMINAL UPPER PREVENTION PLATE	1	SK2	48A20034	-010

Let	Date	Revision recode	No.	Revised	Requested		Issued mark
					YSPO		
					Designed date		
					25/07/2008		
					Approved	Designed	
	25/07/2008				0	0	
					25/07/2008	25/07/2008	

Product name	87 APPLICATOR (End feed)	Terminal No.	7116-2965C
Product No.	C0333S－0705		

No.	Part No.	Drawing No.	Part name	QTY	Material	Notes
			＜Purchasing parts＞			
64	C0333L-0001-064		Φ5 STEEL BALL	1		48A19064
65	C0333L-0001-065		NUT of PIVOT BUSH	1	M12	Type 2 (48A19065)
66	C0333L-0001-066		WASSHER of PIVOT BUSH	1	M12	Type 2 (48A19066)
67	C0333L-0001-067		STROKE ADJUSTING HEX BOLT	1	M4×L35	48A19067
68	C0333L-0001-068		HEX.NUTS WITH FLANGE	5	M4	48A19068
69	C0333L-0001-069		FEEDING CLAW PIN	1	DOWEL PIN	Φ5,m6,L20 (48A19069)
70	C0333L-0001-070		FEEDING LEVER PIN	1	DOWEL PIN	Φ5,m6,L15 (48A19070)
71	C0333L-0001-071		FEEDING LEVER SHAFT	1	DOWEL PIN	Φ5,m6,L20 (48A19071)
72	C0333L-0001-072		PIN of INSUTALLATING FRAME	2	SPRING PIN	Φ5×L20 (48A19072)
73	C0333L-0001-074		TERMINAL HOLDER SPRING	4	SANESUBANE	A08-05 (48A20036)
74	C0333L-0001-072		PIN of INSUTALLATING FRAME	1	SPRING PIN	Φ5×L15 (48A20037)
75	C0333L-0001-075		MAGNET WASHER	(1)	775631	SMD No. (48A19075)
			＜Optional parts＞			
76	C0432-2851		COUNTER FOR APPLICATOR	1set	48ZZ300A	Applicable 87AP Side feed.
77	48A19201		BLIND PLATE	1		For crimp monitor
78	48A19202001		BLOCK	1	For Φ44	For crimp monitor
79	48A19202002		BLOCK	1	For Φ46	For crimp monitor
80	48A19203		DOG	1		For crimp monitor
81	48A20400		Easy(Unit preventing transformation terminal)	1		For 87AP End feed

Let	Date	Revision recode	No.	Revised
	25/07/2008			

Requested	
YSPO	
Designed date	
25/07/2008	
Approved	Designed
0	0
25/07/2008	25/07/2008

Issued mark