APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700478

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70092364 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7009-2364-02	*	**90 HAND FEED**	**YSD-XVK81**	*







Anvil		
7009-2364DAN		(N)
CW (c)	7,00	*CW (i)*





Wire Crimper		
7009-2364DW		(N)
CW	7,00	

Insulation Crimper	
CW	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

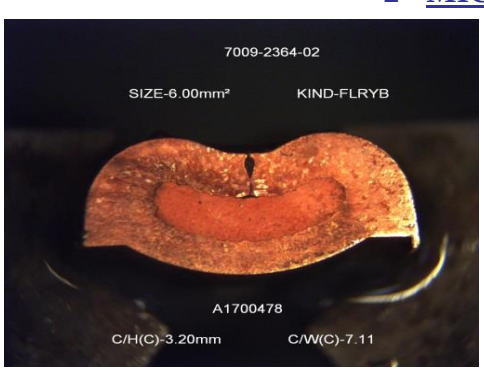
	The two sides of the insulation grips are in the correct position.	NA
	Not found any Bell Mouth in the insulation area.	NA
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	NA
	The wire barrel is free from major burrs.	O

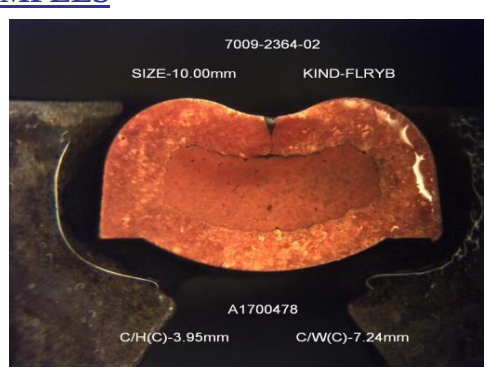
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	3,2	3,20	3,25
	+/-0.05		


	NOMINAL	AVERAGE	Cmk
mm	3,95	3,95	3,74
	+/-0.05		

REMARKS:

Aplicable wire range 6.00mm² ~ 10.00mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18597
		
Date: 2017-nov-23	Date: 2017-nov-21	Date: 2017-nov-20

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A1700478

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 6 mm^2

Nominal Cr. Height:	3,2	NA	mm
+/-	0,05	NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	3,202	
2	3,200	
3	3,196	
4	3,198	
5	3,201	
6	3,197	
7	3,199	
8	3,198	
9	3,210	
10	3,215	
11	3,213	
12	3,215	
13	3,203	
14	3,203	
15	3,204	
16	3,204	
17	3,207	
18	3,209	
19	3,206	
20	3,201	
21	3,206	
22	3,202	
23	3,207	
24	3,208	
25	3,208	
26	3,203	
27	3,203	
28	3,204	
29	3,199	
30	3,204	
31	3,198	
32	3,204	
33	3,199	
34	3,207	
35	3,202	
36	3,204	
37	3,204	
38	3,201	
39	3,197	
40	3,202	
41	3,201	
42	3,204	
43	3,201	
44	3,195	
45	3,203	
46	3,203	
47	3,198	
48	3,198	
49	3,196	
50	3,192	
Average	3,20	
Cmk	3,25	

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 10 mm^2

Nominal Cr. Height:	3,95	NA	mm
+/-	0,05	NA	mm

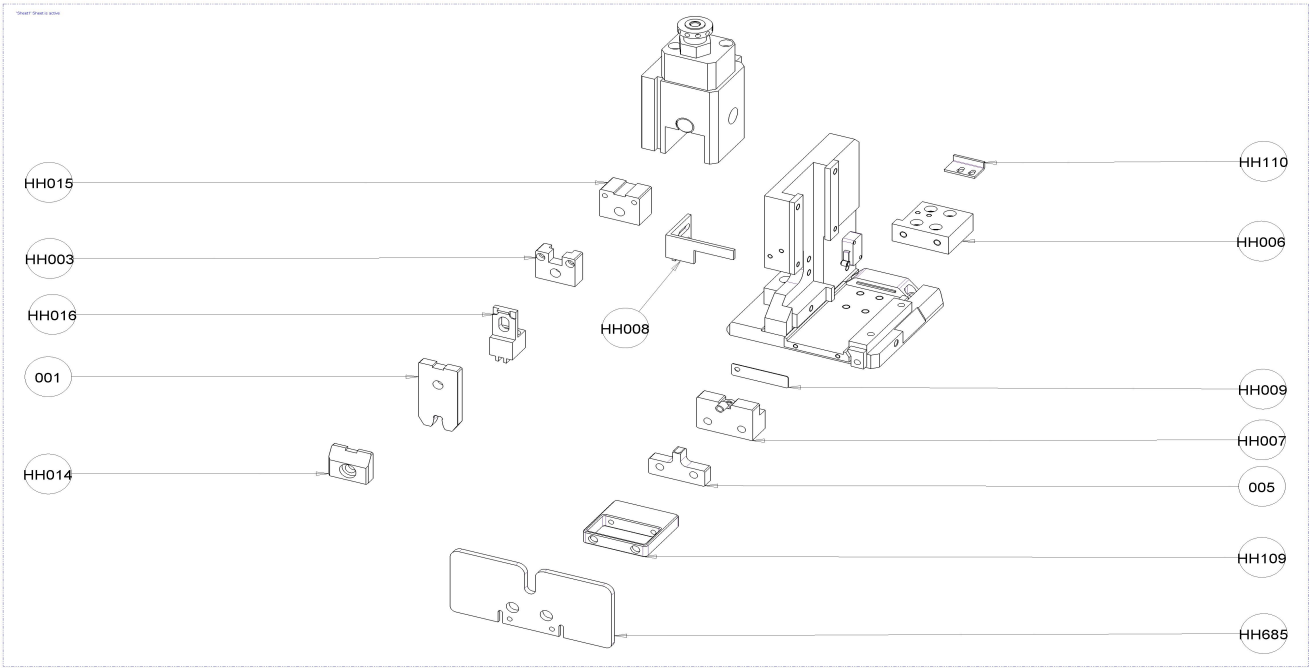
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	3,952	
2	3,946	
3	3,947	
4	3,949	
5	3,951	
6	3,953	
7	3,948	
8	3,954	
9	3,953	
10	3,958	
11	3,950	
12	3,951	
13	3,951	
14	3,947	
15	3,952	
16	3,951	
17	3,960	
18	3,950	
19	3,952	
20	3,946	
21	3,951	
22	3,944	
23	3,946	
24	3,942	
25	3,944	
26	3,950	
27	3,958	
28	3,943	
29	3,946	
30	3,943	
31	3,948	
32	3,942	
33	3,947	
34	3,947	
35	3,953	
36	3,953	
37	3,946	
38	3,953	
39	3,949	
40	3,952	
41	3,943	
42	3,945	
43	3,960	
44	3,947	
45	3,954	
46	3,946	
47	3,948	
48	3,951	
49	3,952	
50	3,947	
Average	3,95	
Cmk	3,74	

Acceptance criteria: Cmk>= 2

END

APP 90 SINGLE CONSUMABLE PART LIST

A1700478	**7009-2364**



NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7009-2364 DW***	WIRE CRIMPER	1
005W	***7009-2364 DAN***	WIRE ANVIL	1
HH003	7009-2364 HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7009-2364 HH007	TERMINAL HOLDER	1
HH008	HH008-3	STRIPPER	1
HH009	HH009	TERMINAL GUIDE	1
HH014	HH014	CRIMPER HOLDER	1
HH015	HH015	SPACER B	1
HH016	7009-2364 HH016	HOLD DOWN	1
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH685	HH685	SAFETY COVER FC143685	1