PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700479

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70092401 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7009-2401-02	*	**90 HAND FEED**	**YSD-XVK81**	*







Anvil		
7009-2401DAN		(N)
CW (c) 5,70	*CW (i)*	





Wire Crimper		
70092401DW		(N)
CW 5,70		

Insulation Crimper	
CW	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

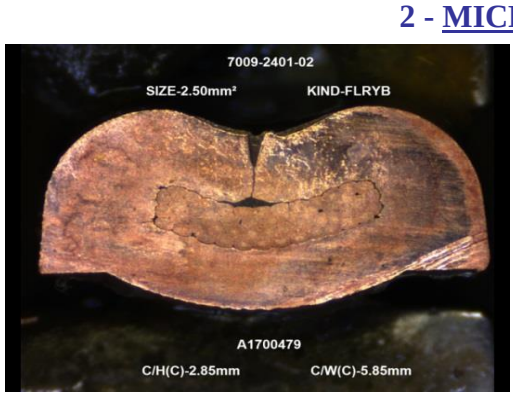
	The two sides of the insulation grips are in the correct position.	NA
	Not found any Bell Mouth in the insulation area.	NA
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	NA
	The wire barrel is free from major burrs.	O

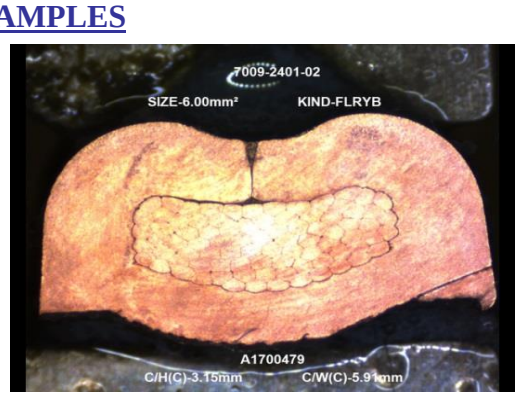
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	2,85	2,85	3,53
	+/-0.05		


	NOMINAL	AVERAGE	Cmk
mm	3,15	3,15	3,32
	+/-0.05		

REMARKS:

Aplicable wire range 2.50mm² ~ 6.00mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18597
		
Date: 2017-dez-28	Date: 2017-dez-22	Date: 2017-dez-21

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A1700479

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 2,5 mm^2

Nominal Cr. Height:	2,85	NA	mm
+/-	0,05	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	2,852	
2	2,851	
3	2,848	
4	2,850	
5	2,850	
6	2,848	
7	2,846	
8	2,849	
9	2,846	
10	2,849	
11	2,849	
12	2,851	
13	2,848	
14	2,852	
15	2,851	
16	2,849	
17	2,853	
18	2,849	
19	2,851	
20	2,854	
21	2,850	
22	2,850	
23	2,854	
24	2,852	
25	2,850	
26	2,855	
27	2,848	
28	2,843	
29	2,867	
30	2,855	
31	2,847	
32	2,865	
33	2,850	
34	2,852	
35	2,847	
36	2,853	
37	2,851	
38	2,850	
39	2,858	
40	2,843	
41	2,861	
42	2,845	
43	2,851	
44	2,853	
45	2,854	
46	2,852	
47	2,856	
48	2,847	
49	2,855	
50	2,852	
Average	2,85	
Cmk	3,53	

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 6 mm^2

Nominal Cr. Height:	3,15	NA	mm
+/-	0,05	NA	mm

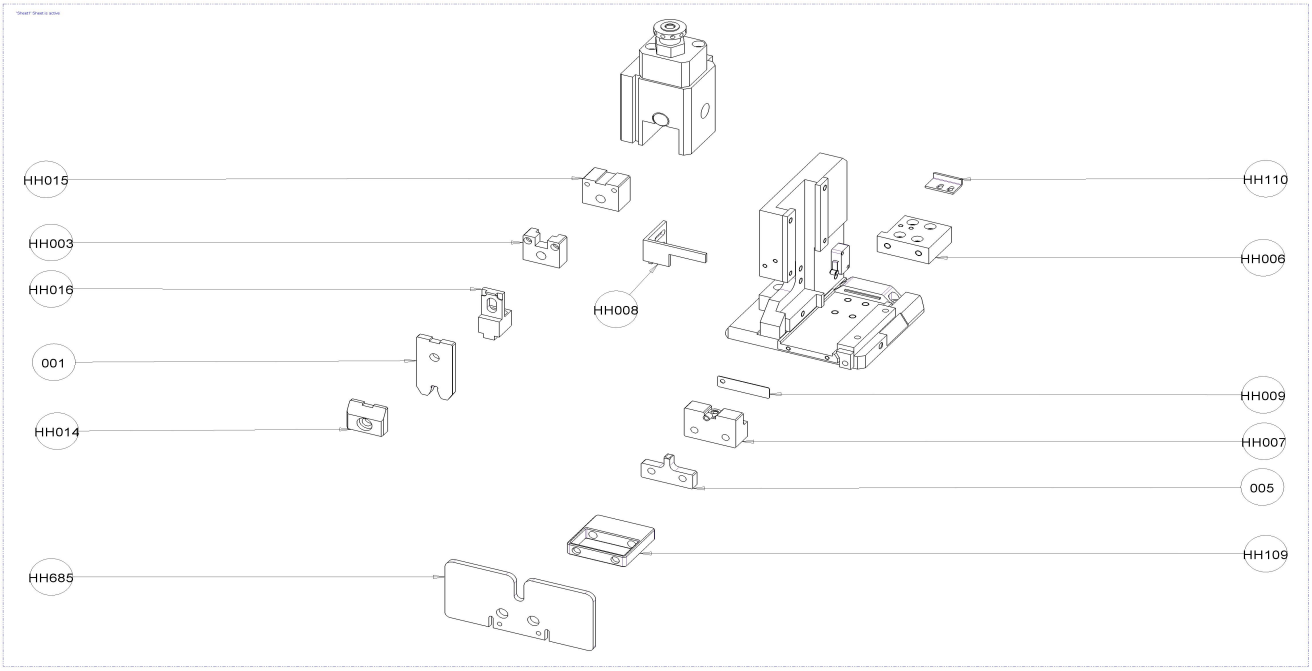
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	3,148	
2	3,154	
3	3,145	
4	3,155	
5	3,146	
6	3,152	
7	3,152	
8	3,139	
9	3,137	
10	3,137	
11	3,154	
12	3,154	
13	3,150	
14	3,148	
15	3,152	
16	3,149	
17	3,150	
18	3,154	
19	3,147	
20	3,149	
21	3,150	
22	3,154	
23	3,149	
24	3,153	
25	3,152	
26	3,154	
27	3,160	
28	3,153	
29	3,152	
30	3,152	
31	3,156	
32	3,159	
33	3,162	
34	3,149	
35	3,158	
36	3,156	
37	3,156	
38	3,152	
39	3,152	
40	3,149	
41	3,147	
42	3,150	
43	3,153	
44	3,153	
45	3,151	
46	3,149	
47	3,154	
48	3,151	
49	3,152	
50	3,154	
Average	3,15	
Cmk	3,32	

Acceptance criteria: Cmk>= 2

END

APP 90 SINGLE CONSUMABLE PART LIST

A1700479	**7009-2401**



NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7009-2401 DW***	WIRE CRIMPER	1
005W	***7009-2401 DAN***	WIRE ANVIL	1
HH003	HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7009-2401 HH007	TERMINAL HOLDER	1
HH008	HH008-3	STRIPPER	1
HH009	HH009	TERMINAL GUIDE	1
HH014	HH014	CRIMPER HOLDER	1
HH015	HH015	SPACER B	1
HH016	7009-2401 HH016	HOLD DOWN	1
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH685	HH685	SAFETY COVER FC143685	1