APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700480

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70092400 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7009-2400-02	*	**90 HAND FEED**	**YSD-XVK81**	*







Anvil		
7009-2400DAN		(N)
CW (c)	8,50	*CW (i)*





Wire Crimper		
7009-2400DW		(N)
CW	8,50	

Insulation Crimper	
CW	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

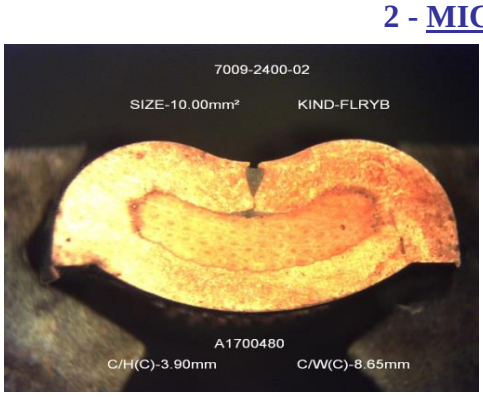
	The two sides of the insulation grips are in the correct position.	NA
	Not found any Bell Mouth in the insulation area.	NA
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	NA
	The wire barrel is free from major burrs.	O

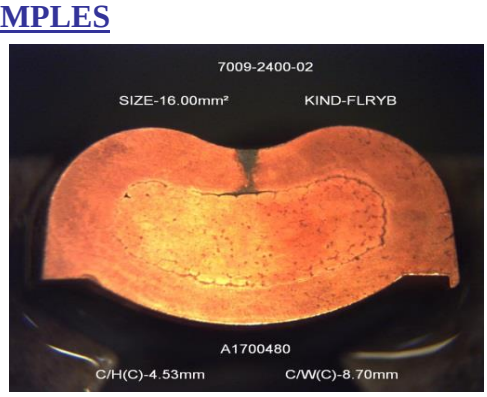
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	3,9	3,90	2,80
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	4,55	4,55	2,99
	+/-0.05		

REMARKS:

Aplicable wire range 10.00mm² ~ 16.00mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18597
		Rui Domingues
Date: 2017-nov-23	Date: 2017-nov-21	Date: 2017-nov-20

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A1700480

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 10 mm^2

Nominal Cr. Height:	3,9	NA	mm
+/-	0,05	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	3,899	
2	3,904	
3	3,901	
4	3,887	
5	3,887	
6	3,898	
7	3,899	
8	3,889	
9	3,905	
10	3,904	
11	3,898	
12	3,903	
13	3,899	
14	3,899	
15	3,900	
16	3,894	
17	3,897	
18	3,898	
19	3,901	
20	3,897	
21	3,902	
22	3,902	
23	3,896	
24	3,907	
25	3,899	
26	3,894	
27	3,901	
28	3,881	
29	3,881	
30	3,894	
31	3,901	
32	3,896	
33	3,899	
34	3,895	
35	3,903	
36	3,899	
37	3,900	
38	3,899	
39	3,902	
40	3,902	
41	3,900	
42	3,900	
43	3,905	
44	3,904	
45	3,910	
46	3,903	
47	3,898	
48	3,906	
49	3,899	
50	3,903	
Average	3,90	
Cmk	2,80	

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 16 mm^2

Nominal Cr. Height:	4,55	NA	mm
+/-	0,05	NA	mm

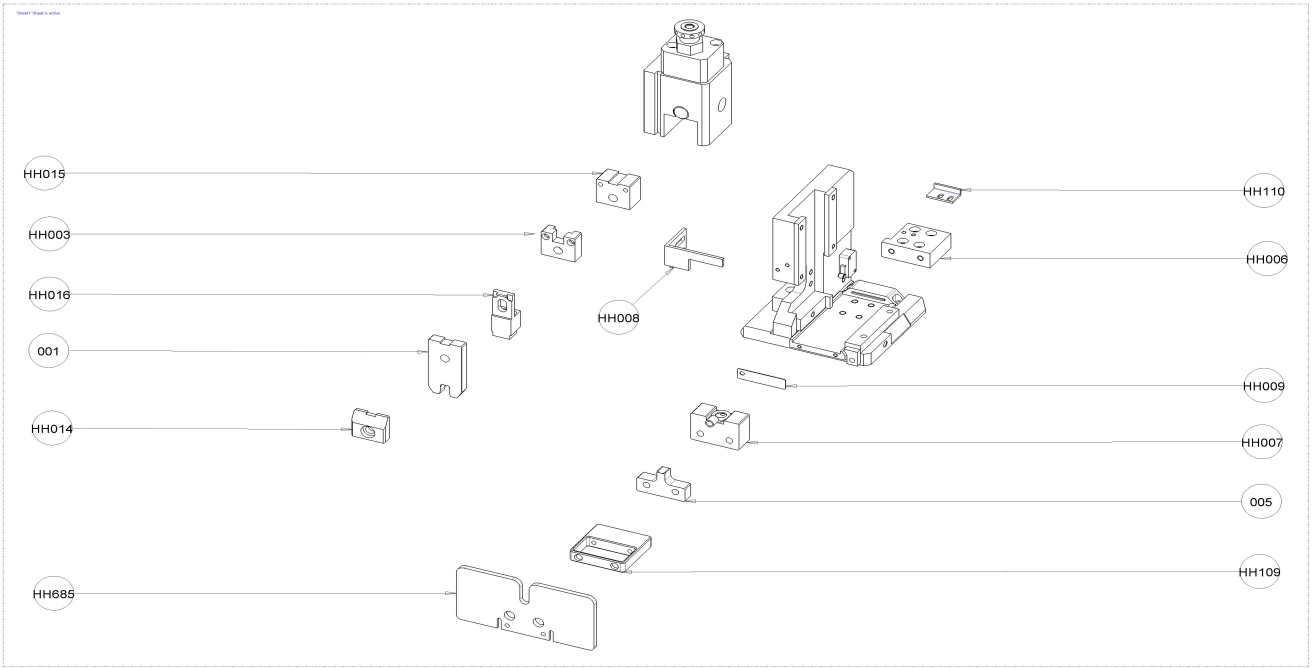
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	4,553	
2	4,553	
3	4,557	
4	4,553	
5	4,558	
6	4,558	
7	4,555	
8	4,562	
9	4,549	
10	4,565	
11	4,556	
12	4,554	
13	4,558	
14	4,554	
15	4,552	
16	4,552	
17	4,552	
18	4,556	
19	4,547	
20	4,544	
21	4,553	
22	4,555	
23	4,544	
24	4,558	
25	4,554	
26	4,561	
27	4,554	
28	4,562	
29	4,566	
30	4,553	
31	4,563	
32	4,565	
33	4,552	
34	4,549	
35	4,551	
36	4,550	
37	4,555	
38	4,552	
39	4,549	
40	4,549	
41	4,552	
42	4,556	
43	4,552	
44	4,545	
45	4,556	
46	4,555	
47	4,555	
48	4,557	
49	4,557	
50	4,559	
Average	4,55	
Cmk	2,99	

Acceptance criteria: Cmk>= 2

END

APP 90 SINGLE CONSUMABLE PART LIST

A1700480	**7009-2400**



NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7009-2400 DW***	WIRE CRIMPER	1
005W	***7009-2400 DAN***	WIRE ANVIL	1
HH003	7009-2400 HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7009-2400 HH007	TERMINAL HOLDER	1
HH008	HH008-3	STRIPPER	1
HH009	HH009	TERMINAL GUIDE	1
HH014	HH014	CRIMPER HOLDER	1
HH015	HH015	SPACER B	1
HH016	7009-2400 HH016	HOLD DOWN	1
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH685	HH685	SAFETY COVER FC143685	1