APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)







Applicator Serial Nº
A1700486




TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70045407 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7004-5407-02	*	**90 HAND FEED**	**YSD-DAIMLER XVK81**	*

Anvil		Wire Crimper		Insulation Crimper	
7004-5407DAN	(N)	7004-5407DW	(N)	NA	
CW (c) 6,35	*CW (i)*	*CW* 6,35		*CW*	

1 - VISUAL CHECK ITEMS

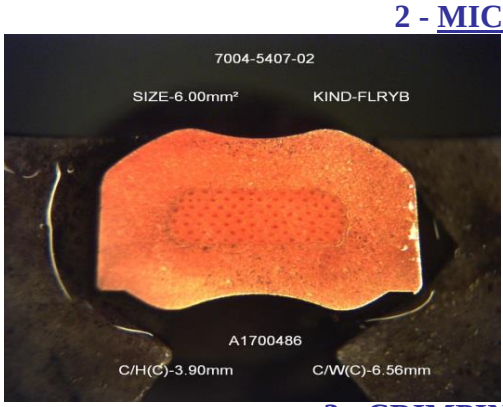
	The two sides of the insulation grips are in the correct position.	**NA**
	Not found any Bell Mouth in the insulation area.	**NA**
	The lance height and shape are not deformed.	**NA**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
1.50～2.50mm	1,76		The Bell Mouth is within the spec.**(*)**	**O**
			The dimension of the cutting carrier is within the spec.**(*)**	**NA**
( )	0,30		Bend up is within the criteria**(*)**	**O**
( )	-----		Bend down is within the criteria**(*)**	**O**
( )	0,30		The terminal is not bent sideway, look-king from the top**(*)**	**O**
( )	0,10		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	3,9	3,90	6,96
	+/-0,1		



	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Applicable Wire Size: 6.00mm² ~ 6.00mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18597
		
Date: 2018-mar-06	Date: 2018-mar-06	Date: 2018-mar-06

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A1700486

LOWER WIRE KIND & SIZE

Wire kind:	FLRYB		
Wire size:	6		mm^2
Nominal Cr. Height:	3,9	NA	mm
+/-	0,1	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	3,903	
2	3,903	
3	3,912	
4	3,895	
5	3,901	
6	3,896	
7	3,900	
8	3,900	
9	3,898	
10	3,902	
11	3,900	
12	3,903	
13	3,902	
14	3,902	
15	3,898	
16	3,902	
17	3,900	
18	3,900	
19	3,905	
20	3,906	
21	3,903	
22	3,901	
23	3,903	
24	3,903	
25	3,901	
26	3,902	
27	3,895	
28	3,910	
29	3,898	
30	3,899	
31	3,900	
32	3,912	
33	3,906	
34	3,907	
35	3,907	
36	3,904	
37	3,910	
38	3,911	
39	3,895	
40	3,910	
41	3,902	
42	3,908	
43	3,894	
44	3,909	
45	3,905	
46	3,910	
47	3,907	
48	3,906	
49	3,905	
50	3,904	
Average	3,90	
Cmk	6,96	

UPPER WIRE KIND & SIZE

Wire kind:	NA	+	NA	
Wire size:	NA	+	NA	mm^2
Nominal Cr. Height:	NA		NA	mm
+/-	NA		NA	mm

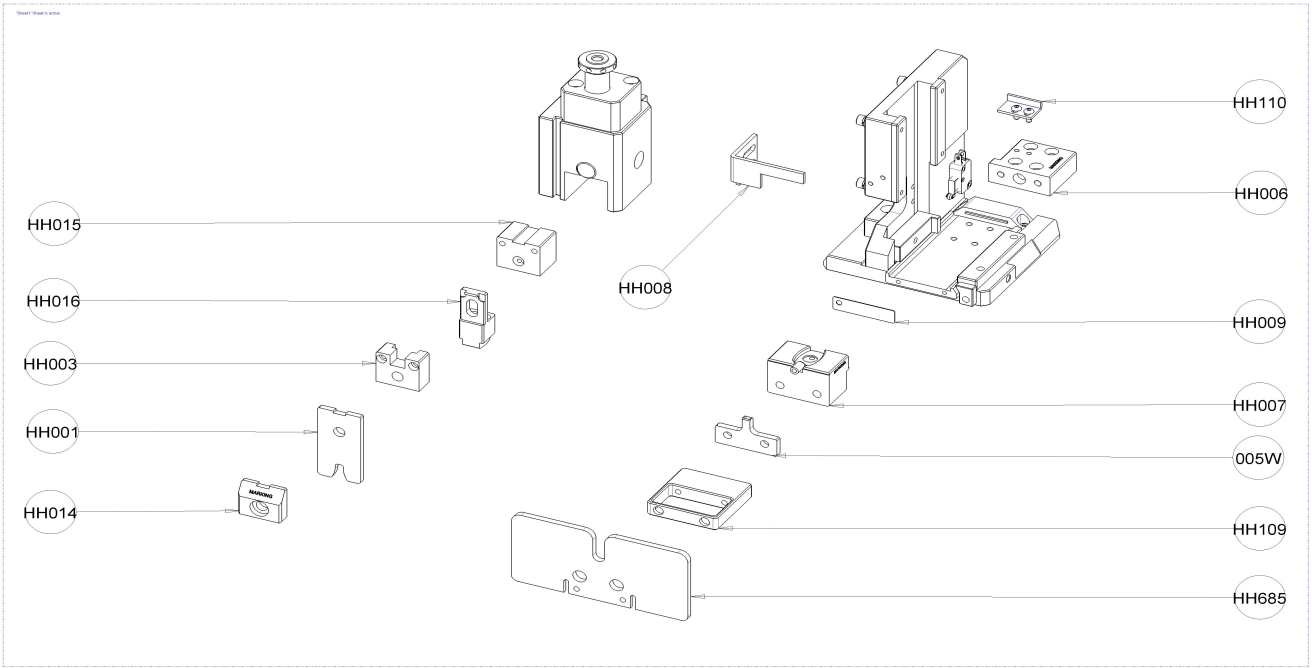
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END

APP 90 SINGLE CONSUMABLE PART LIST

A1700486	**7004-5407**



NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7004-5407DW***	WIRE CRIMPER	1
005W	***7004-5407DAN***	WIRE ANVIL	1
HH003	7004-5407 HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7004-5407 HH007	TERMINAL HOLDER	1
HH008	HH008-3	STRIPPER	1
HH009	HH009	TERMINAL GUIDE	1
HH014	HH014	CRIMPER HOLDER	1
HH015	7004-5407 HH015	SPACER B	1
HH016	7004-5407 HH016	HOLD DOWN	1
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH685	HH685	SAFETY COVER FC143685	1