# APPLICATOR VALIDATION REPORT

**(Spec. YEL-RP-02-0004)**

| Applicator Serial Nº |
|---|
| A1700513 |







***TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70045234 SEQUENCE Nº*** 9





| Terminal Nº | Rubber Seal | Applicator Type | Purchasing Order Nº | Project / Model |
|---|---|---|---|---|
| **7004-5234-02** | * | **90 HAND FEED** | **YSD-3500083973** | * |

| Anvil | | Wire Crimper | | Insulation Crimper | |
|---|---|---|---|---|---|
| 7004-5234DAN | (N) | 7004-5234DW | (N) | NA | |
| *CW (c)* 7,20 | *CW (i)* | *CW* 7,20 | | *CW* | |

## 1 - VISUAL CHECK ITEMS

**O** - ok **X** - ng **NA** - not aplicable

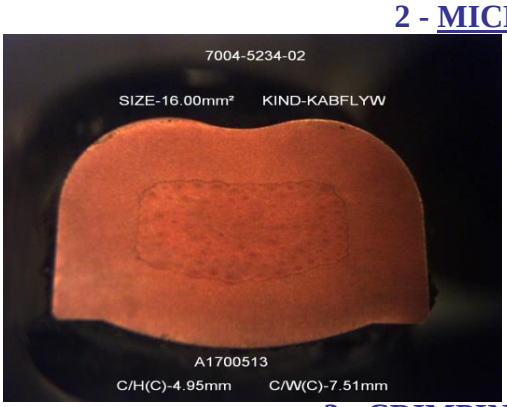
| | | |
|---|---|---|
|  | The two sides of the insulation grips are in the correct position. | **NA** |
|  | Not found any Bell Mouth in the insulation area. | **NA** |
|  | The lance height and shape are not deformed. | **NA** |
|  | Not found any burr in the cutting carrier. | **O** |
|  | Not found any crack in the terminal. | **O** |
|  | The wire barrel is free from major burrs. | **O** |

| | | |
|---|---|---|
|  | The Bell Mouth is within the spec.**(*)** | **O** |
|  | The dimension of the cutting carrier is within the spec.**(*)** | **NA** |
|  | Bend up and Bend down are within the criteria**(*)** | **O** |
|  | The exposed conductor is within the spec.(*) | **NA** |
|  | The terminal is not bent sideway, look-king from the top**(*)** | **O** |
|  | The body of the terminal is not twisted**(*)** | **O** |

**LOWER** WIRE KIND & SIZE

**UPPER** WIRE KIND & SIZE

## 2 - MICRO CUT SAMPLES




## 3 - CRIMPING HEIGHT STABILITY

| | NOMINAL | AVERAGE | Cmk |
|---|---|---|---|
| mm | 4,95 | 4,95 | 8,17 |
| | **+/-0,1** | | |

| | NOMINAL | AVERAGE | Cmk |
|---|---|---|---|
| mm | NA | | |
| | **+/-NA** | | |

**REMARKS:**

Aplicable wire range 16.00mm²

**EVALUATION DECISION**

SUITABLE ☐
NOT SUITABLE ☐
FOR USE IN PRODUCTION

| APPROVED (Section Chief) 3485 | CHECKED (Operator) 44 | PREPARED (Operator) nº 18388 |
|---|---|---|
| | | |
| Date: 2018-jul-30 | Date: 2018-jul-27 | Date: 2018-jul-26 |

**PORTO TECHNICAL CENTRE**

# APPLICATOR VALIDATION REPORT

| Applicator Serial Nº |
|---|
| A1700513 |

## LOWER WIRE KIND & SIZE

Wire kind: KABFLYW

Wire size: 16 mm²

| | | | |
|---|---|---|---|
| Nominal Cr. Height: | 4,95 | NA | mm |
| +/- | 0,1 | NA | mm |

| Sample number | Crimp height **WIRE** (mm) | Crimp height **INSULATION** (mm) |
|---|---|---|
| 1 | 4,952 | |
| 2 | 4,951 | |
| 3 | 4,951 | |
| 4 | 4,954 | |
| 5 | 4,953 | |
| 6 | 4,948 | |
| 7 | 4,954 | |
| 8 | 4,951 | |
| 9 | 4,955 | |
| 10 | 4,952 | |
| 11 | 4,957 | |
| 12 | 4,957 | |
| 13 | 4,946 | |
| 14 | 4,951 | |
| 15 | 4,957 | |
| 16 | 4,957 | |
| 17 | 4,948 | |
| 18 | 4,962 | |
| 19 | 4,949 | |
| 20 | 4,950 | |
| 21 | 4,953 | |
| 22 | 4,942 | |
| 23 | 4,949 | |
| 24 | 4,950 | |
| 25 | 4,950 | |
| 26 | 4,951 | |
| 27 | 4,953 | |
| 28 | 4,951 | |
| 29 | 4,955 | |
| 30 | 4,954 | |
| 31 | 4,954 | |
| 32 | 4,956 | |
| 33 | 4,952 | |
| 34 | 4,954 | |
| 35 | 4,955 | |
| 36 | 4,951 | |
| 37 | 4,955 | |
| 38 | 4,956 | |
| 39 | 4,956 | |
| 40 | 4,958 | |
| 41 | 4,957 | |
| 42 | 4,951 | |
| 43 | 4,956 | |
| 44 | 4,958 | |
| 45 | 4,951 | |
| 46 | 4,952 | |
| 47 | 4,949 | |
| 48 | 4,953 | |
| 49 | 4,961 | |
| 50 | 4,963 | |
| Average | 4,95 | |
| Cmk | 8,17 | |

## UPPER WIRE KIND & SIZE

Wire kind: NA + NA

Wire size: NA + NA mm²

| | | | |
|---|---|---|---|
| Nominal Cr. Height: | NA | NA | mm |
| +/- | NA | NA | mm |

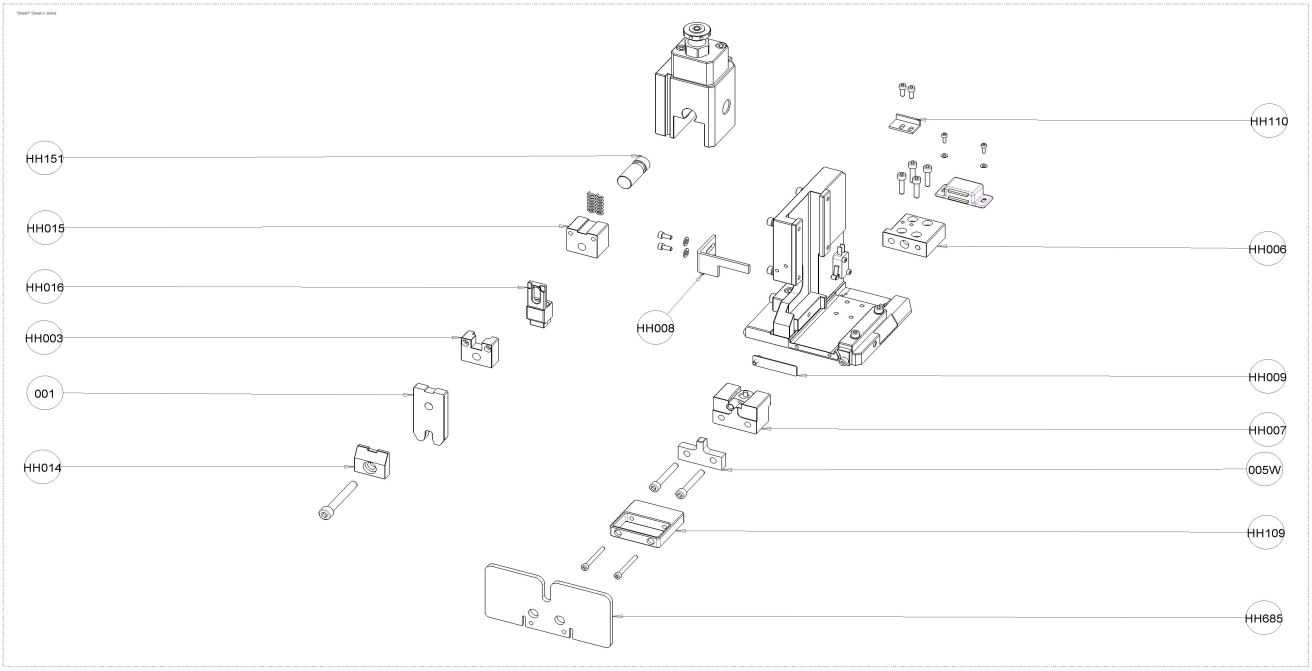
| Sample number | Crimp height **WIRE** (mm) | Crimp height **INSULATION** (mm) |
|---|---|---|
| 1 | | |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |
| 6 | | |
| 7 | | |
| 8 | | |
| 9 | | |
| 10 | | |
| 11 | | |
| 12 | | |
| 13 | | |
| 14 | | |
| 15 | | |
| 16 | | |
| 17 | | |
| 18 | | |
| 19 | | |
| 20 | | |
| 21 | | |
| 22 | | |
| 23 | | |
| 24 | | |
| 25 | | |
| 26 | | |
| 27 | | |
| 28 | | |
| 29 | | |
| 30 | | |
| 31 | | |
| 32 | | |
| 33 | | |
| 34 | | |
| 35 | | |
| 36 | | |
| 37 | | |
| 38 | | |
| 39 | | |
| 40 | | |
| 41 | | |
| 42 | | |
| 43 | | |
| 44 | | |
| 45 | | |
| 46 | | |
| 47 | | |
| 48 | | |
| 49 | | |
| 50 | | |
| Average | | |
| Cmk | | |

**Acceptance criteria: Cmk>= 2,0**

**END**

# APP 90 SINGLE CONSUMABLE PART LIST

| A1700513 | **7004-5234** |
|---|---|




| NUMBER | PARTS NUMBER | PARTS NAME | QUANTITY |
|---|---|---|---|
| 001 | ***7004-5234DW*** | WIRE CRIMPER | 1 |
| 005W | ***7004-5234DAN*** | WIRE ANVIL | 1 |
| HH003 | 7004-5234 HH003 | SPACER A | 1 |
| HH006 | HH006 | ANVIL SUPPORTER | 1 |
| HH007 | 7004-5234 HH007 | TERMINAL HOLDER | 1 |
| HH008 | HH008-3 | STRIPPER | 1 |
| HH009 | 7004-5234 HH009 | TERMINAL GUIDE | 1 |
| HH014 | HH014 | CRIMPER HOLDER | 1 |
| HH015 | 7004-5234 HH015 | SPACER B | 1 |
| HH016 | 7004-5234 HH016 | HOLD DOWN | 1 |
| HH109 | HH109 | LEVER | 1 |
| HH110 | HH110 | SWITCH LEVER | 1 |
| HH151 | HH151 | INSULATION ADJUSTER DIAL | 1 |
| HH685 | HH685 | SAFETY COVER FC143685 | 1 |