APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700545

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72961363 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7296-1363-06	*	**90 HAND FEED**	**YSD-3500072088**	*







Anvil		
7296-1363DA		(N)
CW (c)	5,61	*CW (i)*





Wire Crimper		
7296-1363DW		(N)
CW	5,59	

Insulation Crimper		
NA		()
CW		

1 - VISUAL CHECK ITEMS

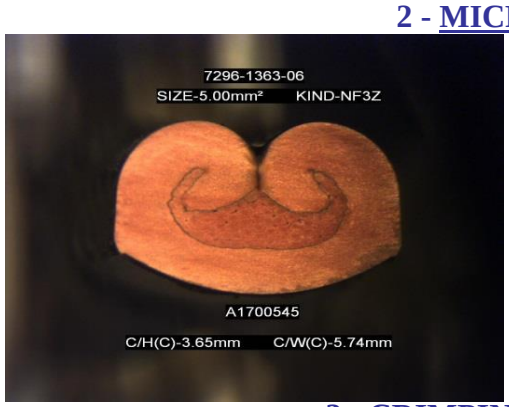
O - ok **X** - ng **NA** - not aplicable

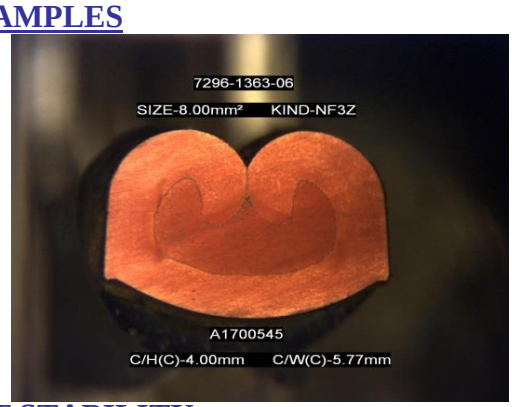
	The two sides of the insulation grips are in the correct position.	**NA**
	Not found any Bell Mouth in the insulation area.	**NA**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**NA**
	Bend up and Bend down are within the criteria**(*)**	**O**
	The exposed conductor is within the spec.(*)	**O**
	The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	3,65	3,65	5,42
	+/-0,1		

	NOMINAL	AVERAGE	Cmk
mm	4	4,01	4,97
	+/-0,1		

REMARKS:

Aplicable wire range 5.00mm²~8.00mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
Date: 2018-dez-12	Date: 2018-dez-07	Date: 2018-dez-07

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A1700545

LOWER WIRE KIND & SIZE

Wire kind: NF3Z

Wire size: 5 mm²

Nominal Cr. Height: 3,65 NA mm

+/- 0,1 NA mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	3,652	
2	3,655	
3	3,656	
4	3,652	
5	3,651	
6	3,654	
7	3,657	
8	3,651	
9	3,654	
10	3,652	
11	3,647	
12	3,655	
13	3,658	
14	3,661	
15	3,638	
16	3,648	
17	3,647	
18	3,634	
19	3,643	
20	3,661	
21	3,653	
22	3,653	
23	3,659	
24	3,652	
25	3,663	
26	3,664	
27	3,656	
28	3,656	
29	3,659	
30	3,656	
31	3,657	
32	3,658	
33	3,656	
34	3,659	
35	3,657	
36	3,655	
37	3,657	
38	3,654	
39	3,660	
40	3,662	
41	3,648	
42	3,647	
43	3,650	
44	3,647	
45	3,646	
46	3,652	
47	3,650	
48	3,652	
49	3,650	
50	3,651	
Average	3,65	
Cmk	5,42	

UPPER WIRE KIND & SIZE

Wire kind: NF3Z

Wire size: 8 mm²

Nominal Cr. Height: 4 NA mm

+/- 0,1 NA mm

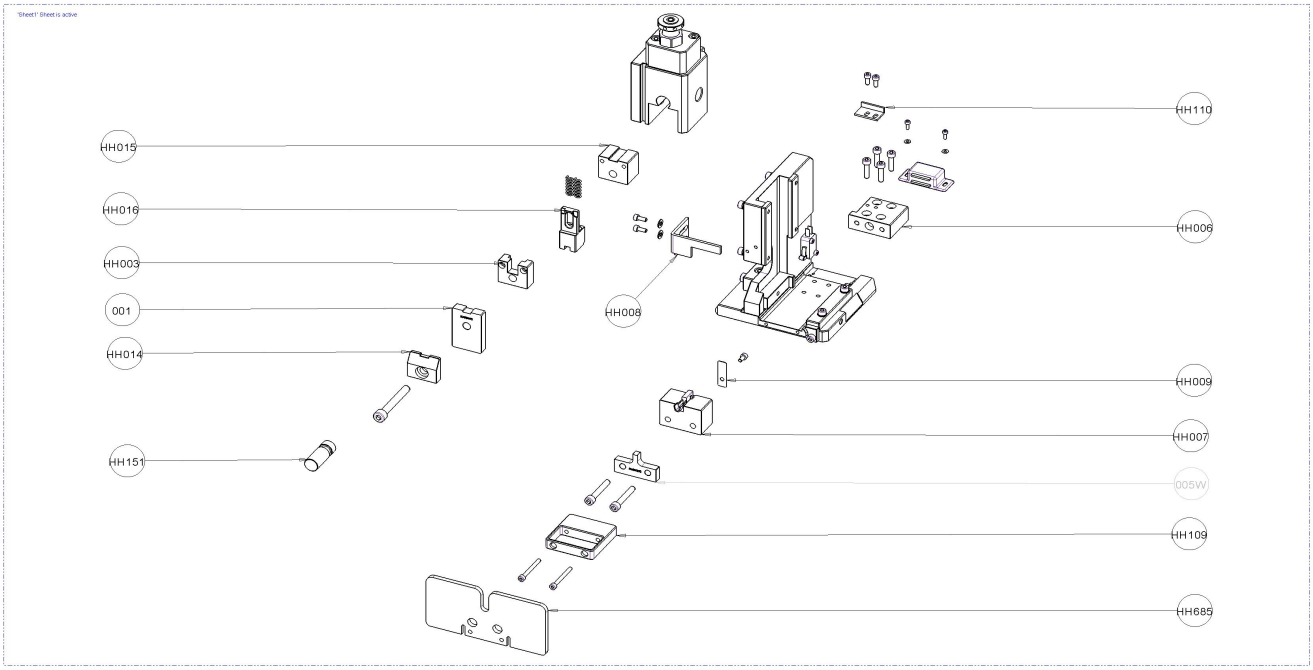
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	4,002	
2	4,000	
3	3,998	
4	4,009	
5	4,009	
6	4,005	
7	4,005	
8	4,011	
9	4,006	
10	4,008	
11	4,010	
12	4,009	
13	4,008	
14	4,012	
15	4,008	
16	4,012	
17	4,008	
18	4,016	
19	4,005	
20	4,010	
21	4,007	
22	4,013	
23	4,019	
24	4,015	
25	4,015	
26	4,026	
27	4,014	
28	4,019	
29	4,022	
30	3,997	
31	4,004	
32	4,002	
33	3,998	
34	4,002	
35	4,002	
36	4,006	
37	4,007	
38	4,007	
39	4,004	
40	4,007	
41	4,008	
42	4,001	
43	4,001	
44	4,002	
45	4,006	
46	4,002	
47	4,005	
48	4,005	
49	4,004	
50	4,000	
Average	4,01	
Cmk	4,97	

Acceptance criteria: Cmk>= 2,0

END

APP 90 SINGLE CONSUMABLE PART LIST

A1700545	**7296-1363**



NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7296-1363DW***	WIRE CRIMPER	1
005W	***7296-1363DA***	WIRE ANVIL	1
HH003	7296-1363 HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7296-1363 HH007	TERMINAL HOLDER	1
HH008	HH008-3	STRIPPER	1
HH009	7296-1363 HH009	TERMINAL GUIDE	1
HH014	HH014	CRIMPER HOLDER	1
HH015	7296-1363 HH015	SPACER B	1
HH016	7296-1363 HH016	HOLD DOWN	1
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH151		INSULATION ADJUSTER DIAL	1
HH685	HH685	SAFETY COVER FC143685	1