APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700546

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72961317 SEQUENCE Nº 9







Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7296-1317-06	*	**90 HAND FEED**	**YSD-3500072088**	*

Anvil		
7296-1317DA		(N)
CW (c) 7,13	*CW (i)*	





Wire Crimper		
7296-1317DW		(N)
CW 7,11		

Insulation Crimper	
NA	
CW	

1 - VISUAL CHECK ITEMS

	The two sides of the insulation grips are in the correct position.	**NA**
	Not found any Bell Mouth in the insulation area.	**NA**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**NA**
	Not found any crack in the terminal.	**NA**
	The wire barrel is free from major burrs.	**O**

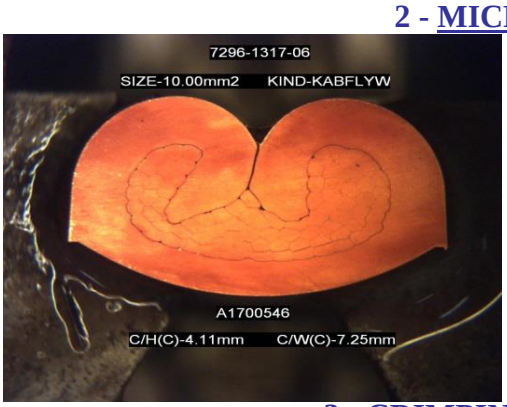
O - ok **X** - ng **NA** - not aplicable

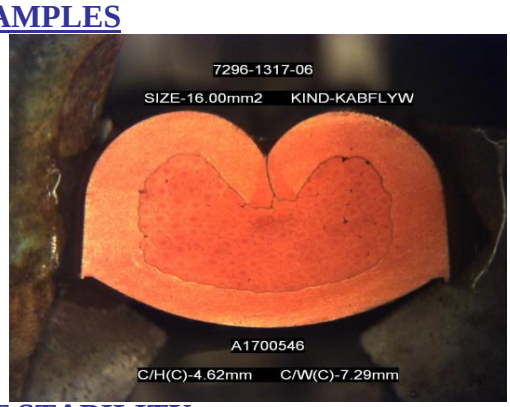
	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**NA**
	Bend up and Bend down are within the criteria**(*)**	**O**
	The exposed conductor is within the spec.(*)	**O**
	The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	4,1	4,10	7,99
	+/-0,1		



	NOMINAL	AVERAGE	Cmk
mm	4,6	4,61	8,22
	+/-0,1		

REMARKS:

Aplicable wire range-10.00~16.00mm^2

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
		
Date: 2018-dez-12	Date: 2018-dez-11	Date: 2018-dez-11

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A1700546

LOWER WIRE KIND & SIZE

Wire kind: KABFLYW

Wire size: 10 mm²

Nominal Cr. Height: 4,1 NA mm

+/- 0,1 NA mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	4,100	
2	4,096	
3	4,101	
4	4,103	
5	4,100	
6	4,098	
7	4,100	
8	4,103	
9	4,096	
10	4,098	
11	4,104	
12	4,108	
13	4,110	
14	4,105	
15	4,102	
16	4,106	
17	4,109	
18	4,105	
19	4,100	
20	4,103	
21	4,107	
22	4,110	
23	4,107	
24	4,104	
25	4,104	
26	4,108	
27	4,105	
28	4,102	
29	4,104	
30	4,105	
31	4,110	
32	4,106	
33	4,102	
34	4,104	
35	4,108	
36	4,111	
37	4,107	
38	4,104	
39	4,104	
40	4,108	
41	4,112	
42	4,106	
43	4,109	
44	4,104	
45	4,110	
46	4,112	
47	4,106	
48	4,104	
49	4,107	
50	4,110	
Average	4,10	
Cmk	7,99	

UPPER WIRE KIND & SIZE

Wire kind: KABFLYW

Wire size: 16 mm²

Nominal Cr. Height: 4,6 NA mm

+/- 0,1 NA mm

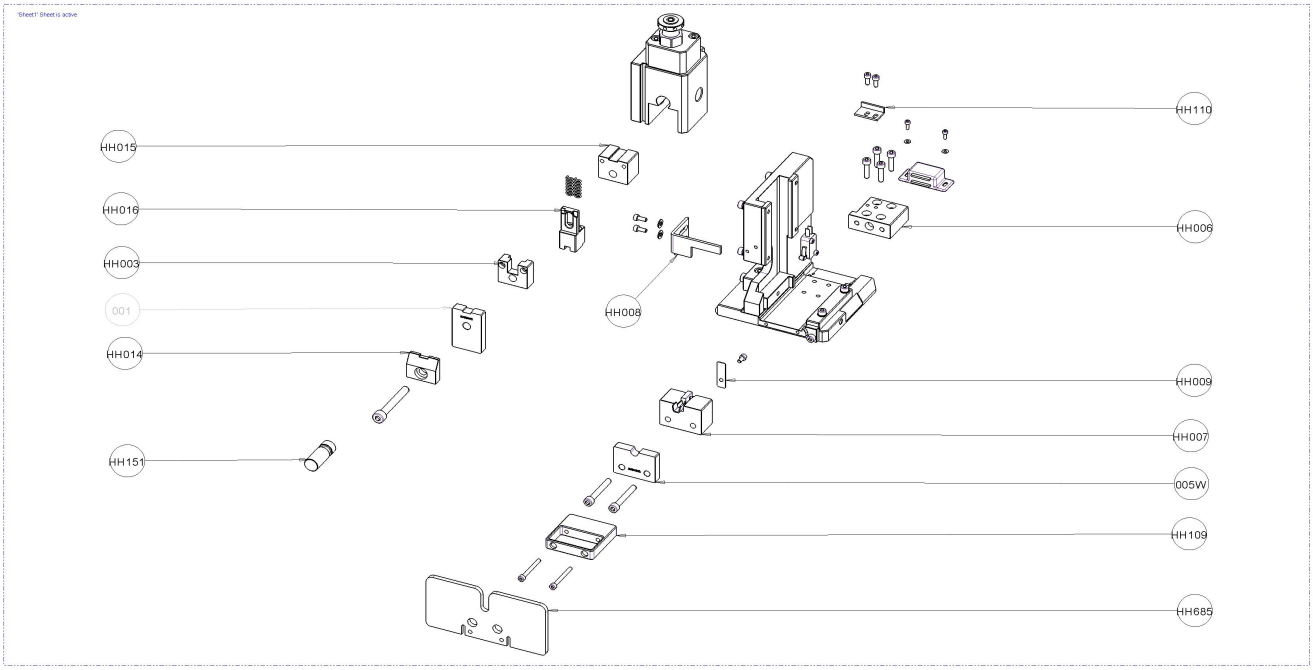
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	4,614	
2	4,609	
3	4,613	
4	4,616	
5	4,611	
6	4,604	
7	4,609	
8	4,613	
9	4,616	
10	4,614	
11	4,611	
12	4,609	
13	4,609	
14	4,605	
15	4,605	
16	4,611	
17	4,604	
18	4,605	
19	4,610	
20	4,605	
21	4,608	
22	4,607	
23	4,605	
24	4,612	
25	4,612	
26	4,609	
27	4,602	
28	4,603	
29	4,607	
30	4,613	
31	4,611	
32	4,608	
33	4,605	
34	4,608	
35	4,612	
36	4,602	
37	4,603	
38	4,607	
39	4,612	
40	4,610	
41	4,606	
42	4,608	
43	4,610	
44	4,612	
45	4,608	
46	4,611	
47	4,614	
48	4,609	
49	4,603	
50	4,606	
Average	4,61	
Cmk	8,22	

Acceptance criteria: Cmk>= 2,0

END

APP 90 SINGLE CONSUMABLE PART LIST

A1700546	**7296-1317**



NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7296-1317DW***	WIRE CRIMPER	1
005W	***7296-1317DA***	WIRE ANVIL	1
HH003	7296-1317 HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7296-1317 HH007	TERMINAL HOLDER	1
HH008	HH008-3	STRIPPER	1
HH009	7296-1317 HH009	TERMINAL GUIDE	1
HH014	HH014	CRIMPER HOLDER	1
HH015	7296-1317 HH015	SPACER B	1
HH016	7296-1317 HH016	HOLD DOWN	1
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH151		INSULATION ADJUSTER DIAL	1
HH685	HH685	SAFETY COVER FC143685	1