QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

CLIENT	MODEL		S/N	MAP
YAZAKI SALTANO DE OVAR, P.E. LDA	RSYP3852-JG		L 54255	
	Cod. KIT	K K010714		
ORDER	TERMINALE TO BE CRIMPED			A#
5001873	7113-1297			

APPLICATOR SETUP


SETUP L.D.P. (mm.)=	190,00	STROKE	35 (mm)		MECAL	S.C.	S.T.M.	Note
Load Cal. (Kg.) =	850			Specification		X		
				Terminal Samples		X		
		Setup	Fixing. Ref.▼	Wire Samples		X		
POSITIVE CAM (Terminal present)		X	C	Housing Samples				
NEGATIVE CAM (Terminal absent)			A	Seal Samples		X		7158-3496
			Fixing. Ref.▲	Applicounter			No	
				Mobile Ejector			No	
				Carrier strip to be cut			No	
				Conform to Mecal norms			No	
				Automatic machine				

FEEDING POINT OF THE TERMINAL				
Hole	Slot	Wire wing	Insulation wing	Other
X				

	Crimp Height	Pull Force	Section	Photo
C			2,50	X
M				
K				
			1,00	X

Setup on		
	Mod.	S/N
Press	P107C	42877
Stripper		

Strip lenght = (mm)



CRIMPING


WIRE	INSULATION	BARREL
 F	 C	
Profile dimension	Profile dimension	Profile dimension
Wire C. Profile Width (mm.) 3,10 (toll. +) 0,02	Insulation C. Profile Width (mm.) 6,80 (toll. +) 0,02	Barrel C. Profile Width (mm.) (toll. +)

WIRE CHARACTERISTICS


CRIMPING DIMENSIONS (mm.)

SECTION	COMPOSITION		Insulation	CONDUCTOR				INSULATION				BARREL			Pull Force	Crimp Force
					HEIGHT ±	Required WIDTH ±	Measured WIDTH		HEIGHT ±	Required WIDTH ±	Measured WIDTH	HEIGHT ±	Required WIDTH ±	Measured WIDTH		
mm²	Nb	Ø	Ø	Index Wire	0,05			Index Insulation	0,10						Min. (N.)	C.F.A. (KN.)
2,386 Sez. reale																
2,50	19	0,40	2,80	1,99	2,18		3,19	2,00	7,00		6,89				280	7,27
FLRYA																
0,932 Sez. reale																
1,00	19	0,25	1,90	2,41	1,80		3,16	1,80	6,70		6,75				180	8,68
FLRYA																

CHECK



Description		Rif.	Test
Bent left or right (max)	3°	A	OK
Bent up or down (max)	3°	B	OK
Torsion (max)	3°	C	OK



Description		Rif.	Test
Bellmouth	(0.2-0.5)	D	OK
Cut-off (max)	0.5	E	OK
Wire overlay(min.)	0.5	F	OK


DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
29/6/2011	*Sanlorenzo*	*Bruno*	*Zatti*

N.B.: MECAL affirms that the MECAL tool is in accordance with the above mentioned characteristics

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

YAZAKI SALTANO DE OVAR, P.E. LDA | **WIRE** | **RSYP3852-JG** | **54255**

	Terminal
	7113-1297
Wire Section.	2,50
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

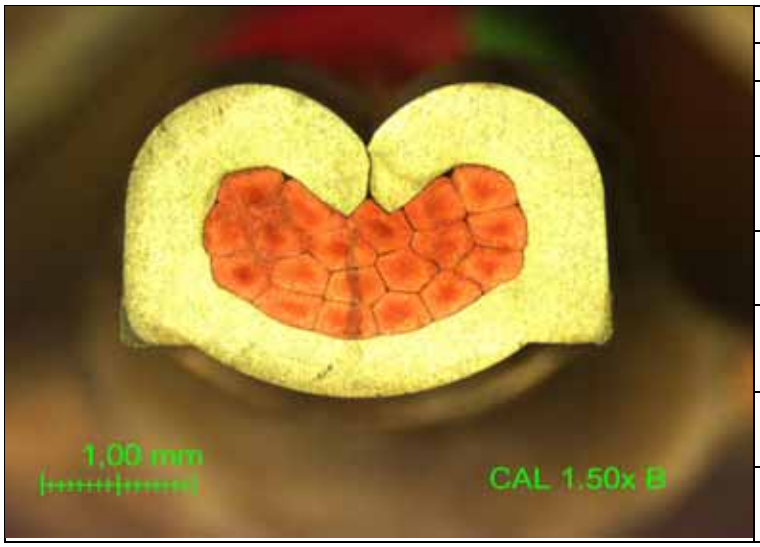

	Terminal
	7113-1297
Wire Section.	2,50
CH. (mm.)	2,18
C.W. (mm.)	3,19
Material Compression (%)	19,7
Wire Compression	
Terminal Compression	


	Terminal
	7113-1297
Wire Section.	2,50
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
29/6/2011	*Sanlorenzo*	*Bruno*	*Zatti*

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

YAZAKI SALTANO DE OVAR, P.E. LDA | **WIRE** | **RSYP3852-JG** | **54255**

	Terminal
	7113-1297
Wire Section.	1,00
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

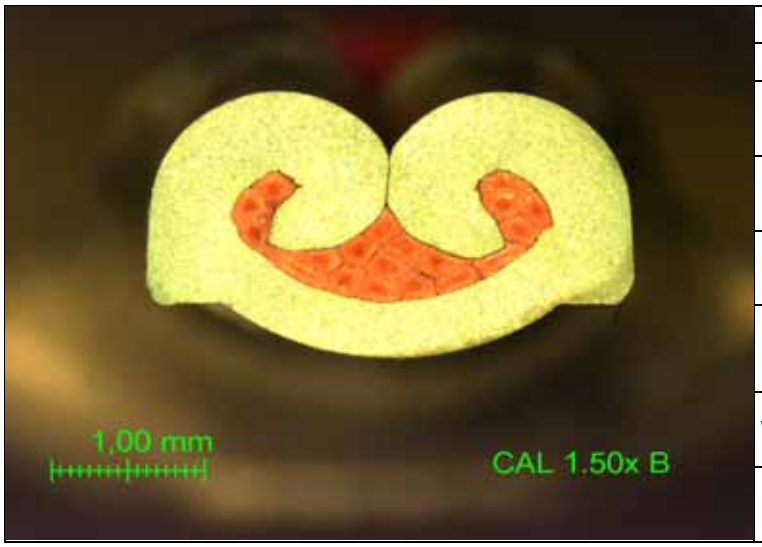

	Terminal
	7113-1297
Wire Section.	1,00
CH. (mm.)	1,80
C.W. (mm.)	3,16
Material Compression (%)	20,4
Wire Compression	
Terminal Compression	

	Terminal
	7113-1297
Wire Section.	1,00
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
29/6/2011	*Sanlorenzo*	*Bruno*	*Zatti*

MECAL	DISTINTA COMPONENTI - PARTS LIST - BESTANDTEILELIST

DATA 29/06/2011

MODELLO
MODEL **RSYP3852-JG**
TYPE
MODELE

TERMINALE
TERMINAL **7113-1297**
KONTAKT
COSSE

MATRICOLA
SERIAL NU **L 54255**
REGISTRIERNUMMER
MATRICULE

CODICE	Qt.	Rif
870550004	1	110
601051006	1	130
600052010	1	150
911190000	1	160
911070012	1	170
840010014	1	180
600030016	3	190
790400003	1	200
790340005	1	210
790420004	1	220
790340003	5	230
790340002	1	235
791640006	1	242
P0119	0,5	245
911110013	1	260
991130001	1	265
991320003	1	280
870620001	1	295
880480008	1	300
871980007	1	310
990400003	1	315
600061016	2	360
601058012	1	370
600050010	1	380
640060020	2	390
991290010	1	400
991290016	1	405
600050014	4	410
610110308	1	420
600041008	1	450
650242004	2	460
991350000	1	480
659233093	1	500
659232118	1	510
659230121	1	520
791190002	1	530
791210002	1	540
600050012	2	560
620081030	1	570
600052010	1	580
911090007	1	590
991160033	2	670
600050020	1	680
610101005	1	690

CODICE	Qt.	Rif
95127 0207	1	001
60006 0040	1	005
91112 0035	1	100
99101 0039	1	120
95127 0046	1	140
99132 0007	1	240
99128 0008	1	250
91103 0043	1	290
91117 0053	1	320
91118 0184	1	330
60005 0012	1	339
99017 0019	1	343
60005 2010	1	344
91125 0087	1	350
88146 0018	1	355
88146 0019	1	362
60004 0008	4	365
91106 0018	1	430
91105 0018	1	440
99017 0000	1	470
62008 5230	1	490
99131 0001	1	550
91108 0050	1	600
91011 0000	2	610
91124 0440	1	620
91119 0003	1	621
99126 0028	1	622
91116 0025	1	623
91122 0000	1	630
60003 0008	2	640
91148 0377	1	650
60004 1016	2	660
91148 0384	2	655
63010 0104	2	665
Personal. L_G128-Y	**1**	
98146 0766	**1**	**1000**
98145 0724	**1**	**1010**
99141 0300	1	1019
99141 0130	1	1020
99951 0410	1	1030
91130 0342	1	1040
60008 1025	1	1055
98127 0951	**1**	**1060**
60004 0010	1	1062
91134 0177	**1**	**1070**
91133 0202	**1**	**1075**
91035 0002	1	1080
20108 0061	1	1082
60003 0008	1	1085
60004 0016	4	1090
60003 0006	1	1093
91145 0025	1	1095
91141 0329	1	1096
60004 0010	1	1097
62104 0010	1	1098