QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

CLIENT **YAZAKI SALTANO DE OVAR, P.E. LDA**	**MODEL** **RSY3282-JA1** **Cod. KIT** **K** **K014451**	**S/N** **L 78936**	**MAP**
ORDER **5011990**	**TERMINAL TO BE CRIMPED** **7116-4156-02**		**A#**

APPLICATOR SETUP

SETUP L.D.P. (mm.)=	**190,00**	**STROKE**	**35**	
Load Cal. (Kg.) =	**850**		**(mm)**	
		Setup		**Fixing. Ref.▼**
POSITIVE CAM (Terminal present)		**X**		**C**
NEGATIVE CAM (Terminal absent)				**B**
				Fixing. Ref.▲

	MECAL	**S.C.**	**S.T.M.**	**Note**
Specification		**X**		
Terminal Samples		**X**		
Wire Samples		**X**		
Housing Samples				
Seal Samples				
Applicounter			**No**	
Mobile Ejector			**No**	
Carrier strip to be cut			**No**	
Conform to Mecal norms			**Yes**	
Automatic machine				

FEEDING POINT OF THE TERMINAL

Hole	Slot	Wire wing	Insulation wing	Other
X				

	Crimp Height	**Pull Force**	**Section**	**Photo**
C				
M				
K			1,50	X

Setup on

	Mod.	**S/N**
Press	**P107C**	42877
Stripper		

Strip length = **4,5+0,5** **(mm)**



CRIMPING

WIRE		**INSULATION**		**BARREL**	
	**F**		**S**		
Profile dimension **Wire C. Profile Width** **(mm.)** **2,5**	**(toll. +)** **0,02**	**Profile dimension** **Insulation C. Profile Width** **(mm.)** **3,6**	**(toll. +)** **0,02**	**Profile dimension** **Barrel C. Profile Width** **(mm.)**	**(toll. +)**

WIRE CHARACTERISTICS

CRIMPING DIMENSIONS **(mm.)**

SECTION	COMPOSITION		Insulation		CONDUCTOR				INSULATION			BARREL			**Pull Force**	**Crimp Force**
					Required HEIGHT ±	Required WIDTH ±	Measured WIDTH		Required HEIGHT ±	Required WIDTH ±	Measured WIDTH	Required HEIGHT ±	Required WIDTH ±	Measured WIDTH		
mm²	Nb	Ø	Ø	Index Wire	0,05	0,10		Index Insulation	0,10	0,10					Toll. ± 2 % (N.)	C.F.A. (KN.)
2,39 **Sez. reale** **2,50** **FLRYA**	**19**	**0,40**	**2,80**	**2,05**	**1,85**	**2,55**	**2,59**	**1,48**	**3,20**	**3,60**	**3,69**				**400**	**5,24**
1,34 **Sez. reale** **1,50** **FLRYA**	**19**	**0,30**	**2,20**	**2,36**	**1,55**	**2,55**	**2,58**	**1,52**	**2,75**	**3,60**	**3,62**				**250**	**5,50**

CHECK



Description		**Rif.**	**Test**
Bent left or right (max)	**3°**	**A**	**OK**
Bent up or down (max)	**3°**	**B**	**OK**
Torsion (max)	**3°**	**C**	**OK**



Description		**Rif.**	**Test**
Bellmouth	**(0.1-0.4)**	**D**	**OK**
Cut-off (max)	**0.4**	**E**	**OK**
Wire overlay(min.)	**0.7**	**F**	**OK**

DATE	**OPERATOR SIGNATURE**	**CONTROLLER SIGNATURE**	**QUALITY RESPONSIBLE**
21/6/2016	***Amarotto***	***Bruno***	***Zatti***

N.B.: MECAL affirms that the MECAL tool is in accordance with the above mentioned characteristics

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

YAZAKI SALTANO DE OVAR, P.E. LDA **WIRE** **RSY3282-JA1** **78936**

Terminal	
7116-4156-02	
Wire Section.	**1,50**
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

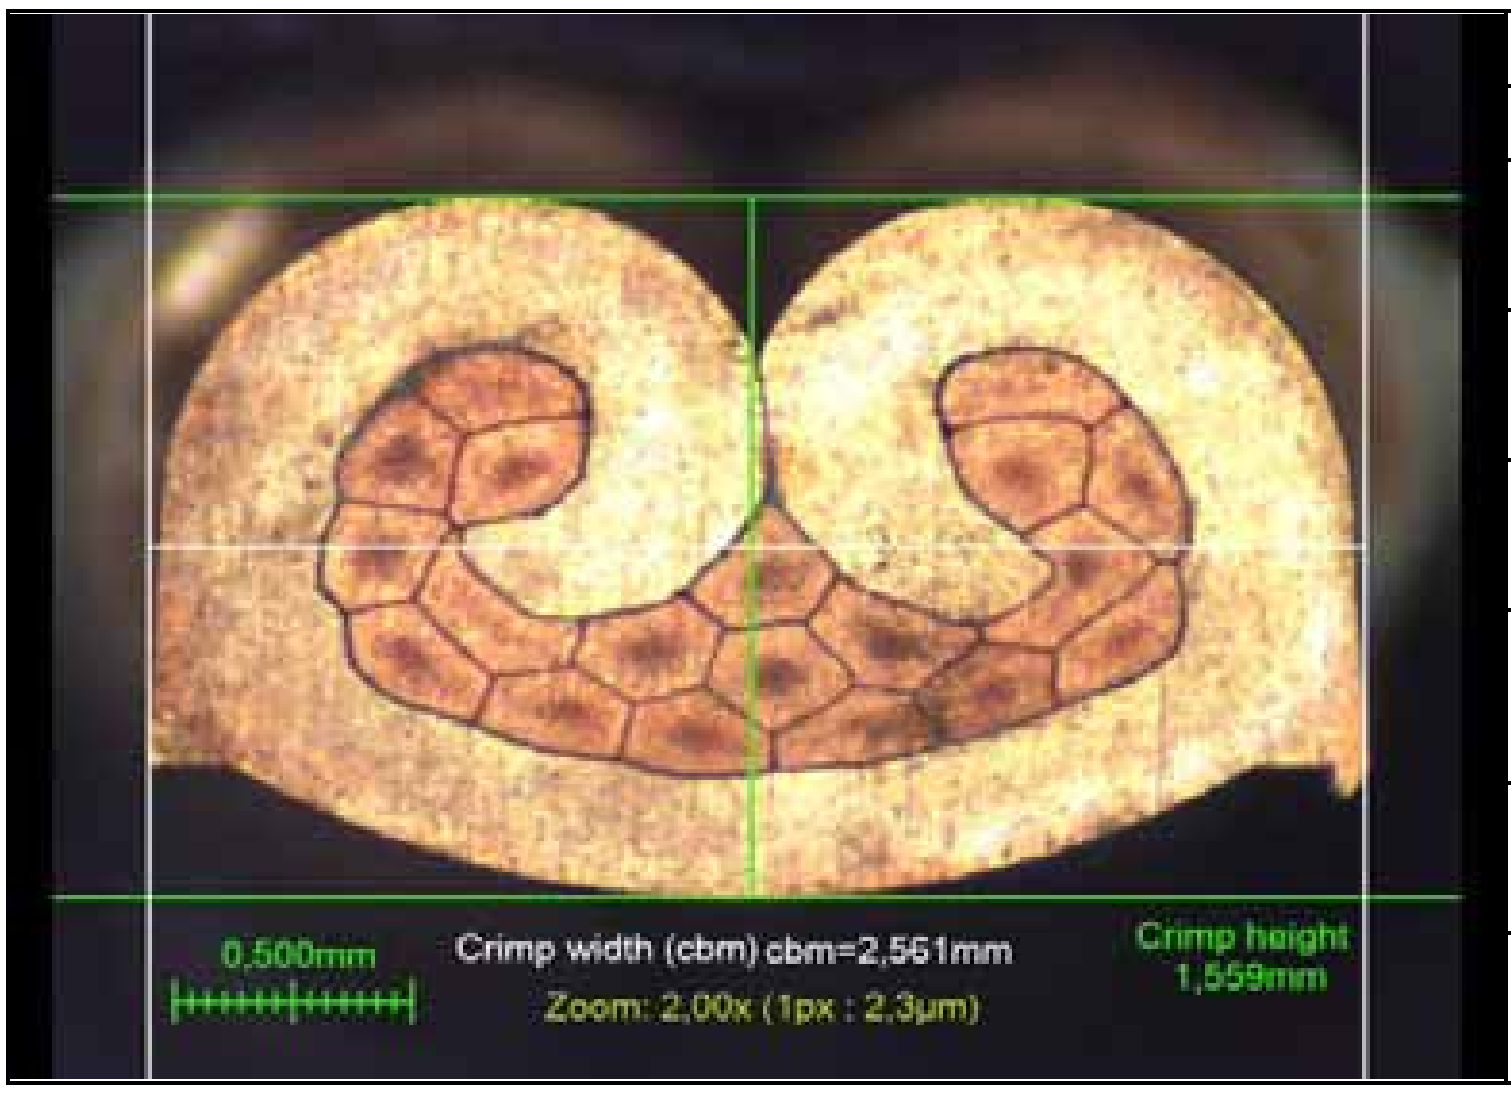
0,500mm
Crimp width (cbm) cbm=2,561mm
Zoom: 2,00x (1px : 2,3µm)
Crimp height
1,559mm

Terminal	
7116-4156-02	
Wire Section.	**1,50**
CH. (mm.)	**1,55**
C.W. (mm.)	**2,58**
Material Compression (%)	**18,3**
Wire Compression	
Terminal Compression	

Terminal	
7116-4156-02	
Wire Section.	**1,50**
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
21/6/2016	*Amarotto*	*Bruno*	*Zatti*

MECAL

DISTINTA COMPONENTI - PARTS LIST - BESTANDTEILELIST

DATA 21/06/2016

MODELLO
MODEL **RSY3282-JA1**
TYPE
MODELE

TERMINALE
TERMINAL **7116-4156-02**
KONTAKT
COSSE

MATRICOLA
SERIAL NU **L 78936**
REGISTRIERNUMMER
MATRICULE

CODICE	Qt.	Rif	CODICE	Qt.	Rif
870550004	1	110	95127 0207	1	001
601051006	2	130	60006 0040	1	005
600052010	1	150	91112 0035	1	100
911190000	1	160	99101 0038	1	120
911070012	1	170	99101 0039	1	120
650231018	1	180	95127 0047	1	140
630104106	1	190	91103 0045	1	290
990270004	1	200	91117 0053	1	320
991320002	1	210	91118 0184	1	330
600041106	1	220	60005 0012	1	339
991280007	1	230	60005 0035	1	340
991320001	1	240	99017 0019	1	343
610111308	1	250	60005 2010	1	344
911110013	1	260	91125 0074	1	350
991300008	1	280	88146 0018	1	355
870620001	1	295	88146 0019	1	362
880480008	1	300	60004 0008	4	365
871980007	1	310	91106 0008	1	430
990400003	1	315	91105 0018	1	440
600061016	2	360	99017 0000	1	470
601058012	1	370	91102 0001	1	550
600050010	1	380	91108 0050	1	600
640060020	2	390	91011 0000	2	610
991290010	1	400	91124 0234	1	620
991290016	1	405	60004 0012	1	621
600050014	4	410	99126 0028	1	622
640050020	1	420	91116 0027	1	623
600041006	1	450	91122 0000	1	630
650242004	2	460	60003 0006	2	640
991350000	1	480	91148 0364	1	650
600050016	2	490	91148 0383	2	655
600050016	1	500	63010 4104	2	665
991590000	1	510	60004 1012	2	660
911010006	1	520	Personal. **L_H06-Y**		
991340002	1	530	**98146 0473**	**1**	**1000**
991330003	1	540	**98145 0436**	**1**	**1010**
991310000	1	560	99951 0350	1	1030
640050020	1	570	91130 0292	1	1040
600052010	1	580	60008 1025	1	1055
911090007	1	590	60004 0010	1	1058
			98127 0596	**1**	**1060**
			91134 0177	**1**	**1070**
			91133 0108	**1**	**1075**
			91035 0002	1	1080
			20108 0061	1	1082
			60003 0008	1	1085
			60004 0016	2	1090
			60003 0006	1	1093
			91145 0025	1	1095
			91141 0329	1	1096
			60004 0010	1	1097
			62104 0010	1	1098
			60004 0016	2	1100
			91143 0039	1	1105
			64002 0008	1	1110
			91042 0000	1	1115
			91145 0000	1	1120
			91146 0000	1	1125
			60004 0016	1	1130

REV	DATE	DESCRIPTION	REQUIRED	FITMENT