QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

CLIENT	MODEL		S/N	MAP
YAZAKI SALTANO DE OVAR P.E. LDA	RSYP2842-JGD_M		L 81797	
	Cod. KIT	K K021451		
ORDER	TERMINAL TO BE CRIMPED			A#
4514029807	7115-1636-02			

APPLICATOR SETUP


SETUP L.D.P. (mm.)=	190,00	STROKE	35 (mm)		MECAL	S.C.	S.T.M.	Note
Load Cal. (Kg.) =	850			Specification		X		
		Setup	Fixing. Ref.▼	Terminal Samples		X		
POSITIVE CAM (Terminal present)		X	C	Wire Samples		X		
NEGATIVE CAM (Terminal absent)			B	Housing Samples				
			Fixing. Ref.▲	Seal Samples		X		7157-3033-70
				Applicounter			No	
				Mobile Ejector			No	
FEEDING POINT OF THE TERMINAL				Carrier strip to be cut			Yes	

Hole	Slot	Wire wing	Insulation wing	Other	Automatic machine
	X				

	Crimp Height	Pull Force	Section	Photo
C				
M			3,00	X
K				

Setup on	Mod.	S/N
Press	P107C	42877
Stripper		

Strip length = (mm)



CRIMPING

WIRE	INSULATION	BARREL
 F	 C	
Profile dimension Wire C. Profile Width (mm.) 2,9 (toll. +) 0,02	Profile dimension Insulation C. Profile Width (mm.) 5,9 (toll. +) 0,02	Profile dimension Barrel C. Profile Width (mm.) (toll. +)

WIRE CHARACTERISTICS


CRIMPING DIMENSIONS (mm.)

SECTION	COMPOSITION		Insulation	CONDUCTOR				INSULATION				BARREL			Pull Force	Crimp Force
					Required HEIGHT ±	Required WIDTH ±	Measured WIDTH		Required HEIGHT ±	Required WIDTH ±	Measured WIDTH	Required HEIGHT ±	Required WIDTH ±	Measured WIDTH		
mm²	Nb	Ø	Ø	Index Wire	0,05	0,10		Index Insulation	0,10	0,15					Toll. ± 2 % (N.)	C.F.A. (KN.)
4,00				1,70	2,15	2,95	3,01	0,85	6,70	6,35	6,34				550	6,68
3,00				1,86	2,00	2,95	2,99	0,70	6,70	6,35	6,34				500	6,91

CHECK



Description		Rif.	Test
Bent left or right (max)	3°	A	OK
Bent up or down (max)	3°	B	OK
Torsion (max)	3°	C	OK



Description		Rif.	Test
Bellmouth	(0.3-0.8)	D	OK
Cut-off (max)	0.4	E	OK
Wire overlay(min.)	0.5~1.50	F	OK


DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
26/1/2024	*Valinotto*	*P.Bruno*	*Zatti*

N.B.: MECAL affirms that the MECAL tool is in accordance with the above mentioned characteristics.

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

YAZAKI SALTANO DE OVAR P.E. LDA | **WIRE** | **RSYP2842-JGD_M** | **81797**

	Terminal
	7115-1636-02
Wire Section.	3,00
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

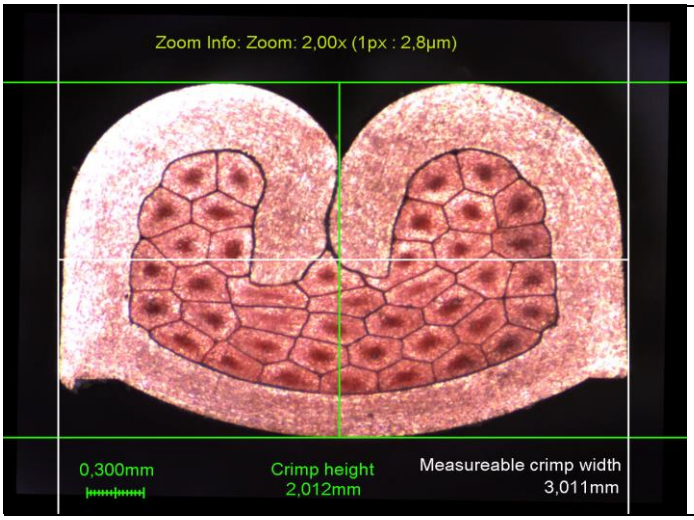

	Terminal
	7115-1636-02
Wire Section.	3,00
CH. (mm.)	2,00
C.W. (mm.)	2,99
Material Compression (%)	32,0
Wire Compression	
Terminal Compression	

	Terminal
	7115-1636-02
Wire Section.	3,00
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
26/1/2024	*Valinotto*	*P.Bruno*	*Zatti*

MECAL	DISTINTA COMPONENTI - PARTS LIST - BESTANDTEILELIST

DATA 26/01/2024

MODELLO
MODEL RSYP2842-JGD_M
TYPE
MODELE

TERMINALE
TERMINAL 7115-1636-02
KONTAKT
COSSE

MATRICOLA
SERIAL NU L 81797
REGISTRIERNUMMER
MATRICULE

CODICE	Qt.	Rif
870550004	1	110
601051006	1	130
600052010	1	150
911190000	1	160
911070012	1	170
840010014	1	180
600030016	3	190
790400003	1	200
790340005	1	210
790420004	1	220
790340003	5	230
790340002	1	235
791640006	1	242
P0138	0,5	245
911110013	1	260
991130001	1	265
991320003	1	280
870620001	1	295
880480008	1	300
871980007	1	310
990400003	1	315
600061016	2	360
601058012	1	370
600050010	1	380
640060020	2	390
991290010	1	400
991290016	1	405
600050014	4	410
610110308	1	420
600041006	1	450
650242004	2	460
991350000	1	480
990010015	1	530
600050012	2	560
620081030	1	570
600052010	1	580
911090007	1	590
991160033	2	670
600050020	1	680
610101005	1	690


CODICE	Qt.	Rif
95127 0207	1	001
91112 0035	1	100
99101 0039	1	120
95127 0046	1	140
99132 0007	1	240
99128 0008	1	250
91103 0042	1	290
91117 0007	1	320
91118 0130	1	330
60005 0035	1	340
91125 0074	1	350
88146 0018	1	355
88146 0019	1	362
60004 0006	4	365
91106 0008	1	430
91105 0018	1	440
99017 0000	1	470
62008 5230	1	490
99131 0001	1	550
91108 0050	1	600
91011 0000	2	610
91124 0234	1	620
60004 0012	1	621
99126 0028	1	622
91116 0027	1	623
91122 0008	1	630
60003 0008	2	640
91148 0364	1	650
60004 1012	2	660
91148 0382	1	655
91148 0384	1	656
63010 4104	2	665
Personal. **L_0067-Y**		
98146 4649	**1**	**1000**
98145 4109	**1**	**1010**
99951 0560	1	1030
91130 0295	1	1040
60008 1025	1	1055
60004 0010	1	1058
98127 7473	**1**	**1060**
91134 0106	**1**	**1070**
91133 0202	**1**	**1075**
91035 0002	1	1080
20108 0061	1	1082
60003 0008	1	1085
60004 0016	2	1090
91145 0025	1	1095
91141 0329	1	1096
60004 0010	1	1097
62104 0010	1	1098
60004 0016	2	1100
91143 0037	1	1105
64002 0008	1	1110
91042 0000	1	1115
91145 0000	1	1120
91146 0000	1	1125
99150 0450	1	1290
60004 0020	1	1130


REV	DATE	DESCRIPTION	REQUIRED	FITMENT
01	10/01/2024	RSYP2280-JC_A	YAZAKI	
01	10/01/2024	RSYP2842-JGD_M	YAZAKI	


Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069


L_BLK00-RYP


ATTENZIONE: la protezione in gomma (rif. 295) tra le ghiere ed il corpo del miniapplicatore deve essere rimossa prima dell' utilizzo dell' attrezzo.
ATTENTION: the rubber protection (ref. 295) between the ram and the applicator it must be removed before using.

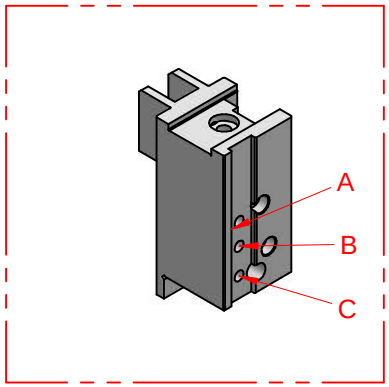













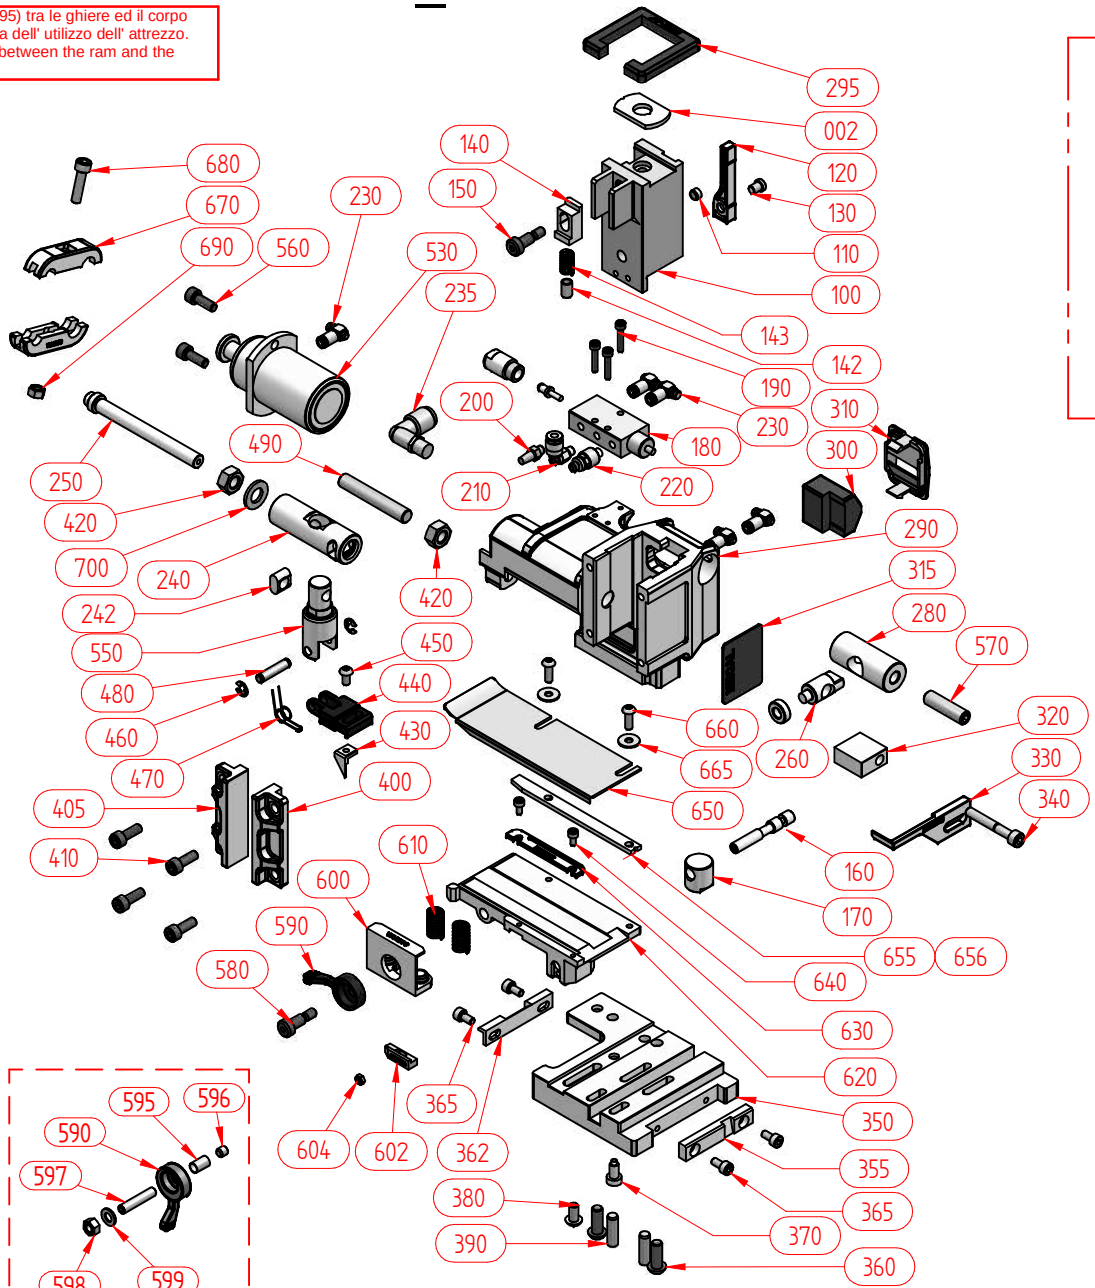

001 GHIERA TIPO "J" "COMBI"

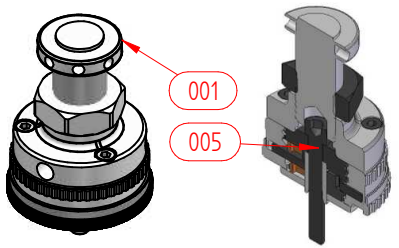


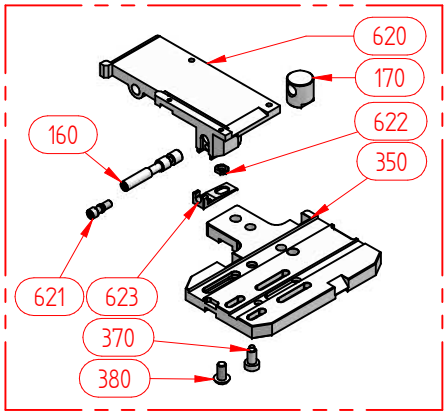

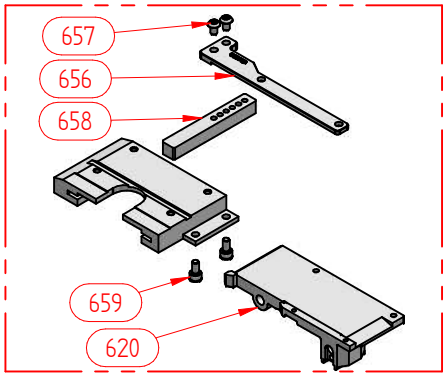

Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069

L_0067-Y

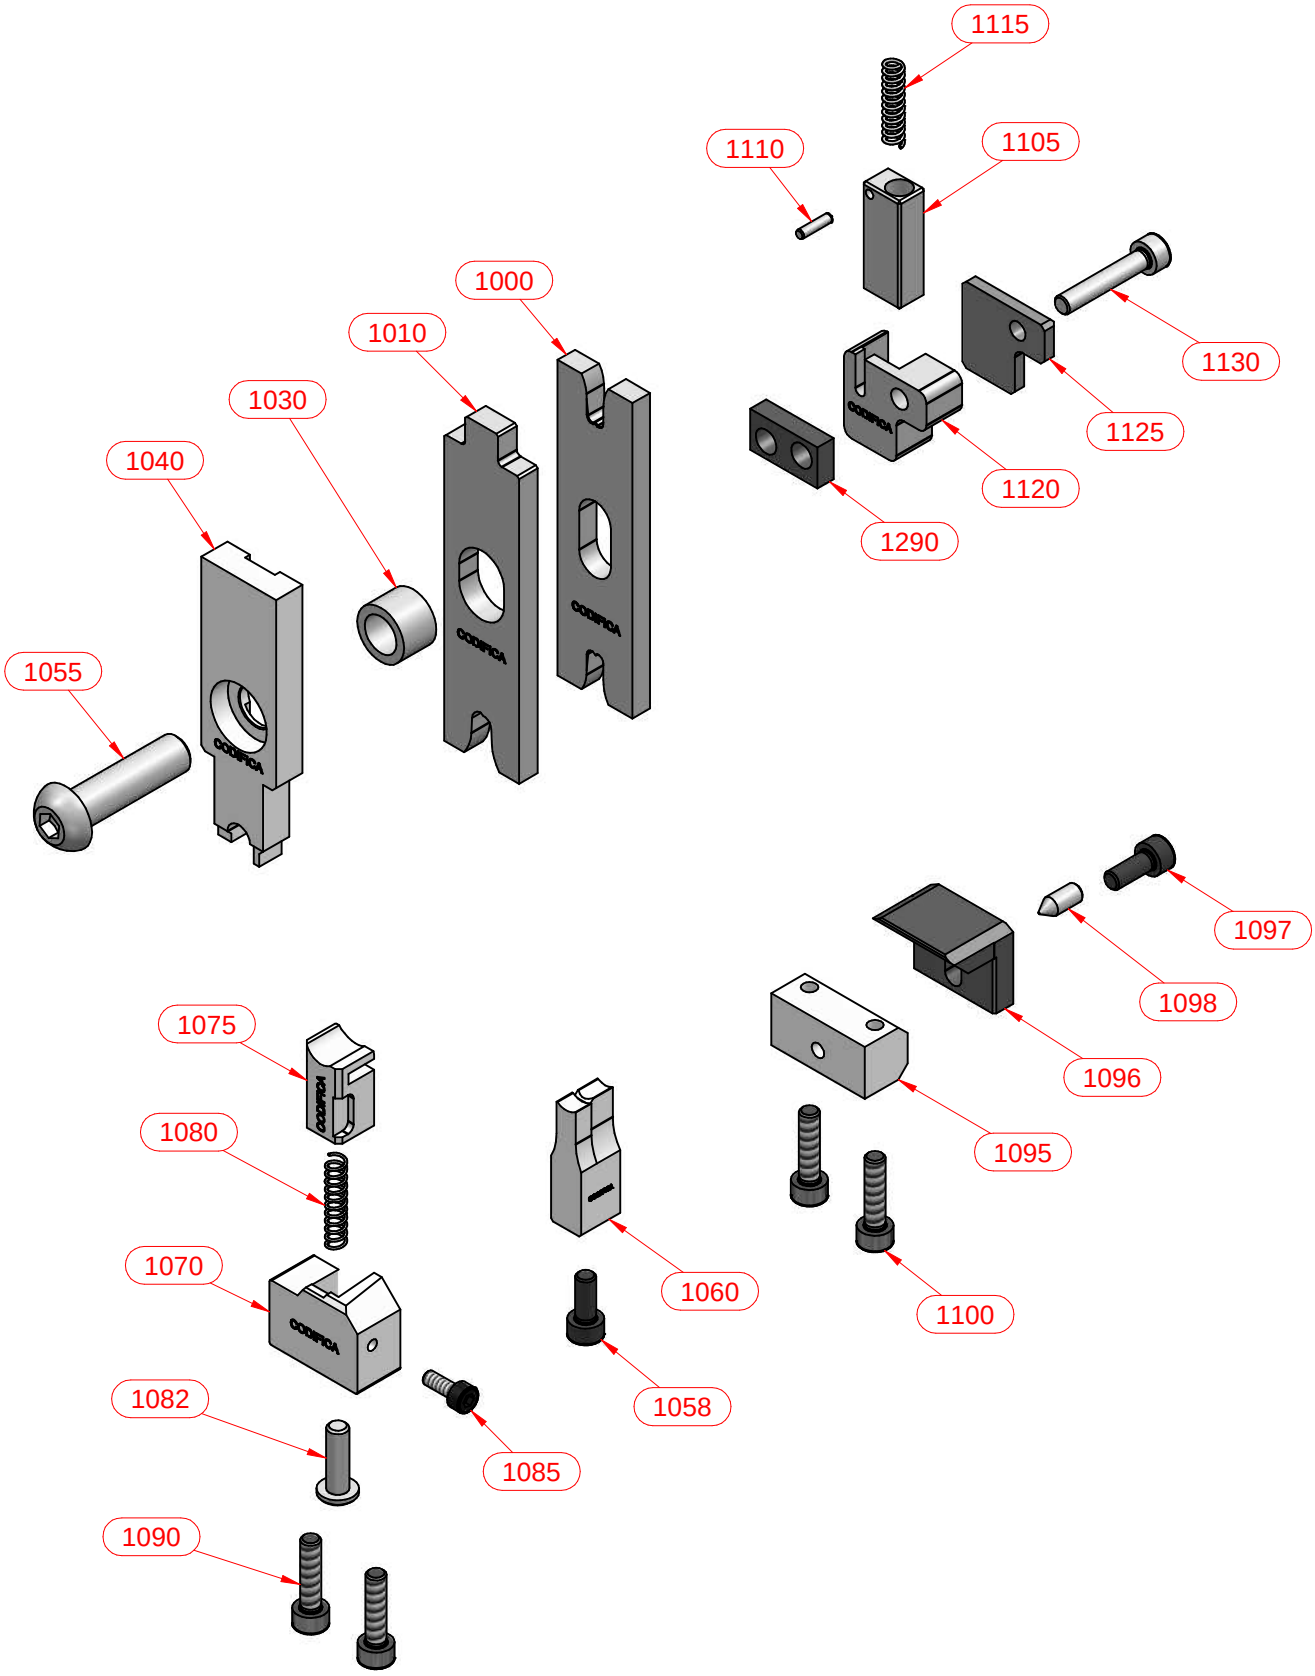

Dichiarazione di incorporazione
Declaration of incorporation

(All. IIB Dir. 2006/42/CE)

Il fabbricante
The manufacturer

Mecal s.r.l. Strada per Felizzano, 18
15043 Fubine (AL) Italia

dichiara
declares

(seguendo la procedura di valutazione della conformità secondo Art.13 Dir. 2006/42/CE)

che la quasi macchina
the partly completed machinery

Miniapplicatore - Stampo Mod. RSYP2842-JGD_M Matr. L81797 anno 2024

Applicatore e stampo per l'aggraffatura di terminali metallici su cavi conduttori

Applica e rispetta i requisiti essenziali di sicurezza
1.1.1 – 1.1.3 –1.3.4 della direttiva 2006/42/CE all I
e la documentazione tecnica pertinente è stata compilata in conformità allegato VIIB

It applies and fulfill the essential safety requirements 1.1.1 - 1.1.3 - 1.3.4 - of Directive 2006/42/CE annex 1 and the related technical documentation has been compiled in accordance with part B of annex VII

Ci impegniamo a trasmettere, in risposta da una richiesta adeguatamente motivata delle autorità nazionali, informazioni pertinenti su miniapplicatori / stampi (quasi macchine) in formato digitalizzato

Si dichiara il divieto della messa in servizio di tutti gli applicatori e stampi MECAL definiti "quasi macchine" prima che le macchine sulle quali vengono incorporate siano state dichiarate conformi alle disposizioni della direttiva 2006/42/CE

It is expressely prohibited to put in use all MECAL applicator - defined "partly completed machines" before that the machines hosting the mentioned Mecal applicators are confirmed in compliance with Directive 2006/42/CE

e autorizza
and authorizes

Claudio Aluffo - Str. Per Felizzano,18, 15043 Fubine (AL) Italia

a costituire il fascicolo tecnico
to compile the technical file

luogo e data 26/01/2024
place and date

Fubine

Mecal s.r.l.
Claudio Aluffo

