PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
L94346

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7115-1636 * SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7115-1636-02	**7157-3033-70**	**RSYP2842-JGD_M**	**YSD-3500327883**	*

Applicable Terminals for this Tool:

7115-1636-02							

Anvil			Wire Crimper			Insulation Crimper		
7115-1636KADM		(N)	7115-1636KWM		(N)	7115-1636KIDM		(1)
CW (c)	2,92	*CW (i)* 5,90	*CW*	2,90		*CW*	5,90	


1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
	The two sides of the insulation grips are in the correct position.	O	0~0.40mm 0.30~0.80mm	0.23 0.69		The Bell Mouth is within the spec.(*)	O
	Not found any Bell Mouth in the insulation area.	O	0~0.40mm	0.37		The dimension of the cutting carrier is within the spec.(*)	O
	The lance height and shape are not deformed.	O	2º 2º	0.1		Bend up and Bend down are within the criteria(*)	O
	Not found any burr in the cutting carrier.	O	0.50~1.50mm	0.85		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	5º	0.9		The terminal is not bent sideway, look-king from the top(*)	O
	The wire barrel is free from major burrs.	O	5º	0.5		The body of the terminal is not twisted(*)	O

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES

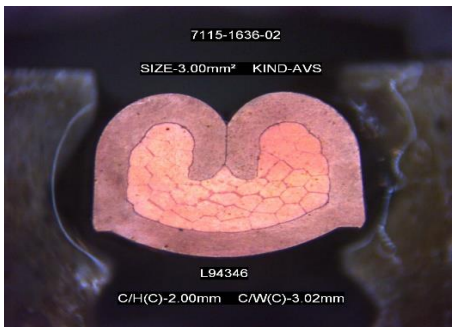

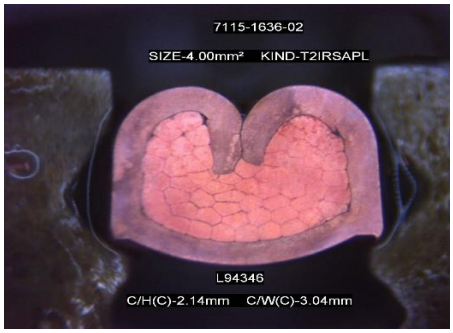

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk		NOMINAL	AVERAGE	Cmk
mm	2	2,01	2,05	mm	2,15	2,15	2,20
	+/-0.05				+/-0.05		

REMARKS:

Aplicable wire range >2.50mm²~4.00mm².
Wire size 3.00mm² C/W(I)-6.28mm
Wire size 4.00mm² C/W(I)-6.34mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2024/fev/22	Date: 2024/fev/17	Date: 2024/fev/09

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
L94346

LOWER WIRE KIND & SIZE

Wire kind: AVS

Wire size: 3 mm^2

Nominal Cr. Height:	2	6,7	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,015	6,763
2	2,020	6,752
3	2,016	6,760
4	2,009	6,766
5	2,011	6,753
6	2,017	6,754
7	2,004	6,765
8	2,019	6,751
9	2,011	6,759
10	2,008	6,766
11	2,004	6,755
12	2,017	6,747
13	2,002	6,761
14	2,015	6,746
15	2,006	6,755
16	2,001	6,763
17	2,003	6,764
18	2,002	6,751
19	2,011	6,755
20	2,010	6,763
21	2,005	6,750
22	2,013	6,758
23	2,000	6,751
24	2,004	6,764
25	2,014	6,750
26	2,002	6,764
27	2,002	6,771
28	2,013	6,753
29	2,020	6,764
30	2,002	6,758
31	2,015	6,752
32	2,006	6,761
33	2,002	6,749
34	2,016	6,744
35	2,002	6,760
36	2,007	6,765
37	2,011	6,751
38	1,999	6,754
39	2,013	6,763
40	2,002	6,761
41	1,998	6,755
42	1,998	6,748
43	2,009	6,753
44	2,007	6,762
45	2,017	6,768
46	2,008	6,763
47	2,019	6,764
48	2,022	6,764
49	2,002	6,759
50	2,013	6,769
Average	2,01	6,76
Cmk	2,05	2,10

UPPER WIRE KIND & SIZE

Wire kind: T2IRSAPL

Wire size: 4 mm^2

Nominal Cr. Height:	2,15	6,7	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,164	6,750
2	2,152	6,748
3	2,159	6,753
4	2,167	6,751
5	2,150	6,756
6	2,148	6,758
7	2,163	6,755
8	2,161	6,750
9	2,155	6,754
10	2,154	6,759
11	2,161	6,752
12	2,148	6,743
13	2,160	6,751
14	2,152	6,755
15	2,150	6,740
16	2,164	6,755
17	2,151	6,763
18	2,159	6,747
19	2,160	6,734
20	2,146	6,740
21	2,152	6,752
22	2,160	6,758
23	2,149	6,753
24	2,151	6,744
25	2,145	6,741
26	2,155	6,748
27	2,160	6,756
28	2,149	6,743
29	2,159	6,748
30	2,152	6,751
31	2,149	6,740
32	2,157	6,735
33	2,156	6,751
34	2,146	6,735
35	2,160	6,738
36	2,161	6,748
37	2,148	6,743
38	2,162	6,735
39	2,158	6,745
40	2,157	6,743
41	2,145	6,733
42	2,142	6,746
43	2,141	6,745
44	2,154	6,745
45	2,163	6,731
46	2,165	6,741
47	2,167	6,748
48	2,150	6,746
49	2,164	6,732
50	2,148	6,733
Average	2,15	6,75
Cmk	2,20	2,25

Acceptance criteria: Cmk>= 2,0

END

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

CLIENT	MODEL		S/N	MAP
YAZAKI SALTANO DE OVAR, P.E. LDA	RSYP0505-JGD_M		L 94346	
	Cod. KIT	K K010671		
ORDER	**TERMINAL TO BE CRIMPED**			**A#**
4511262877	7116-3251			

APPLICATOR SETUP

SETUP L.D.P. (mm.)=	190,00	STROKE	35 (mm)		MECAL	S.C.	S.T.M.	Note
Load Cal. (Kg.) =	850			Specification		X		
				Terminal Samples		X		
	Setup	Fixing. Ref.▼		Wire Samples		X		
POSITIVE CAM (Terminal present)	X	C		Housing Samples				
NEGATIVE CAM (Terminal absent)		B		Seal Samples		X		7158-3034-50
		Fixing. Ref.▲		Applicounter			No	
				Mobile Ejector			No	
				Carrier strip to be cut			Yes	

FEEDING POINT OF THE TERMINAL				
Hole	Slot	Wire wing	Insulation wing	Other
X				

	Crimp Height	Pull Force	Section	Photo
C				
M			3,00	X
K				

Setup on			Strip length =	
	Mod.	S/N		(mm)
Press	P107C	42887		
Stripper				

CRIMPING

WIRE		INSULATION		BARREL	
	F		C		
Profile dimension		Profile dimension		Profile dimension	
Wire C. Profile Width (mm.)	4,00 (toll. +) 0,02	Insulation C. Profile Width (mm.)	6,9 (toll. +) 0,02	Barrel C. Profile Width (mm.)	(toll. +)


WIRE CHARACTERISTICS — **CRIMPING DIMENSIONS (mm.)**

SECTION	COMPOSITION		Insulation	CONDUCTOR				INSULATION				BARREL			Pull Force	Crimp Force
					Required HEIGHT ±	Required WIDTH ±	Measured WIDTH		Required HEIGHT ±	Required WIDTH ±	Measured WIDTH	Required HEIGHT ±	Required WIDTH ±	Measured WIDTH		
mm²	Nb	Ø	Ø	Index Wire	0,05			Index Insulation	0,10						Toll. ± 2 % (N.)	C.F.A. (KN.)
2,97 Sez. reale																
3,00 NEWA3Z	45	0,29	3,15	1,96	2,30		4,17	1,82	6,00		7,09				500	13,52

CHECK



Description		Rif.	Test
Bent left or right (max)	3°	A	OK
Bent up or down (max)	3°	B	OK
Torsion (max)	3°	C	OK



Description		Rif.	Test
Bellmouth	(0.2-0.5)	D	OK
Cut-off (max)	0.5	E	OK
Wire overlay(min.)	0.5	F	OK


DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
23/10/2018	*Valinotto*	*Bruno*	*Zatti*

N.B.: MECAL affirms that the MECAL tool is in accordance with the above mentioned characteristics

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

YAZAKI SALTANO DE OVAR, P.E. LDA | **WIRE** | **RSYP0505-JGD_M** | **94346**

	Terminal
	7116-3251
Wire Section.	3,00
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

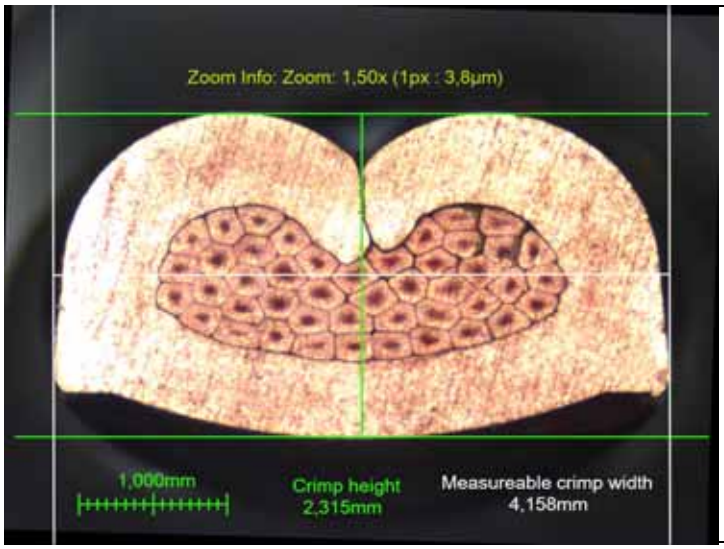

	Terminal
	7116-3251
Wire Section.	3,00
CH. (mm.)	2,30
C.W. (mm.)	4,17
Material Compression (%)	19,3
Wire Compression	
Terminal Compression	

	Terminal
	7116-3251
Wire Section.	3,00
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
23/10/2018	*Valinotto*	*Bruno*	*Zatti*

MECAL	DISTINTA COMPONENTI - PARTS LIST - BESTANDTEILELIST

DATA	23/10/2018
MODELLO	
MODEL	**RSYP0505-JGD_M**
TYPE	
MODELE	
TERMINALE	
TERMINAL	**7116-3251**
KONTAKT	
COSSE	
MATRICOLA	
SERIAL NU	**L 94346**
REGISTRIERNUMMER	
MATRICULE	

CODICE	Qt.	Rif
870550004	1	110
601051006	1	130
600052010	1	150
911190000	1	160
911070012	1	170
840010014	1	180
600030016	3	190
790400003	1	200
790340005	1	210
790420004	1	220
790340003	5	230
790340002	1	235
791640006	1	242
P0119	0,5	245
911110013	1	260
991130001	1	265
991320003	1	280
870620001	1	295
880480008	1	300
871980007	1	310
990400003	1	315
600061016	2	360
601058012	1	370
600050010	1	380
640060020	2	390
991290010	1	400
991290016	1	405
600050014	4	410
610110308	1	420
600041008	1	450
650242004	2	460
991350000	1	480
990010015	1	530
600050012	2	560
620081030	1	570
600052010	1	580
911090007	1	590
991160033	2	670
600050020	1	680
610101005	1	690


CODICE	Qt.	Rif
95127 0207	1	001
91112 0040	1	100
99101 0039	1	120
95127 0087	1	140
99132 0007	1	240
99128 0008	1	250
91103 0043	1	290
91117 0007	1	320
91118 0019	1	330
60005 0035	1	340
91125 0087	1	350
88146 0018	1	355
88146 0019	1	362
60004 0008	4	365
91106 0008	1	430
91105 0018	1	440
99017 0000	1	470
62008 5230	1	490
99131 0001	1	550
91108 0050	1	600
91011 0000	2	610
91124 0262	1	620
60004 0012	1	621
99126 0028	1	622
91116 0027	1	623
91122 0008	1	630
60003 0006	2	640
91148 0087	1	650
60004 1012	2	660
Personal. **L_H157-Y**		
98146 1338	**1**	**1000**
98145 1956	**1**	**1010**
99141 0050	1	1022
99951 0610	1	1030
91130 0349	1	1040
60008 1030	1	1055
60004 0010	1	1058
98127 2933	**1**	**1060**
91134 0218	**1**	**1070**
91133 0447	**1**	**1075**
91035 0002	1	1080
20108 0061	1	1082
60003 0005	1	1085
60004 0016	2	1090
91145 0025	1	1095
91141 0329	1	1096
60004 0010	1	1097
62104 0010	1	1098
60004 0016	2	1100
91143 0039	1	1105
64002 0008	1	1110
91042 0000	1	1115
91145 0000	1	1120
91146 0000	1	1125
60004 0016	1	1130


REV	DATE	DESCRIPTION	REQUIRED	FITMENT


Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069


L_BLK00-RYP


ATTENZIONE: la protezione in gomma (rif. 295) tra le ghiere ed il corpo del miniapplicatore deve essere rimossa prima dell' utilizzo dell' attrezzo.
ATTENTION: the rubber protection (ref. 295) between the ram and the applicator it must be removed before using.

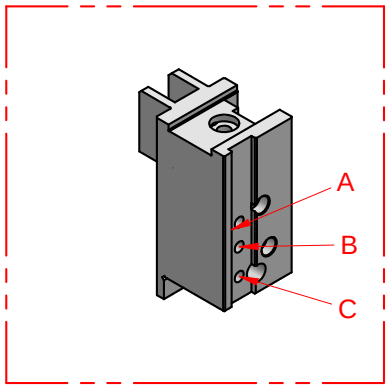










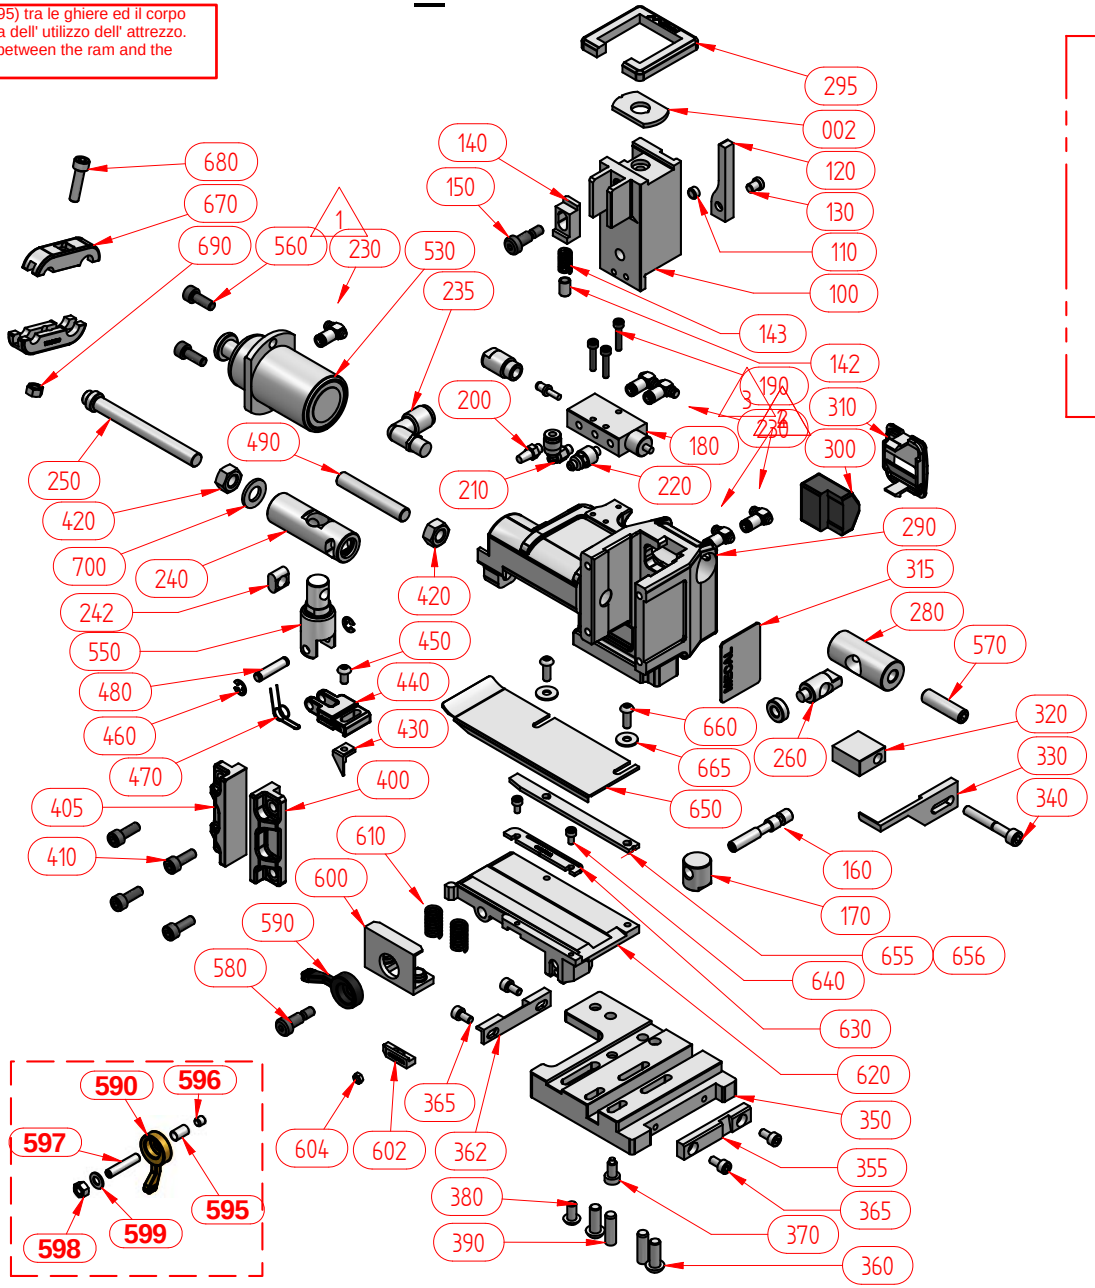

001 GHIERA TIPO "J" "COMBI"

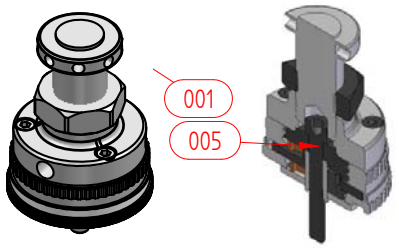


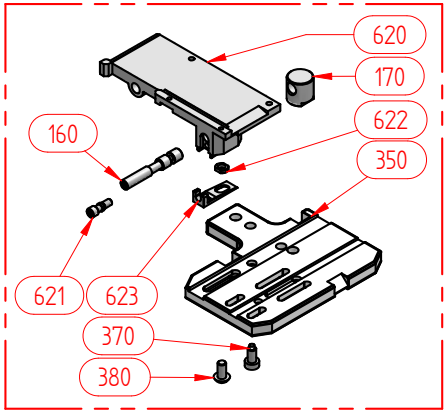


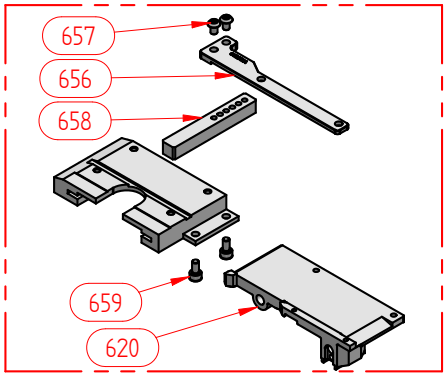

Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069

L_H157-Y

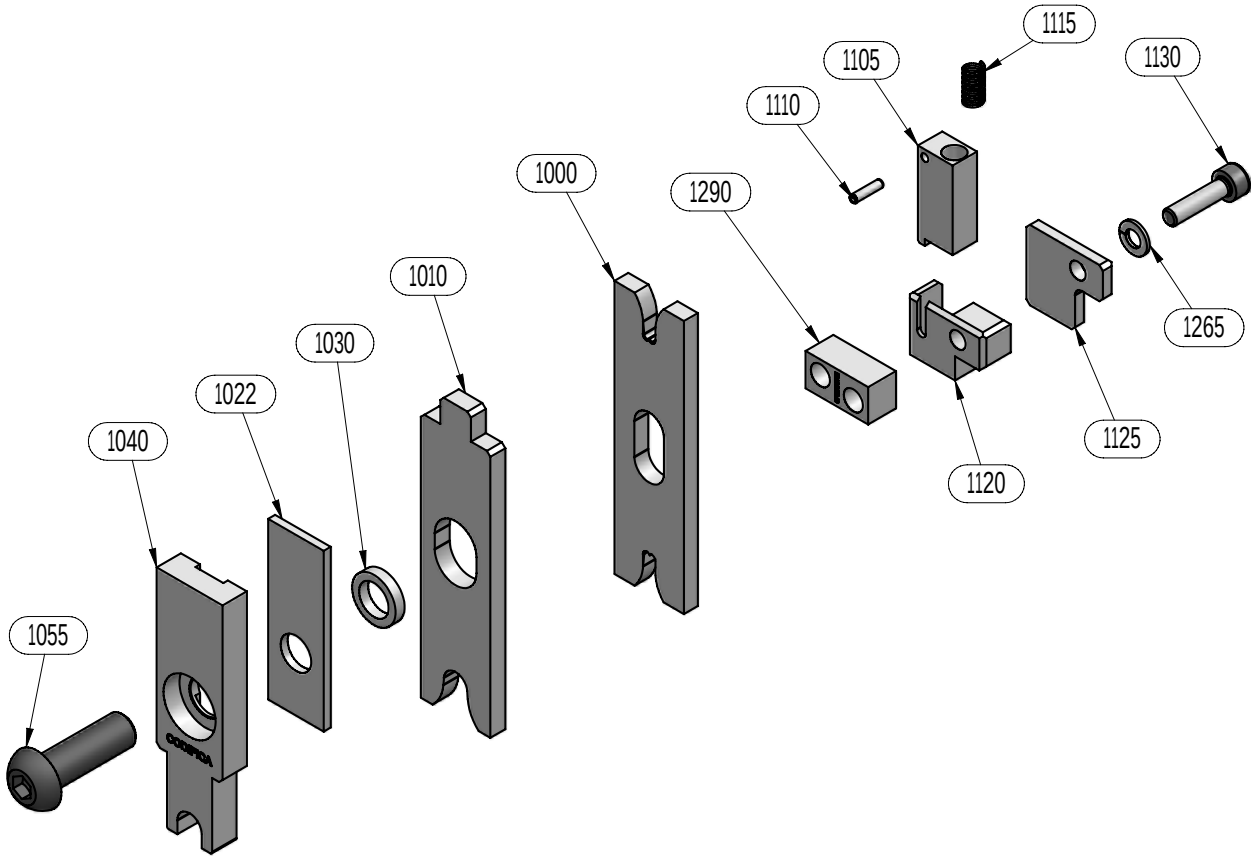

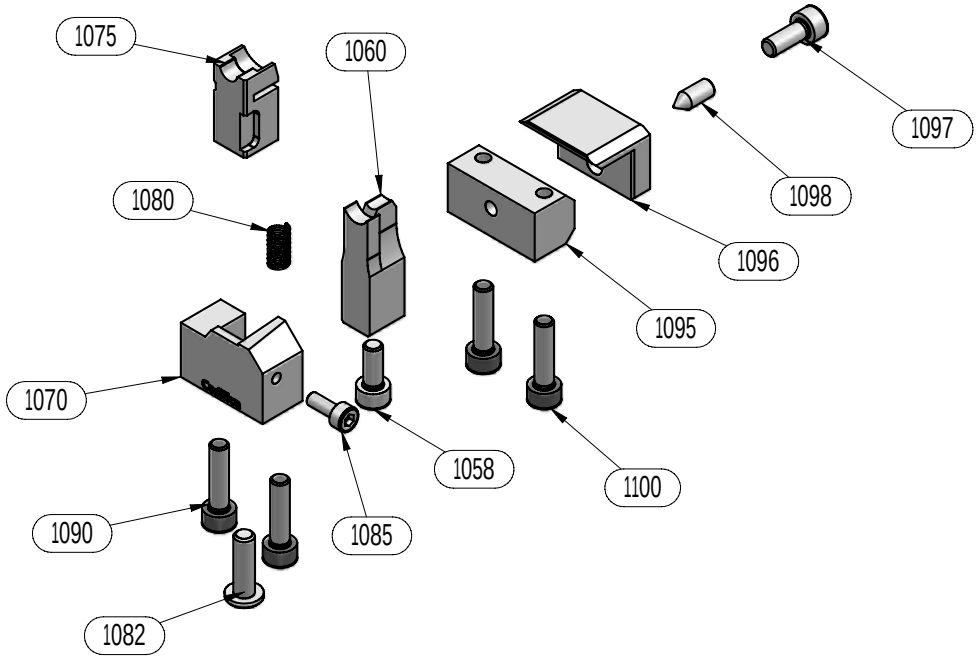

Dichiarazione di incorporazione
Declaration of incorporation

(All. IIB Dir. 2006/42/CE)

Il fabbricante
The manufacturer

Mecal s.r.l. Strada per Felizzano, 18
15043 Fubine (AL) Italia

dichiara
declares

(seguendo la procedura di valutazione della conformità secondo Art.13 Dir. 2006/42/CE)

che la quasi macchina
the partly completed machinery

Miniapplicatore - Stampo Mod. RSYP0505-JGD_M Matr. L94346 anno 2018

Applicatore e stampo per l'aggraffatura di terminali metallici su cavi conduttori

Applica e rispetta i requisiti essenziali di sicurezza
1.1.1 – 1.1.3 –1.3.4 della direttiva 2006/42/CE all I
e la documentazione tecnica pertinente è stata compilata in conformità allegato VIIB

It applies and fulfill the essential safety requirements 1.1.1 - 1.1.3 - 1.3.4 - of Directive 2006/42/CE annex 1 and the related technical documentation has been compiled in accordance with part B of annex VII

Ci impegniamo a trasmettere, in risposta da una richiesta adeguatamente motivata delle autorità nazionali, informazioni pertinenti su miniapplicatori / stampi (quasi macchine) in formato digitalizzato

Si dichiara il divieto della messa in servizio di tutti gli applicatori e stampi MECAL definiti "quasi macchine" prima che le macchine sulle quali vengono incorporate siano state dichiarate conformi alle disposizioni della direttiva 2006/42/CE

It is expressely prohibited to put in use all MECAL applicator - defined "partly completed machines" before that the machines hosting the mentioned Mecal applicators are confirmed in compliance with Directive 2006/42/CE

e autorizza
and authorizes

Claudio Aluffo - Str. Per Felizzano,18, 15043 Fubine (AL) Italia

a costituire il fascicolo tecnico
to compile the technical file

luogo e data 24/10/2018
place and date

Fubine

Mecal s.r.l.
Claudio Aluffo

