QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

CLIENT	MODEL		S/N	MAP
YAZAKI SALTANO DE OVAR, P.E. LDA	RSY3457-JSC1		L 78937	
	Cod. KIT	K K014452		
ORDER	**TERMINAL TO BE CRIMPED**			**A#**
5011990	7116-4157-02			

APPLICATOR SETUP

SETUP L.D.P. (mm.)=	190,00	STROKE	35 (mm)		MECAL	S.C.	S.T.M.	Note
Load Cal. (Kg.) =	850			Specification		X		
		Setup	Fixing. Ref.▼	Terminal Samples		X		
POSITIVE CAM (Terminal present)		X	C	Wire Samples		X		
NEGATIVE CAM (Terminal absent)			B	Housing Samples				
			Fixing. Ref.▲	Seal Samples				
				Applicounter			No	
				Mobile Ejector			No	
				Carrier strip to be cut			No	
				Conform to Mecal norms			Yes	
				Automatic machine				

FEEDING POINT OF THE TERMINAL


Hole	Slot	Wire wing	Insulation wing	Other
X				

CMK	Crimp Height	Pull Force	Section	Photo
			0,50	X

Setup on

	Mod.	S/N
Press	P107C	42877
Stripper		

Strip length = 4,50 (mm)



CRIMPING

WIRE	INSULATION	BARREL
 F	 S	
Profile dimension Wire C. Profile Width (mm.) 2,00 (toll. +) 0,02	Profile dimension Insulation C. Profile Width (mm.) 2,5 (toll. +) 0,02	Profile dimension Barrel C. Profile Width (mm.) (toll. +)


WIRE CHARACTERISTICS — **CRIMPING DIMENSIONS (mm.)**

SECTION	COMPOSITION		Insulation	CONDUCTOR				INSULATION				BARREL			Pull Force	Crimp Force
					Required HEIGHT ±	Required WIDTH ±	Measured WIDTH		Required HEIGHT ±	Required WIDTH ±	Measured WIDTH	Required HEIGHT ±	Required WIDTH ±	Measured WIDTH		
mm²	Nb	Ø	Ø	Index Wire	0,05			Index Insulation	0,10						Toll. ± 2 % (N.)	C.F.A. (KN.)
0,93 Sez. reale 1,00 FLRYA	19	0,25	1,90	2,00	1,35	2,05	2,07	1,64	2,55	2,55	2,56				160	3,90
0,48 Sez. reale 0,50 FLRYA	19	0,18	1,60	2,15	1,20	2,05	2,05	1,80	2,15	2,55	2,54				85	4,21

CHECK



Description		Rif.	Test
Bent left or right (max)	3°	A	OK
Bent up or down (max)	3°	B	OK
Torsion (max)	3°	C	OK



Description		Rif.	Test
Bellmouth	(0.2-0.5)	D	OK
Cut-off (max)	0.5	E	OK
Wire overlay(min.)	0.5	F	OK


DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
22/6/2016	*Amarotto*	*Bruno*	*Zatti*

N.B.: MECAL affirms that the MECAL tool is in accordance with the above mentioned characteristics

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

YAZAKI SALTANO DE OVAR, P.E. LDA | **WIRE** | **RSY3457-JSC1** | **78937**

	Terminal
	7116-4157-02
Wire Section.	0,50
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

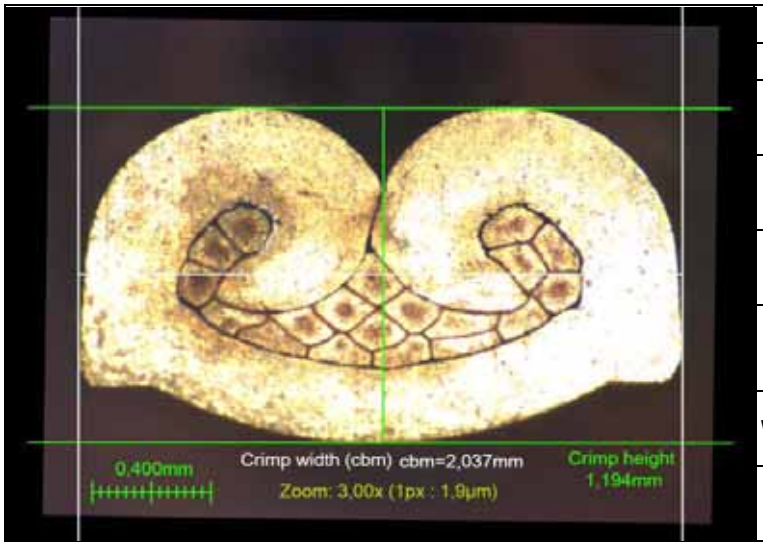

	Terminal
	7116-4157-02
Wire Section.	0,50
CH. (mm.)	1,20
C.W. (mm.)	2,05
Material Compression (%)	18,7
Wire Compression	
Terminal Compression	

	Terminal
	7116-4157-02
Wire Section.	0,50
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
22/6/2016	*Amarotto*	*Bruno*	*Zatti*

MECAL

DISTINTA COMPONENTI - PARTS LIST - BESTANDTEILELIST

DATA 22/06/2016

MODELLO
MODEL **RSY3457-JSC1**
TYPE
MODELE

TERMINALE
TERMINAL **7116-4157-02**
KONTAKT
COSSE

MATRICOLA
SERIAL NU **L 78937**
REGISTRIERNUMMER
MATRICULE

CODICE	Qt.	Rif
870550004	1	110
601051006	2	130
600052010	1	150
911190000	1	160
911070012	1	170
650231018	1	180
630104106	1	190
990270004	1	200
991320002	1	210
600041106	1	220
991280007	1	230
991320001	1	240
610111308	1	250
911110013	1	260
991300008	1	280
870620001	1	295
880480008	1	300
871980007	1	310
990400003	1	315
600061016	2	360
601058012	1	370
600050010	1	380
640060020	2	390
991290010	1	400
991290016	1	405
600050014	4	410
640050020	1	420
600041006	1	450
650242004	2	460
991350000	1	480
600050016	2	490
600050016	1	500
991590000	1	510
911010006	1	520
991340002	1	530
991330003	1	540
991310000	1	560
640050020	1	570
600052010	1	580
911090007	1	590


CODICE	Qt.	Rif
95127 0207	1	001
60006 0040	1	005
91112 0035	1	100
99101 0039	1	120
95127 0047	1	140
91103 0045	1	290
91117 0053	1	320
91118 0184	1	330
60005 0012	1	339
60005 0035	1	340
99017 0019	1	343
60005 2010	1	344
91125 0074	1	350
88146 0018	1	355
88146 0019	1	362
60004 0008	4	365
91106 0008	1	430
91105 0018	1	440
99017 0000	1	470
91102 0001	1	550
91108 0050	1	600
91011 0000	2	610
91124 0234	1	620
60004 0012	1	621
99126 0028	1	622
91116 0027	1	623
91122 0000	1	630
60003 0006	2	640
91148 0364	1	650
91148 0382	1	655
91148 0383	1	656
63010 4104	2	665
60004 1012	2	660
Personal. **L_H112-Y**		
98146 0472	**1**	**1000**
98145 0430	**1**	**1010**
99951 0360	1	1030
91130 0305	1	1040
99059 0000	1	1045
99155 0119	1	1050
60008 1025	1	1055
60004 0010	1	1058
98127 0592	**1**	**1060**
91134 0177	**1**	**1070**
91133 0108	**1**	**1075**
91035 0002	1	1080
20108 0061	1	1082
60003 0008	1	1085
60004 0016	2	1090
60003 0006	1	1093
91145 0025	1	1095
91141 0329	1	1096
60004 0010	1	1097
62104 0010	1	1098
60004 0016	2	1100
91143 0011	1	1105
64002 0008	1	1110
91042 0000	1	1115
91145 0000	1	1120
91146 0000	1	1125
60004 0016	1	1130


REV	DATE	DESCRIPTION	REQUIRED	FITMENT


Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069


L_BLK00-RY


ATTENZIONE: la protezione in gomma (rif. 295) tra le ghiere ed il corpo del miniapplicatore deve essere rimossa prima dell' utilizzo dell' attrezzo.
ATTENTION: the rubber protection (ref. 295) between the ram and the applicator it must be removed before using.

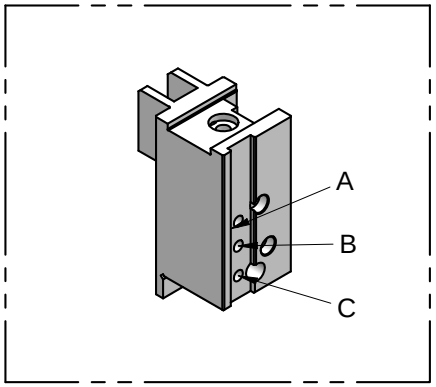


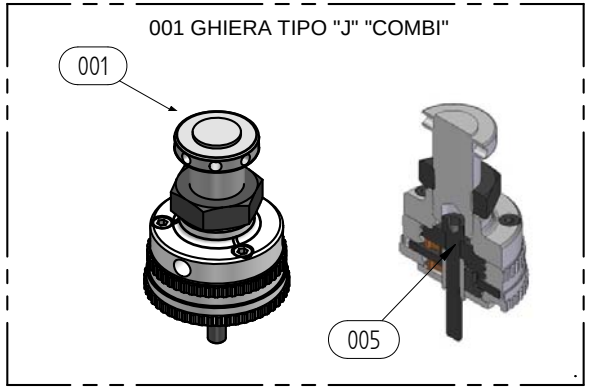





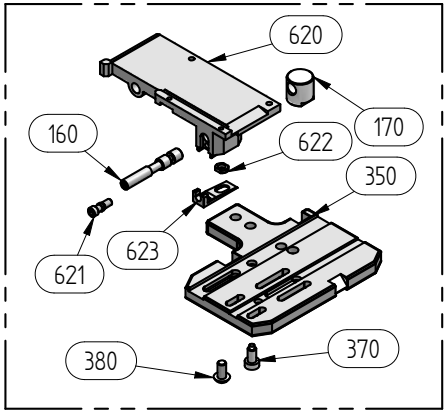



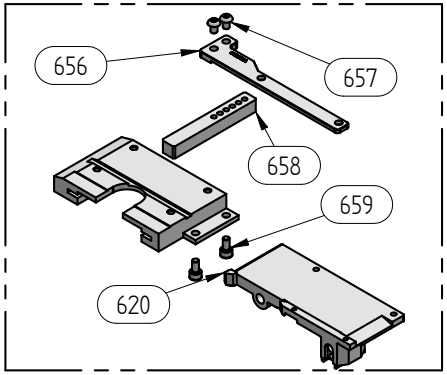



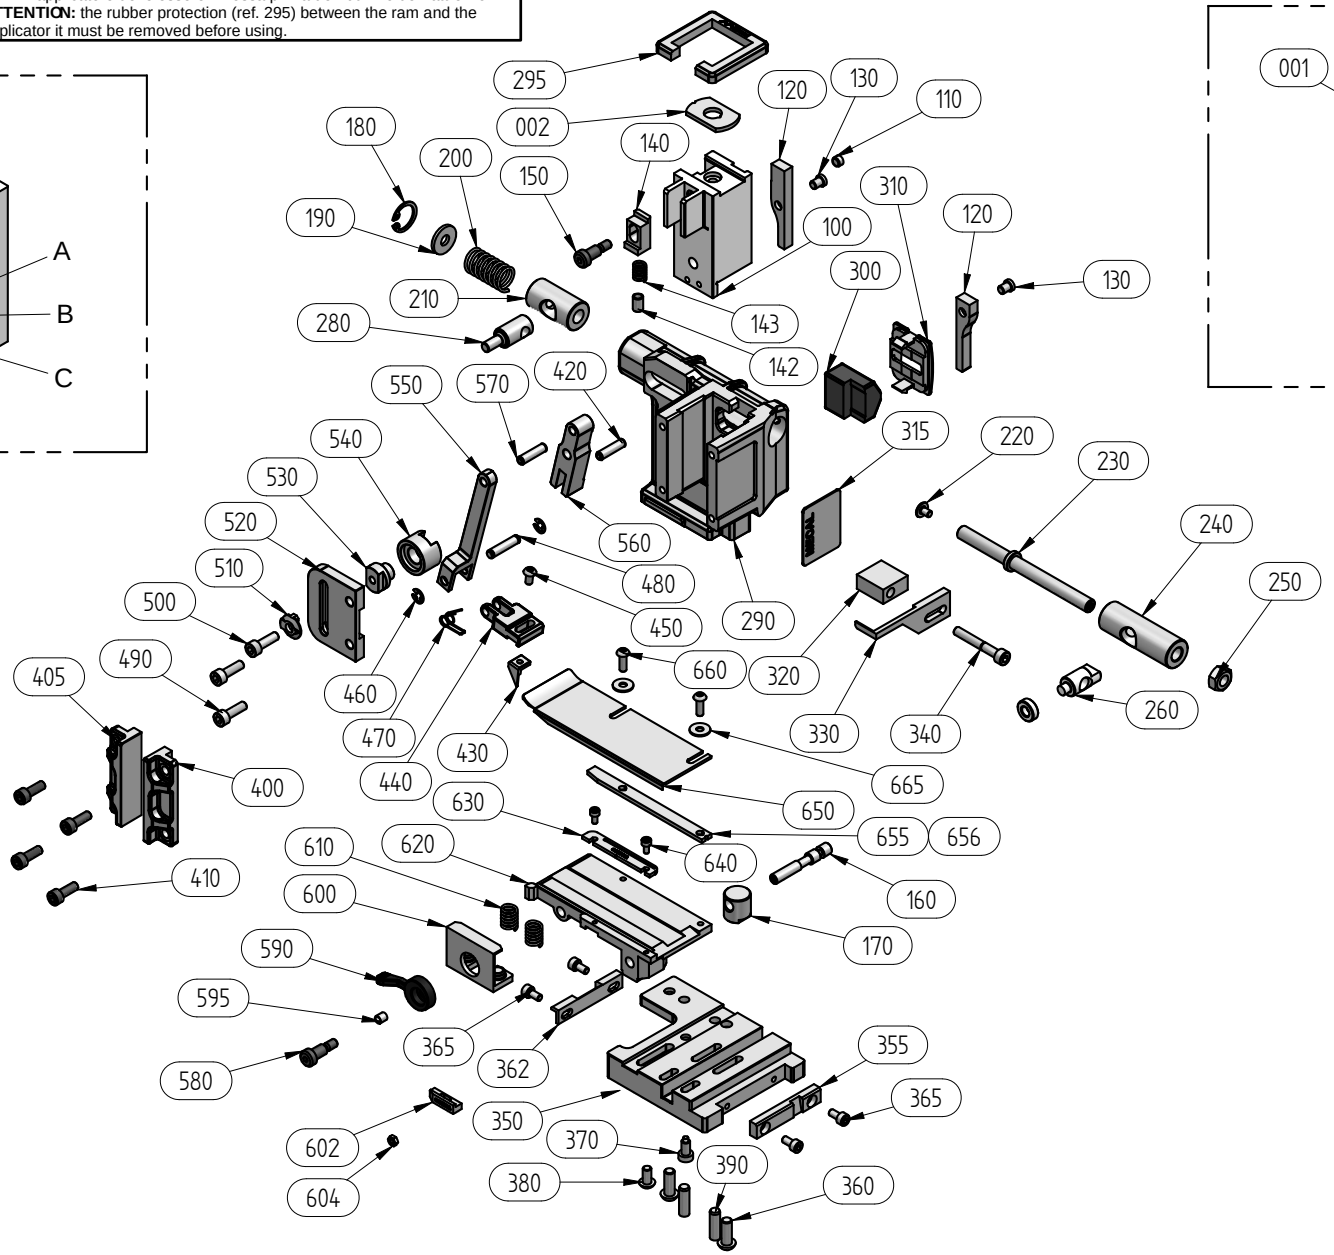

Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069

L_H112-Y

