PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
L81797

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7115-1636 * SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7115-1636-02	**7157-3033-70**	**RSYP2842~JGD_M**	**YSD-3500327883**	*

Applicable Terminals for this Tool:

7115-1636-02

Anvil		Wire Crimper		Insulation Crimper	
7115-1636KADM	(N)	7115-1636KWM	(N)	7115-1636KIDM	(1)
CW (c) 2,92	*CW (i)* 5,90	*CW* 2,90		*CW* 5,90	

1 - VISUAL / MEASURED CHECK ITEMS

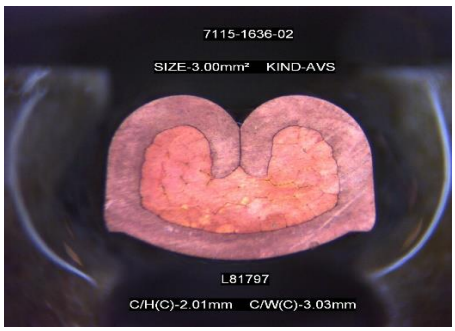
			Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
	The two sides of the insulation grips are in the correct position.	O	0~0.40mm 0.30~0.80mm	0.27 0.71		The Bell Mouth is within the spec.(*)	O
	Not found any Bell Mouth in the insulation area.	O	0~0.40mm	0.37		The dimension of the cutting carrier is within the spec.(*)	O
	The lance height and shape are not deformed.	O	2º 2º	0.8 -		Bend up and Bend down are within the criteria(*)	O
	Not found any burr in the cutting carrier.	O	0.50~1.50mm	1.08		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	5º	1.6		The terminal is not bent sideway, look-king from the top(*)	O
	The wire barrel is free from major burrs.	O	5º	0.5		The body of the terminal is not twisted(*)	O

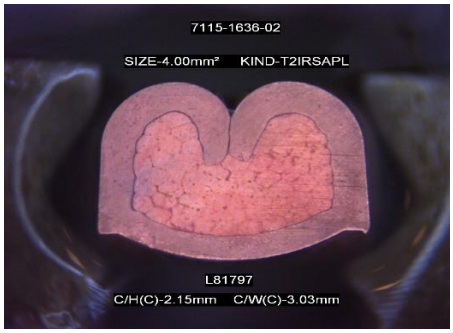
(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	2	2,01	2,13
	+/-0.05		



	NOMINAL	AVERAGE	Cmk
mm	2,15	2,16	2,08
	+/-0.05		

REMARKS:

Aplicable wire range >2.50mm²~4.00mm².
Wire size 3.00mm² C/W(I)-6.28mm
Wire size 4.00mm² C/W(I)-6.33mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
		
Date: 2024/fev/22	Date: 2024/fev/08	Date: 2024/fev/08

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
L81797

LOWER WIRE KIND & SIZE

Wire kind: AVS

Wire size: 3 mm^2

Nominal Cr. Height:	2	6,7	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,010	6,734
2	2,017	6,731
3	2,008	6,717
4	2,008	6,710
5	2,009	6,722
6	2,015	6,725
7	2,014	6,710
8	2,007	6,721
9	2,014	6,719
10	2,014	6,724
11	2,006	6,709
12	2,017	6,712
13	2,015	6,724
14	2,003	6,709
15	2,012	6,723
16	2,015	6,719
17	2,013	6,713
18	2,019	6,725
19	2,015	6,716
20	2,002	6,709
21	2,001	6,725
22	1,997	6,726
23	2,009	6,711
24	2,001	6,716
25	1,995	6,725
26	2,007	6,713
27	1,999	6,709
28	2,007	6,723
29	1,996	6,720
30	2,006	6,707
31	2,008	6,702
32	1,996	6,716
33	2,010	6,713
34	2,014	6,702
35	2,002	6,724
36	1,997	6,707
37	2,010	6,711
38	2,002	6,724
39	2,010	6,708
40	2,014	6,708
41	2,017	6,723
42	2,001	6,723
43	1,998	6,729
44	2,008	6,723
45	2,013	6,712
46	2,005	6,725
47	2,012	6,720
48	2,005	6,707
49	2,013	6,721
50	1,998	6,722
Average	2,01	6,72
Cmk	2,13	3,55

UPPER WIRE KIND & SIZE

Wire kind: T2IRSAPL

Wire size: 4 mm^2

Nominal Cr. Height:	2,15	6,7	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,160	6,732
2	2,166	6,736
3	2,158	6,727
4	2,163	6,721
5	2,169	6,735
6	2,153	6,724
7	2,160	6,723
8	2,167	6,719
9	2,167	6,726
10	2,153	6,730
11	2,153	6,725
12	2,165	6,720
13	2,158	6,731
14	2,150	6,722
15	2,158	6,730
16	2,158	6,736
17	2,149	6,725
18	2,160	6,716
19	2,167	6,731
20	2,151	6,732
21	2,159	6,729
22	2,162	6,730
23	2,149	6,720
24	2,160	6,730
25	2,166	6,734
26	2,151	6,720
27	2,159	6,731
28	2,164	6,715
29	2,149	6,734
30	2,154	6,714
31	2,164	6,726
32	2,152	6,732
33	2,153	6,718
34	2,165	6,712
35	2,151	6,728
36	2,155	6,732
37	2,165	6,714
38	2,156	6,719
39	2,145	6,730
40	2,159	6,716
41	2,164	6,708
42	2,147	6,722
43	2,155	6,724
44	2,161	6,710
45	2,166	6,725
46	2,145	6,722
47	2,143	6,710
48	2,157	6,730
49	2,159	6,715
50	2,147	6,709
Average	2,16	6,72
Cmk	2,08	3,26

Acceptance criteria: Cmk>= 2,0

END

PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
L81797

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7115-1636 * SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7115-1636-02	**7157-3033-70**	**RSYP2842~JGD_M**	**YSD-3500327883**	*

Applicable Terminals for this Tool:

7115-1636-02

Anvil		Wire Crimper		Insulation Crimper	
7115-1636KADM	(N)	7115-1636KWM	(N)	7115-1636KIDM	(1)
CW (c) 2,92	*CW (i)* 5,90	*CW* 2,90		*CW* 5,90	

1 - VISUAL / MEASURED CHECK ITEMS

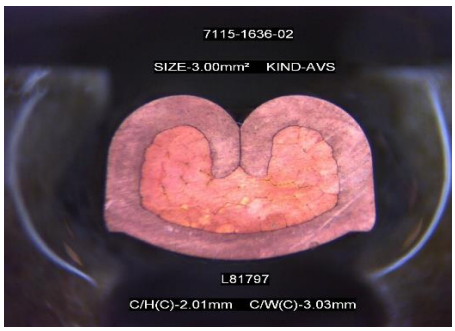
			Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
	The two sides of the insulation grips are in the correct position.	O	0~0.40mm 0.30~0.80mm	0.27 0.71		The Bell Mouth is within the spec.(*)	O
	Not found any Bell Mouth in the insulation area.	O	0~0.40mm	0.37		The dimension of the cutting carrier is within the spec.(*)	O
	The lance height and shape are not deformed.	O	2º 2º	0.8 -		Bend up and Bend down are within the criteria(*)	O
	Not found any burr in the cutting carrier.	O	0.50~1.50mm	1.08		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	5º	1.6		The terminal is not bent sideway, look-king from the top(*)	O
	The wire barrel is free from major burrs.	O	5º	0.5		The body of the terminal is not twisted(*)	O

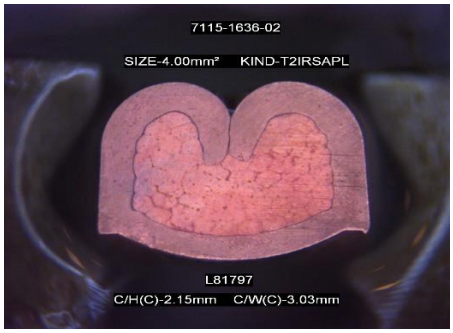
(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	2	2,01	2,13
	+/-0.05		



	NOMINAL	AVERAGE	Cmk
mm	2,15	2,16	2,08
	+/-0.05		

REMARKS:

Aplicable wire range >2.50mm²~4.00mm².
Wire size 3.00mm² C/W(I)-6.28mm
Wire size 4.00mm² C/W(I)-6.33mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
		
Date: 2024/fev/22	Date: 2024/fev/08	Date: 2024/fev/08

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
L81797

LOWER WIRE KIND & SIZE

Wire kind: AVS

Wire size: 3 mm^2

Nominal Cr. Height:	2	6,7	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,010	6,734
2	2,017	6,731
3	2,008	6,717
4	2,008	6,710
5	2,009	6,722
6	2,015	6,725
7	2,014	6,710
8	2,007	6,721
9	2,014	6,719
10	2,014	6,724
11	2,006	6,709
12	2,017	6,712
13	2,015	6,724
14	2,003	6,709
15	2,012	6,723
16	2,015	6,719
17	2,013	6,713
18	2,019	6,725
19	2,015	6,716
20	2,002	6,709
21	2,001	6,725
22	1,997	6,726
23	2,009	6,711
24	2,001	6,716
25	1,995	6,725
26	2,007	6,713
27	1,999	6,709
28	2,007	6,723
29	1,996	6,720
30	2,006	6,707
31	2,008	6,702
32	1,996	6,716
33	2,010	6,713
34	2,014	6,702
35	2,002	6,724
36	1,997	6,707
37	2,010	6,711
38	2,002	6,724
39	2,010	6,708
40	2,014	6,708
41	2,017	6,723
42	2,001	6,723
43	1,998	6,729
44	2,008	6,723
45	2,013	6,712
46	2,005	6,725
47	2,012	6,720
48	2,005	6,707
49	2,013	6,721
50	1,998	6,722
Average	2,01	6,72
Cmk	2,13	3,55

UPPER WIRE KIND & SIZE

Wire kind: T2IRSAPL

Wire size: 4 mm^2

Nominal Cr. Height:	2,15	6,7	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,160	6,732
2	2,166	6,736
3	2,158	6,727
4	2,163	6,721
5	2,169	6,735
6	2,153	6,724
7	2,160	6,723
8	2,167	6,719
9	2,167	6,726
10	2,153	6,730
11	2,153	6,725
12	2,165	6,720
13	2,158	6,731
14	2,150	6,722
15	2,158	6,730
16	2,158	6,736
17	2,149	6,725
18	2,160	6,716
19	2,167	6,731
20	2,151	6,732
21	2,159	6,729
22	2,162	6,730
23	2,149	6,720
24	2,160	6,730
25	2,166	6,734
26	2,151	6,720
27	2,159	6,731
28	2,164	6,715
29	2,149	6,734
30	2,154	6,714
31	2,164	6,726
32	2,152	6,732
33	2,153	6,718
34	2,165	6,712
35	2,151	6,728
36	2,155	6,732
37	2,165	6,714
38	2,156	6,719
39	2,145	6,730
40	2,159	6,716
41	2,164	6,708
42	2,147	6,722
43	2,155	6,724
44	2,161	6,710
45	2,166	6,725
46	2,145	6,722
47	2,143	6,710
48	2,157	6,730
49	2,159	6,715
50	2,147	6,709
Average	2,16	6,72
Cmk	2,08	3,26

Acceptance criteria: Cmk>= 2,0

END