PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
L81801






TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70095222 SEQUENCE Nº 9



Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7009-5222-02	*	**RSYP6465-J_M**	**YSD-3500166433**	*

Anvil			Wire Crimper			Insulation Crimper		
7009-5222DANDAPM		(N)	7009-5222DWM		(N)	7009-5222DIM		(N)
CW (c)	5.52	*CW (i)* 7.20	*CW*	5.50		*CW*	7.20	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

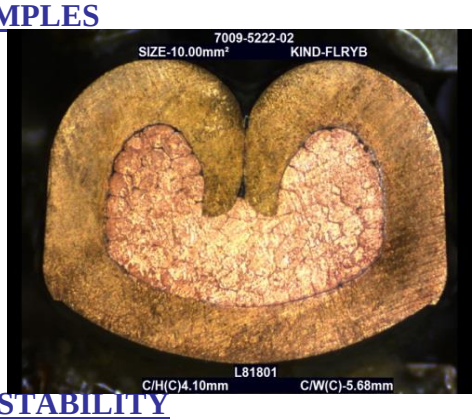
	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up and Bend down are within the criteria**(*)**	**O**
	The exposed conductor is within the spec.(*)	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**NA**

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	3.5	3.50	3.86
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	4.1	4.10	3.36
	+/-0.05		

REMARKS:

Aplicable wire range 6.00mm² ~ 10.00mm²
Wire 6.00mm² C/W(I)-6.95mm
Wire 10.00mm² C/W(I)-7.29mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 5061	PREPARED (Operator) nº 18597
	Luis Dias	Rui Domingues
Date: 2020-mai-08	Date: 2020-mai-08	Date: 2020-mai-07

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
L81801

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 6 mm²

Nominal Cr. Height:	3.5	5.5	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	3.499	5.494
2	3.504	5.497
3	3.504	5.504
4	3.504	5.497
5	3.499	5.504
6	3.501	5.495
7	3.491	5.502
8	3.502	5.500
9	3.492	5.496
10	3.502	5.496
11	3.494	5.500
12	3.492	5.494
13	3.494	5.496
14	3.495	5.495
15	3.506	5.501
16	3.500	5.487
17	3.497	5.487
18	3.495	5.490
19	3.502	5.496
20	3.505	5.499
21	3.500	5.492
22	3.503	5.490
23	3.505	5.503
24	3.500	5.495
25	3.500	5.506
26	3.500	5.507
27	3.503	5.495
28	3.497	5.506
29	3.496	5.495
30	3.502	5.493
31	3.496	5.504
32	3.496	5.503
33	3.506	5.503
34	3.494	5.501
35	3.499	5.499
36	3.498	5.499
37	3.494	5.499
38	3.498	5.500
39	3.502	5.504
40	3.498	5.502
41	3.492	5.499
42	3.498	5.502
43	3.496	5.501
44	3.497	5.499
45	3.497	5.499
46	3.497	5.503
47	3.498	5.499
48	3.495	5.499
49	3.488	5.501
50	3.500	5.496
Average	3.50	5.50
Cmk	3.86	7.00

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 10 mm²

Nominal Cr. Height:	4.1	6.8	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	4.098	6.804
2	4.103	6.803
3	4.098	6.803
4	4.106	6.801
5	4.099	6.797
6	4.106	6.797
7	4.100	6.795
8	4.108	6.798
9	4.103	6.796
10	4.103	6.800
11	4.106	6.797
12	4.098	6.805
13	4.106	6.798
14	4.104	6.799
15	4.106	6.800
16	4.102	6.805
17	4.102	6.800
18	4.102	6.790
19	4.097	6.806
20	4.101	6.790
21	4.102	6.804
22	4.104	6.801
23	4.108	6.795
24	4.098	6.800
25	4.104	6.799
26	4.098	6.794
27	4.093	6.804
28	4.114	6.796
29	4.094	6.804
30	4.091	6.792
31	4.095	6.794
32	4.096	6.804
33	4.096	6.797
34	4.099	6.802
35	4.099	6.798
36	4.093	6.804
37	4.101	6.805
38	4.092	6.803
39	4.102	6.795
40	4.094	6.799
41	4.101	6.795
42	4.092	6.799
43	4.091	6.801
44	4.101	6.802
45	4.101	6.797
46	4.104	6.797
47	4.097	6.800
48	4.096	6.802
49	4.102	6.801
50	4.098	6.798
Average	4.10	6.80
Cmk	3.36	8.36

Acceptance criteria: Cmk>= 2.0

END