QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

CLIENT	MODEL		S/N	MAP
YAZAKI SALTANO DE OVAR, P.E. LDA	RSYP0325-JSN_A		L 83803	
	Cod. KIT	K K010214		
ORDER	TERMINAL TO BE CRIMPED			A#
4510189296	7116-9969-02			

APPLICATOR SETUP

SETUP L.D.P. (mm.)=	190,00	STROKE	35 (mm)		MECAL	S.C.	S.T.M.	Note
Load Cal. (Kg.) =	850			Specification		X		
				Terminal Samples		X		
		Setup	Fixing. Ref.▼	Wire Samples		X		
POSITIVE CAM (Terminal present)		X	C	Housing Samples				
NEGATIVE CAM (Terminal absent)			B	Seal Samples				
			Fixing. Ref.▲	Applicounter			No	
				Mobile Ejector			No	
				Carrier strip to be cut			No	


FEEDING POINT OF THE TERMINAL				
Hole	Slot	Wire wing	Insulation wing	Other
X				

Automatic machine

C M K	Crimp Height	Pull Force	Section	Photo
			2,50	X

Setup on	Mod.	S/N
Press	P107C	42877
Stripper		

Strip length = (mm)



CRIMPING

WIRE	INSULATION	BARREL
 F	 F	
Profile dimension	Profile dimension	Profile dimension
Wire C. Profile Width (mm.) 3,3 (toll. +) 0,02	Insulation C. Profile Width (mm.) 4,6 (toll. +) 0,02	Barrel C. Profile Width (mm.) (toll. +)

WIRE CHARACTERISTICS


CRIMPING DIMENSIONS (mm.)

SECTION	COMPOSITION		Insulation	CONDUCTOR				INSULATION				BARREL			Pull Force	Crimp Force
					Required HEIGHT ±	Required WIDTH ±	Measured WIDTH		Required HEIGHT ±	Required WIDTH ±	Measured WIDTH	Required HEIGHT ±	Required WIDTH ±	Measured WIDTH		
mm²	Nb	Ø	Ø	Index Wire	0,05			Index Insulation	0,10						Toll. ± 2 % (N.)	C.F.A. (KN.)
3,70 Sez. reale 4,00	56	0,29	3,60	1,94	2,35		3,39	1,90	4,50		4,92				700	6,71
2,26 Sez. reale 2,50	50	0,24	2,80	2,30	2,00		3,35	1,90	4,20		4,83				430	7,03

CHECK



Description		Rif.	Test
Bent left or right (max)	3°	A	OK
Bent up or down (max)	3°	B	OK
Torsion (max)	3°	C	OK



Description		Rif.	Test
Bellmouth	(0.2-0.5)	D	OK
Cut-off (max)	0.5	E	OK
Wire overlay(min.)	0.5	F	OK


DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
18/5/2017	*Amarotto*	*Bruno*	*Zatti*

N.B.: MECAL affirms that the MECAL tool is in accordance with the above mentioned characteristics

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

YAZAKI SALTANO DE OVAR, P.E. LDA | **WIRE** | **RSYP0325-JSN_A** | **83803**

	Terminal
	7116-9969-02
Wire Section.	2,50
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

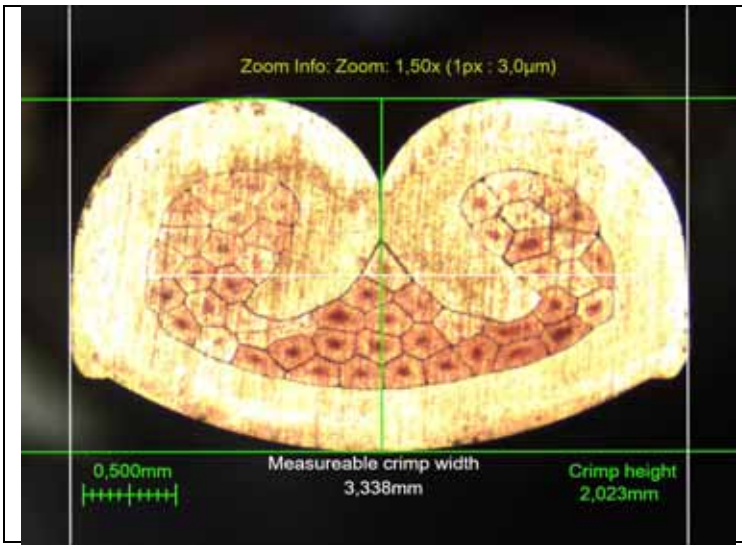

	Terminal
	7116-9969-02
Wire Section.	2,50
CH. (mm.)	2,00
C.W. (mm.)	3,35
Material Compression (%)	20,1
Wire Compression	
Terminal Compression	

	Terminal
	7116-9969-02
Wire Section.	2,50
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
18/5/2017	*Amarotto*	*Bruno*	*Zatti*

MECAL	DISTINTA COMPONENTI - PARTS LIST - BESTANDTEILELIST

DATA	18/05/2017
MODELLO	
MODEL	**RSYP0325-JSN_A**
TYPE	
MODELE	
TERMINALE	
TERMINAL	**7116-9969-02**
KONTAKT	
COSSE	
MATRICOLA	
SERIAL NU	**L 83803**
REGISTRIERNUMMER	
MATRICULE	

CODICE	Qt.	Rif
870550004	1	110
601051006	1	130
600052010	1	150
911190000	1	160
911070012	1	170
840010014	1	180
600030016	3	190
790400003	1	200
790340005	1	210
790420004	1	220
790340003	5	230
790340002	1	235
791640006	1	242
P0138	0,5	245
911110013	1	260
991130001	1	265
991320003	1	280
870620001	1	295
880480008	1	300
871980007	1	310
990400003	1	315
600061016	2	360
601058012	1	370
600050010	1	380
640060020	2	390
991290010	1	400
991290016	1	405
600050014	4	410
610110308	1	420
600041006	1	450
650242004	2	460
991350000	1	480
659233093	1	500
659232118	1	510
659230121	1	520
791190002	1	530
791210002	1	540
600050012	2	560
620081030	1	570
600052010	1	580
911090007	1	590
991160033	2	670
600050020	1	680
610101005	1	690


CODICE	Qt.	Rif
95127 0207	1	001
60006 0040	1	005
91112 0035	1	100
99101 0039	1	120
95127 0046	1	140
99132 0007	1	240
99128 0008	1	250
91103 0042	1	290
91117 0053	1	320
91118 0184	1	330
99017 0019	1	343
60005 2010	1	344
91125 0074	1	350
88146 0018	1	355
88146 0019	1	362
60004 0006	4	365
91106 0008	1	430
91105 0018	1	440
99017 0000	1	470
62008 5240	1	490
99131 0001	1	550
91108 0050	1	600
91011 0000	2	610
91124 0271	1	620
60004 0012	1	621
99126 0028	1	622
91116 0027	1	623
91122 0000	1	630
60003 0008	2	640
91148 0360	1	650
60004 1012	2	660
91148 0382	1	655
91148 0384	1	656
63010 4104	2	665
Personal. **L_G00-Y**		
98146 2046	**1**	**1000**
98145 1871	**1**	**1010**
99951 0300	1	1030
91130 0333	1	1040
60008 1025	1	1055
60004 0010	1	1058
98127 2810	**1**	**1060**
91134 0177	**1**	**1070**
91133 0108	**1**	**1075**
91035 0002	1	1080
20108 0061	1	1082
60003 0008	1	1085
60004 0016	2	1090
60003 0006	1	1093
91145 0025	1	1095
91141 0359	1	1096
60004 0010	1	1097
62104 0010	1	1098
60004 0016	2	1100


REV	DATE	DESCRIPTION	REQUIRED	FITMENT


Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069


L_BLK00-RYP


ATTENZIONE: la protezione in gomma (rif. 295) tra le ghiere ed il corpo del miniapplicatore deve essere rimossa prima dell' utilizzo dell' attrezzo.
ATTENTION: the rubber protection (ref. 295) between the ram and the applicator it must be removed before using.

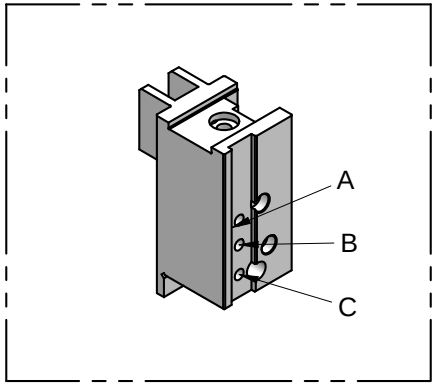










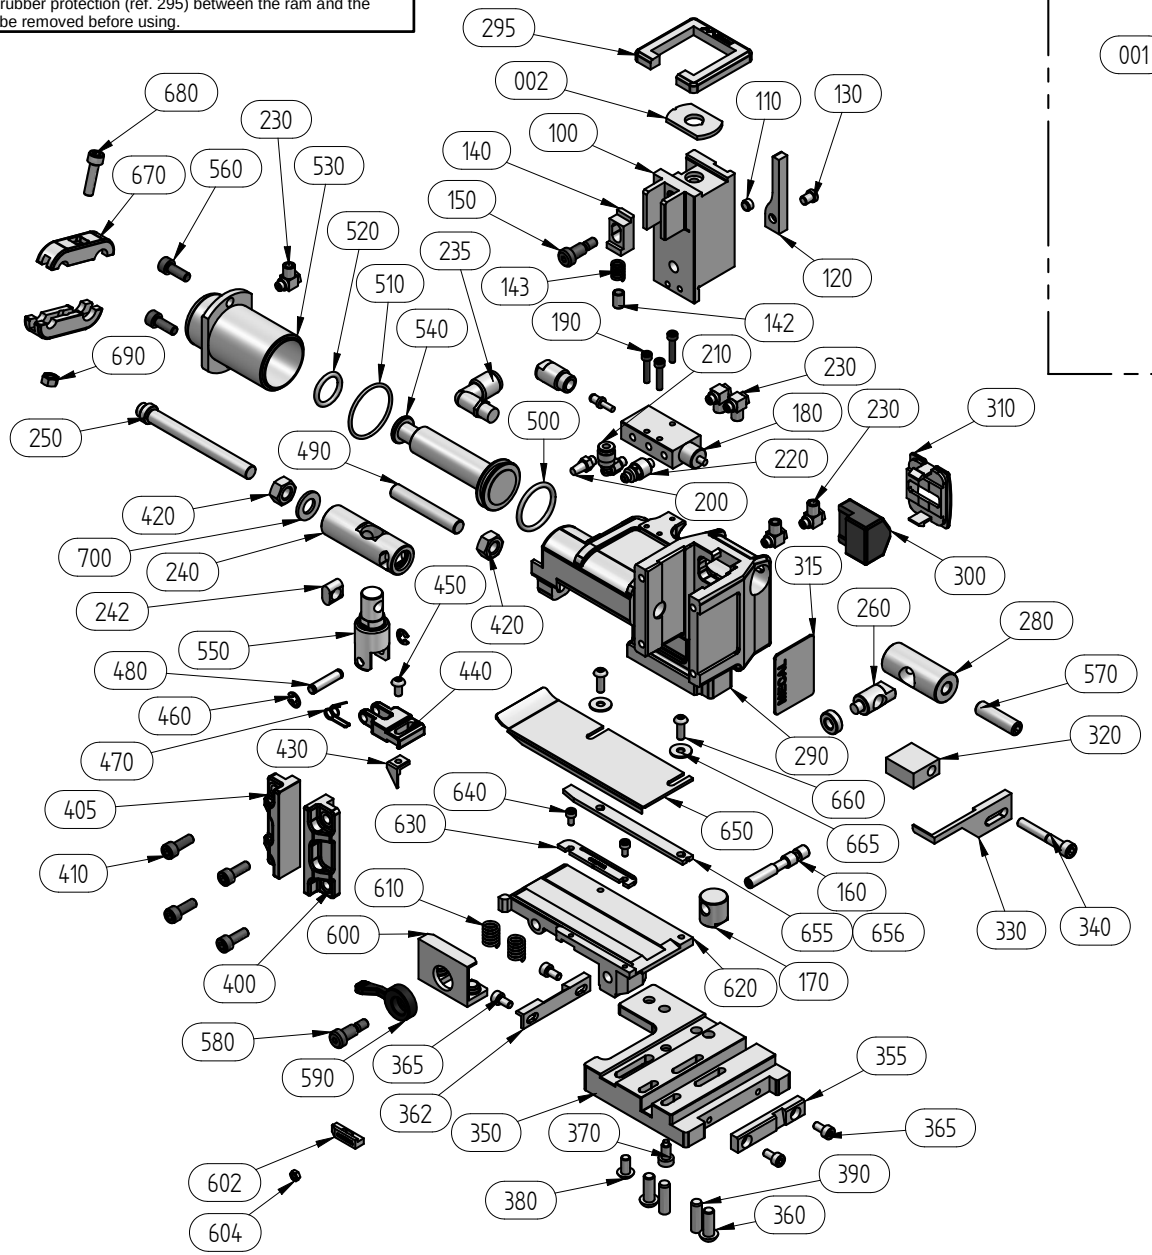

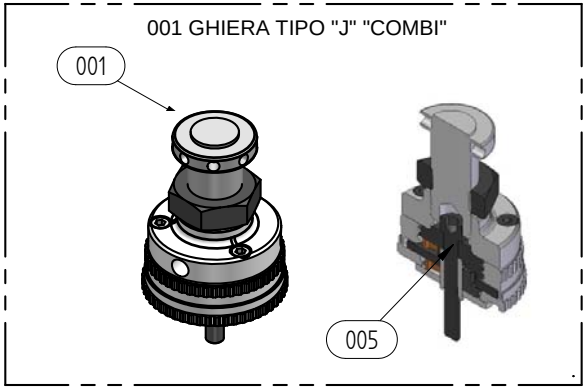

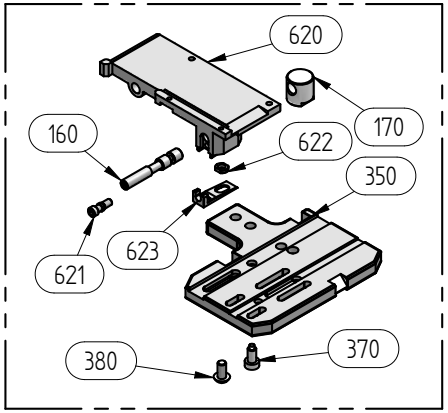

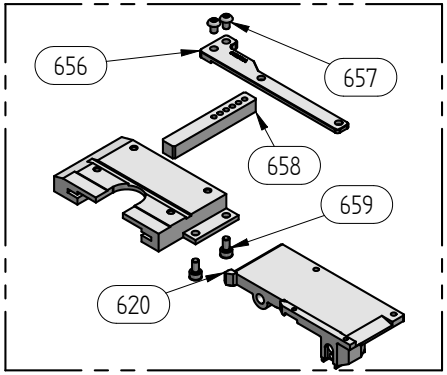

Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069

L_G00-Y

