QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

CLIENT	MODEL		S/N	MAP
YAZAKI SALTANO DE OVAR, P.E. LDA	RSY3364-JGE1_M		L 84000	
	Cod. KIT	K K012736		
ORDER	TERMINAL TO BE CRIMPED			A#
4510189390	7116-4916-06			


APPLICATOR SETUP

SETUP L.D.P. (mm.)=	190,00	STROKE	35 (mm)		MECAL	S.C.	S.T.M.	Note
Load Cal. (Kg.) =	850			Specification		X		
				Terminal Samples		X		
	Setup	Fixing. Ref.▼		Wire Samples		X		
POSITIVE CAM (Terminal present)	X	C		Housing Samples				
NEGATIVE CAM (Terminal absent)				Seal Samples		X		7157-3345-40
		Fixing. Ref.▲		Applicounter			No	
				Mobile Ejector			No	
				Carrier strip to be cut			Yes	

FEEDING POINT OF THE TERMINAL				
Hole	Slot	Wire wing	Insulation wing	Other
X				

	Crimp Height	Pull Force	Section	Photo
C				
M				
K			0,50	X

Automatic machine			
Setup on	Mod.	S/N	Strip length = 4,00 (mm)
Press	P107C	42877	
Stripper			



CRIMPING

WIRE	INSULATION	BARREL
 F	 C	
Profile dimension	Profile dimension	Profile dimension
Wire C. Profile Width (mm.) 1,78 (toll. +) 0,02	Insulation C. Profile Width (mm.) 3,38 (toll. +) 0,02	Barrel C. Profile Width (mm.) (toll. +)


WIRE CHARACTERISTICS — CRIMPING DIMENSIONS (mm.)

SECTION	COMPOSITION		Insulation	CONDUCTOR				INSULATION				BARREL				Pull Force	Crimp Force
					Required HEIGHT ±	Required WIDTH ±	Measured WIDTH		Required HEIGHT ±	Required WIDTH ±	Measured WIDTH	Required HEIGHT ±	Required WIDTH ±	Measured WIDTH			
mm²	Nb	Ø	Ø	Index Wire	0,05			Index Insulation	0,10							Toll. ± 2 % (N.)	C.F.A. (KN.)
0,88 Sez. reale																	
0,85 CAVS	11	0,32	1,80	1,86	1,20		1,82	1,42	3,40		3,39					170	2,99
0,48 Sez. reale																	
0,50 FLRY-A	19	0,18	1,50	1,92	1,13		1,81	1,64	3,10		3,35					85	2,68

CHECK



Description		Rif.	Test
Bent left or right (max)	3°	A	OK
Bent up or down (max)	3°	B	OK
Torsion (max)	3°	C	OK



Description		Rif.	Test
Bellmouth	0,2~0,6	D	OK
Cut-off (max)	0,3	E	OK
Wire overlay	0,1~0,6	F	OK


DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
6/6/2017	*Amarotto*	*Toniato*	*Zatti*

N.B.: MECAL affirms that the MECAL tool is in accordance with the above mentioned characteristics

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

YAZAKI SALTANO DE OVAR, P.E. LDA | **WIRE** | **RSY3364-JGE1_M** | **84000**

	Terminal
	7116-4916-06
Wire Section.	0,50
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

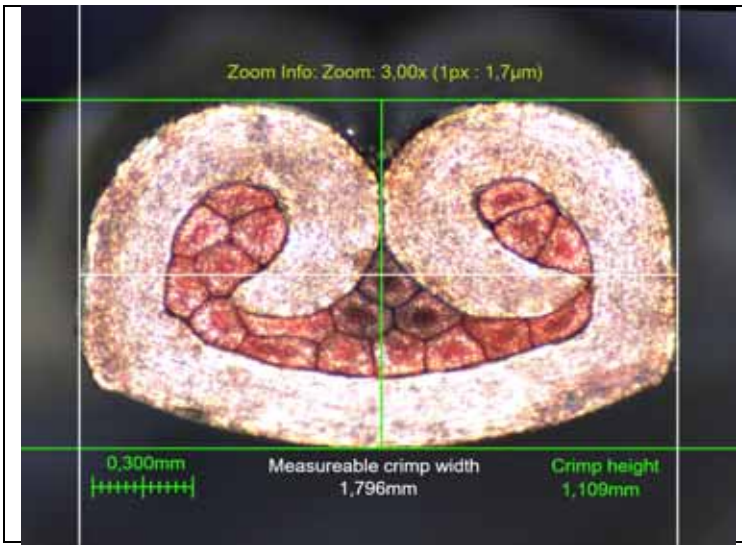

	Terminal
	7116-4916-06
Wire Section.	0,50
CH. (mm.)	1,13
C.W. (mm.)	1,81
Material Compression (%)	9,2
Wire Compression	
Terminal Compression	

	Terminal
	7116-4916-06
Wire Section.	0,50
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
6/6/2017	*Amarotto*	*Toniato*	*Zatti*

MECAL

DISTINTA COMPONENTI - PARTS LIST - BESTANDTEILELIST

DATA 06/06/2017

MODELLO
MODEL **RSY3364-JGE1_M**
TYPE
MODELE

TERMINALE
TERMINAL **7116-4916-06**
KONTAKT
COSSE

MATRICOLA
SERIAL NU **L 84000**
REGISTRIERNUMMER
MATRICULE

CODICE	Qt.	Rif
870550004	1	110
601051006	2	130
600052010	1	150
911190000	1	160
911070012	1	170
650231018	1	180
630104106	1	190
990270004	1	200
991320002	1	210
600041106	1	220
991280007	1	230
991320001	1	240
610111308	1	250
911110013	1	260
991300008	1	280
870620001	1	295
880480008	1	300
871980007	1	310
990400003	1	315
600061016	2	360
601058012	1	370
600050010	1	380
640060020	2	390
991290010	1	400
991290016	1	405
600050014	4	410
640050020	1	420
600041008	1	450
650242004	2	460
991350000	1	480
600050016	2	490
600050010	1	500
991590000	1	510
911010006	1	520
991340002	1	530
991330003	1	540
991310000	1	560
640050020	1	570
600052010	1	580
911090007	1	590


CODICE	Qt.	Rif
95127 0207	1	001
60006 0040	1	005
91112 0035	1	100
99101 0039	1	120
95127 0069	1	140
99157 0000	1	142
99058 0000	1	143
91103 0045	1	290
91117 0047	1	320
91117 0042	1	341
91118 0028	1	342
99017 0019	1	343
91125 0074	1	350
88146 0018	1	355
88146 0019	1	362
60004 0008	4	365
91106 0000	1	430
91105 0018	1	440
99017 0000	1	470
91102 0001	1	550
91108 0050	1	600
91011 0000	2	610
91124 0228	1	620
60004 0012	1	621
99126 0028	1	622
91116 0027	1	623
91122 0000	1	630
60003 0006	2	640
91148 0360	1	650
91148 0385	1	655
63010 4104	2	665
60004 1012	2	660
Personal. **L_H112-Y**		
98146 0485	**1**	**1000**
98145 0446	**1**	**1010**
99951 0380	1	1030
91130 0334	1	1040
99059 0005	1	1045
99155 0119	1	1050
60008 1025	1	1055
60004 0010	1	1058
98127 0614	**1**	**1060**
91134 0106	**1**	**1070**
91133 0174	**1**	**1075**
91035 0002	1	1080
20108 0061	1	1082
60003 0008	1	1085
60004 0016	2	1090
60003 0006	1	1093
91145 0025	1	1095
91141 0329	1	1096
60004 0010	1	1097
62104 0010	1	1098
60004 0016	2	1100
91143 0007	1	1105
64002 0008	1	1110
91042 0000	1	1115
91145 0001	1	1120
91146 0001	1	1125
60004 0016	1	1130


REV	DATE	DESCRIPTION	REQUIRED	FITMENT


Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069


L_BLK00-RY


ATTENZIONE: la protezione in gomma (rif. 295) tra le ghiere ed il corpo del miniapplicatore deve essere rimossa prima dell' utilizzo dell' attrezzo.
ATTENTION: the rubber protection (ref. 295) between the ram and the applicator it must be removed before using.

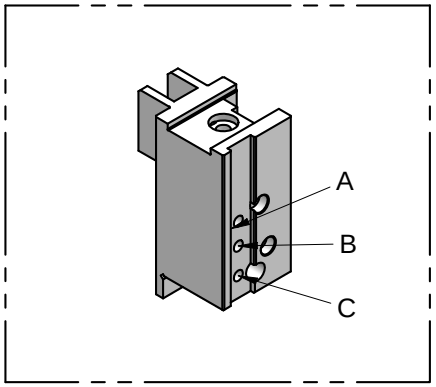


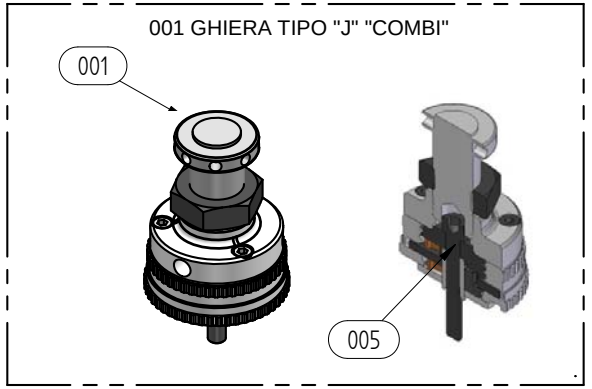





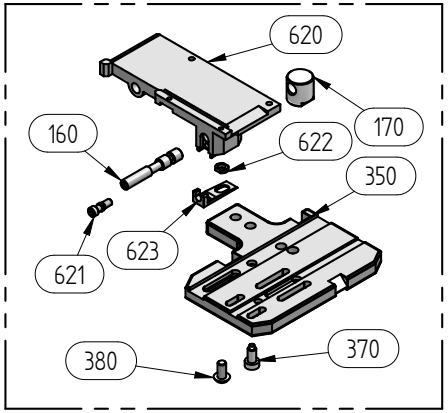



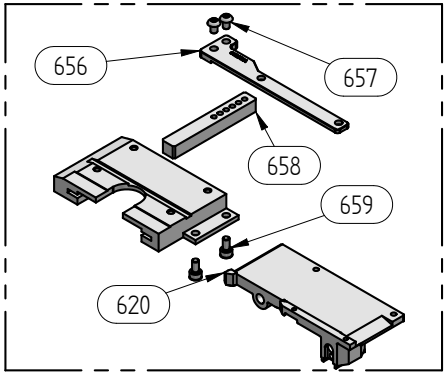




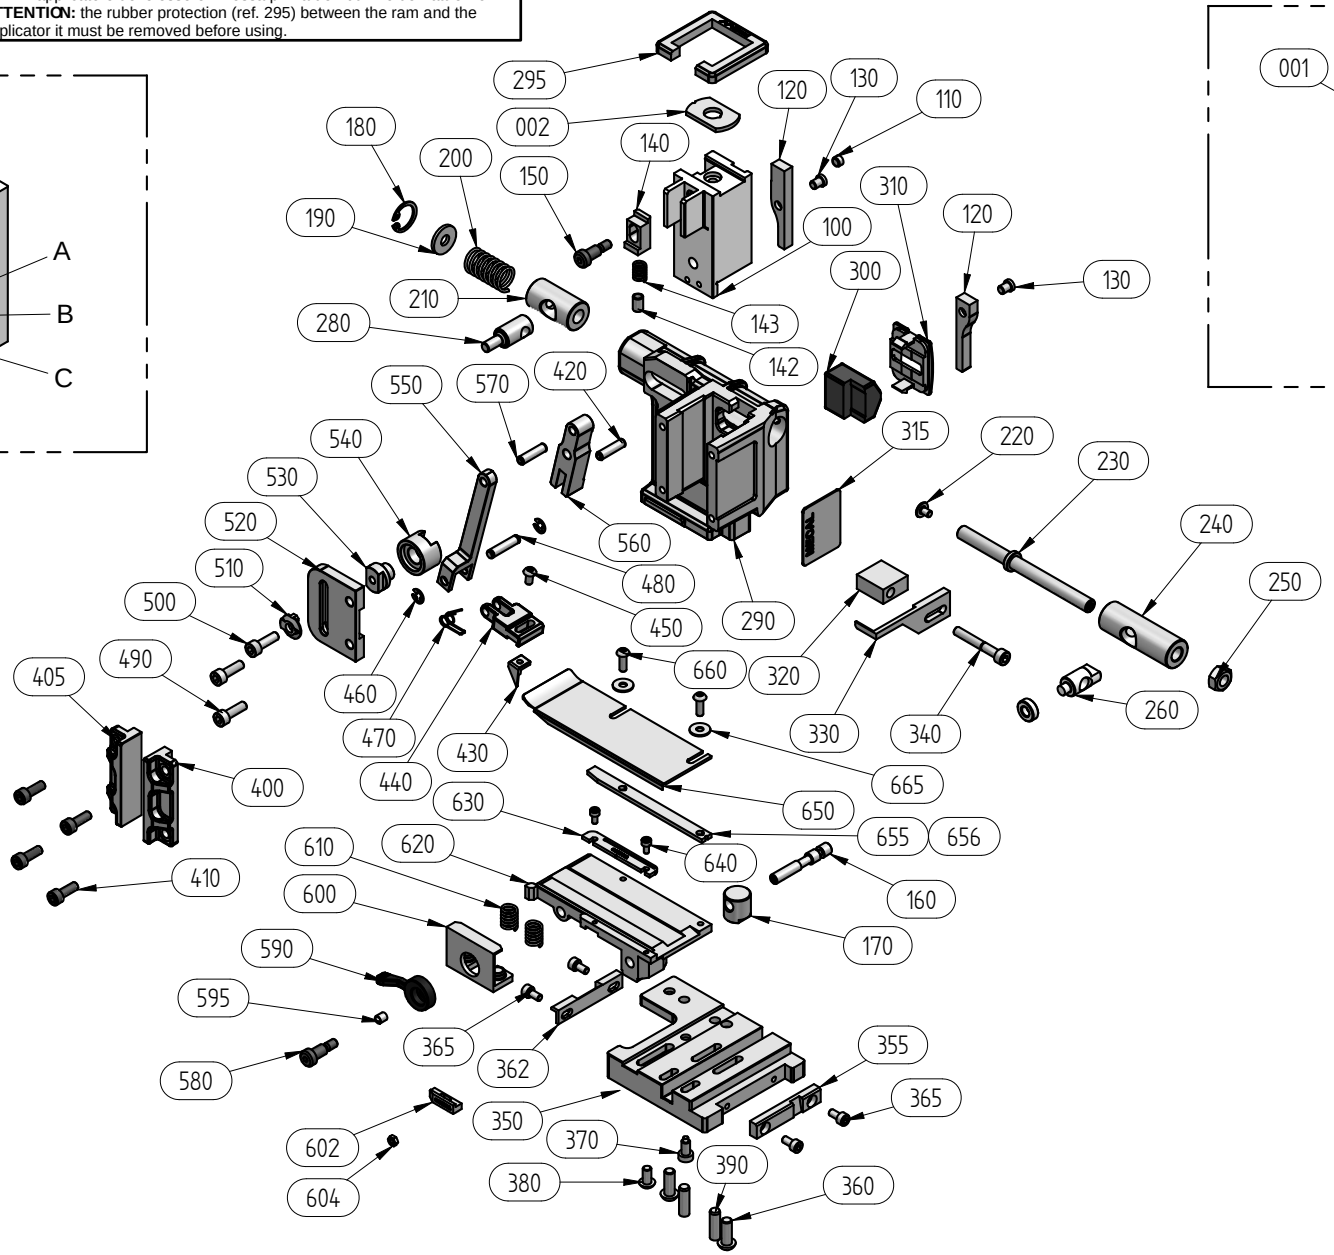

Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069

L_H112-Y

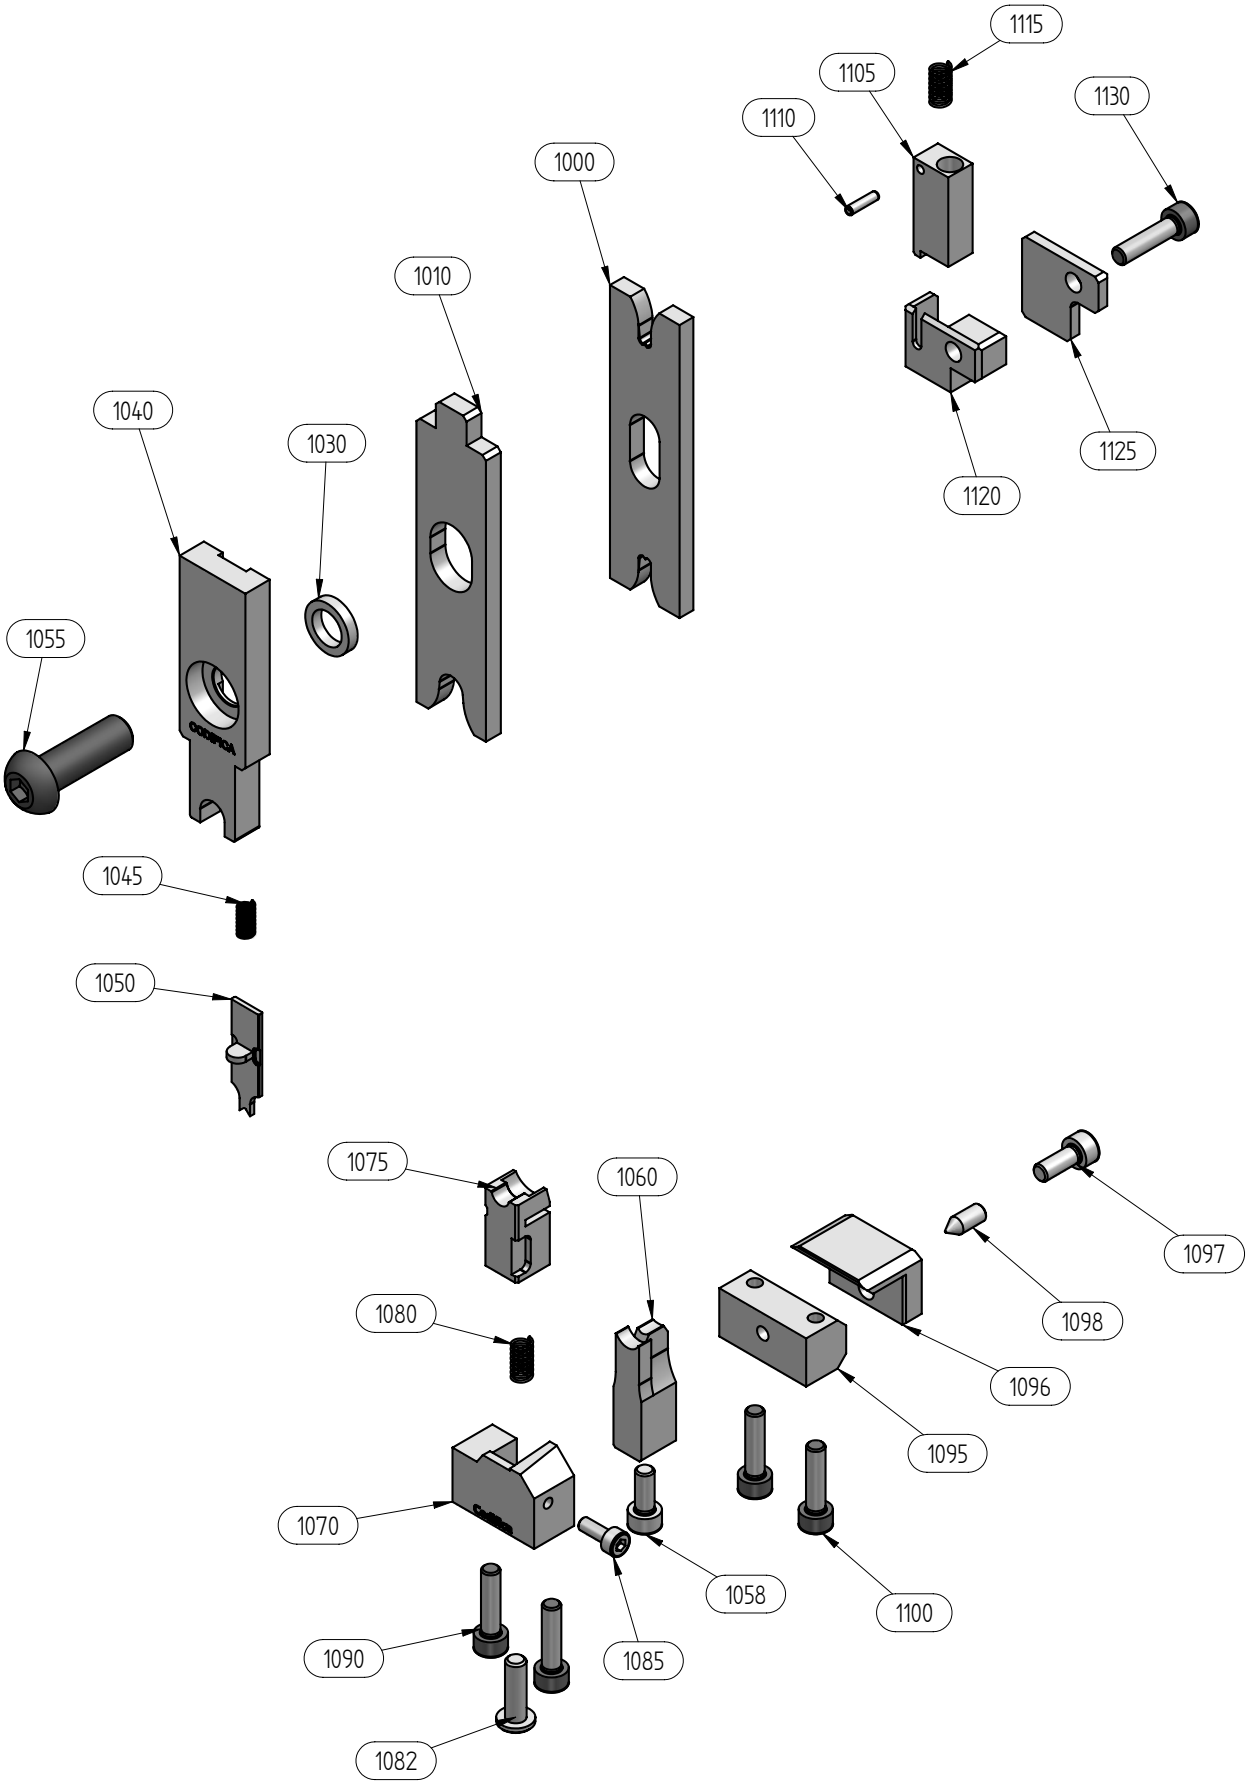

Dichiarazione di incorporazione
Declaration of incorporation

(All. IIB Dir. 2006/42/CE)

Il fabbricante
The manufacturer

Mecal s.r.l. Strada per Felizzano, 18
15043 Fubine (AL) Italia

dichiara
declares

(seguendo la procedura di valutazione della conformità secondo Art.13 Dir. 2006/42/CE)

che la quasi macchina
the partly completed machinery

Miniapplicatore - Stampo Mod. RSY3364-JGE1_M Matr. L84000 anno 2017

Applicatore e stampo per l'aggraffatura di terminali metallici su cavi conduttori

Applica e rispetta i requisiti essenziali di sicurezza
1.1.1 – 1.1.3 –1.3.4 della direttiva 2006/42/CE all I
e la documentazione tecnica pertinente è stata compilata in conformità allegato VIIB

It applies and fulfill the essential safety requirements 1.1.1 - 1.1.3 - 1.3.4 - of Directive 2006/42/CE annex 1 and the related technical documentation has been compiled in accordance with part B of annex VII

Ci impegniamo a trasmettere, in risposta da una richiesta adeguatamente motivata delle autorità nazionali, informazioni pertinenti su miniapplicatori / stampi (quasi macchine) in formato digitalizzato

Si dichiara il divieto della messa in servizio di tutti gli applicatori e stampi MECAL definiti "quasi macchine" prima che le macchine sulle quali vengono incorporate siano state dichiarate conformi alle disposizioni della direttiva 2006/42/CE

It is expressely prohibited to put in use all MECAL applicator - defined "partly completed machines" before that the machines hosting the mentioned Mecal applicators are confirmed in compliance with Directive 2006/42/CE

e autorizza
and authorizes

Luigi Aluffo - Str. Per Felizzano,18, 15043 Fubine (AL) Italia

a costituire il fascicolo tecnico
to compile the technical file

luogo e data 06/06/2017
place and date

Fubine

Mecal s.r.l.
Aluffo Luigi
presidente
president