PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

# APPLICATOR VALIDATION REPORT

**(Spec. YEL-RP-02-0004)**

| Applicator Serial Nº |
|---|
| L86964 |

***TOOLS MANAGEMENT INFORMATION --->*** ***TOOL Nº 7114-3804 G1*** ***SEQUENCE Nº*** 9







| Validation Terminal Nº | Accessory | Applicator Type | Purchasing Order Nº | Project / Model |
|---|---|---|---|---|
| **7114-3804-02** | * | **RSYP 5594-J_M** | **YSD 4514155674** | **/ILER TRUCK BEV** |

**Applicable Terminals for this Tool:**

| | | | | |
|---|---|---|---|---|
| **7114-3804-02** | | | | |

| Anvil | | | Wire Crimper | | | Insulation Crimper | | |
|---|---|---|---|---|---|---|---|---|
| 7114-3804-00CANCAPM | | (N) | 7114-3804-00CWM | | (N) | 7114-3804-00CIM | | (N) |
| *CW (c)* | 4,98 | *CW (i)* 6,79 | *CW* | 4,96 | | *CW* | 6,79 | |

## 1 - VISUAL / MEASURED CHECK ITEMS

| | | | Spec. (*) | Value (**) | O - ok X - ng NA - not aplicable | | |
|---|---|---|---|---|---|---|---|
|  | The two sides of the insulation grips are in the correct position. | O | 0.00~0.60mm<br>0.40~1.20mm | 0.46<br>0.71 |  | The Bell Mouth is within the spec.**(*)** | O |
|  | Not found any Bell Mouth in the insulation area. | O | 0.00~0.50mm | 0.48 |  | The dimension of the cutting carrier is within the spec.**(*)** | O |
|  | The lance height and shape are not deformed. | O | 0.00~0.30mm<br>0.00~0.30mm | --<br>0.11 |  | Bend up and Bend down are within the criteria**(*)** | O |
|  | Not found any burr in the cutting carrier. | O | 0.10~1.50mm | 0.91 |  | The exposed conductor is within the spec.(*) | O |
|  | Not found any crack in the terminal. | O | 5º | 2.4 |  | The terminal is not bent sideway, look-king from the top**(*)** | O |
|  | The wire barrel is free from major burrs. | O | 0.00~0.80mm | 0.05 |  | The body of the terminal is not twisted**(*)** | O |


**(*)** - Specified on Crimping Spec.

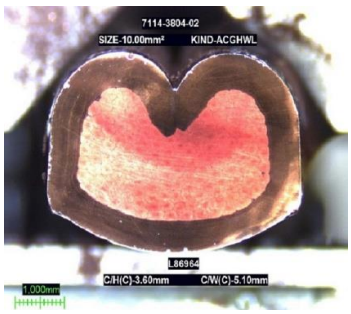
**(**)** - Measured Value(From Lower Wire Kind&Size Sample)

**LOWER** WIRE KIND & SIZE

**UPPER** WIRE KIND & SIZE

## 2 - MICRO CUT SAMPLES




## 3 - CRIMPING HEIGHT STABILITY

| | NOMINAL | AVERAGE | Cmk |
|---|---|---|---|
| mm | 2,98 | 2,98 | 3,28 |
| | +/-0.05 | | |

| | NOMINAL | AVERAGE | Cmk |
|---|---|---|---|
| mm | 3,6 | 3,60 | 3,19 |
| | +/-0.05 | | |

**REMARKS:**

Aplicable wire range 6.00mm²~10.00mm²
Wire size 6.00mm² C/W(I)-7.01mm
Wire size 10.00mm² C/W(I)-7.10mm

**EVALUATION DECISION**

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

| APPROVED (Section Chief) 3485 | CHECKED (Operator) 44 | PREPARED (Operator) nº 19147 |
|---|---|---|
| Date: 2025/fev/12 | Date: 2025/fev/12 | Date: 2025/fev/10 |

YAZAKI
PORTO TECHNICAL CENTRE

# APPLICATOR VALIDATION REPORT

| Applicator Serial Nº |
|---|
| L86964 |

## LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 6 mm²

| | | | |
|---|---|---|---|
| Nominal Cr. Height: | 2,98 | 6,1 | mm |
| +/- | 0,05 | 0,1 | mm |

| Sample number | Crimp height WIRE (mm) | Crimp height INSULATION (mm) |
|---|---|---|
| 1 | 2,987 | 6,104 |
| 2 | 2,987 | 6,104 |
| 3 | 2,981 | 6,103 |
| 4 | 2,978 | 6,100 |
| 5 | 2,982 | 6,098 |
| 6 | 2,983 | 6,098 |
| 7 | 2,984 | 6,097 |
| 8 | 2,985 | 6,104 |
| 9 | 2,986 | 6,106 |
| 10 | 2,990 | 6,107 |
| 11 | 2,990 | 6,103 |
| 12 | 2,991 | 6,113 |
| 13 | 2,984 | 6,103 |
| 14 | 2,984 | 6,106 |
| 15 | 2,982 | 6,105 |
| 16 | 2,980 | 6,102 |
| 17 | 2,980 | 6,102 |
| 18 | 2,977 | 6,100 |
| 19 | 2,977 | 6,095 |
| 20 | 2,979 | 6,092 |
| 21 | 2,981 | 6,091 |
| 22 | 2,984 | 6,101 |
| 23 | 2,986 | 6,105 |
| 24 | 2,989 | 6,107 |
| 25 | 2,992 | 6,108 |
| 26 | 2,990 | 6,110 |
| 27 | 2,983 | 6,112 |
| 28 | 2,978 | 6,104 |
| 29 | 2,971 | 6,098 |
| 30 | 2,970 | 6,095 |
| 31 | 2,973 | 6,092 |
| 32 | 2,977 | 6,088 |
| 33 | 2,982 | 6,087 |
| 34 | 2,983 | 6,086 |
| 35 | 2,985 | 6,089 |
| 36 | 2,986 | 6,095 |
| 37 | 2,987 | 6,098 |
| 38 | 2,981 | 6,099 |
| 39 | 2,979 | 6,101 |
| 40 | 2,979 | 6,102 |
| 41 | 2,979 | 6,103 |
| 42 | 2,981 | 6,104 |
| 43 | 2,984 | 6,105 |
| 44 | 2,985 | 6,106 |
| 45 | 2,986 | 6,107 |
| 46 | 2,987 | 6,102 |
| 47 | 2,984 | 6,102 |
| 48 | 2,981 | 6,102 |
| 49 | 2,980 | 6,102 |
| 50 | 2,979 | 6,101 |
| Average | 2,98 | 6,10 |
| Cmk | 3,28 | 5,37 |

## UPPER WIRE KIND & SIZE

Wire kind: ACGHWL

Wire size: 10 mm²

| | | | |
|---|---|---|---|
| Nominal Cr. Height: | 3,6 | 6,6 | mm |
| +/- | 0,05 | 0,1 | mm |

| Sample number | Crimp height WIRE (mm) | Crimp height INSULATION (mm) |
|---|---|---|
| 1 | 3,601 | 6,603 |
| 2 | 3,600 | 6,606 |
| 3 | 3,596 | 6,610 |
| 4 | 3,596 | 6,612 |
| 5 | 3,593 | 6,603 |
| 6 | 3,597 | 6,600 |
| 7 | 3,597 | 6,596 |
| 8 | 3,602 | 6,596 |
| 9 | 3,604 | 6,595 |
| 10 | 3,603 | 6,598 |
| 11 | 3,601 | 6,602 |
| 12 | 3,599 | 6,604 |
| 13 | 3,598 | 6,606 |
| 14 | 3,594 | 6,606 |
| 15 | 3,599 | 6,601 |
| 16 | 3,603 | 6,599 |
| 17 | 3,605 | 6,592 |
| 18 | 3,606 | 6,592 |
| 19 | 3,603 | 6,600 |
| 20 | 3,603 | 6,601 |
| 21 | 3,614 | 6,607 |
| 22 | 3,608 | 6,607 |
| 23 | 3,606 | 6,608 |
| 24 | 3,604 | 6,607 |
| 25 | 3,604 | 6,600 |
| 26 | 3,609 | 6,596 |
| 27 | 3,603 | 6,595 |
| 28 | 3,602 | 6,599 |
| 29 | 3,602 | 6,599 |
| 30 | 3,602 | 6,598 |
| 31 | 3,608 | 6,600 |
| 32 | 3,605 | 6,605 |
| 33 | 3,604 | 6,607 |
| 34 | 3,600 | 6,610 |
| 35 | 3,599 | 6,616 |
| 36 | 3,595 | 6,618 |
| 37 | 3,593 | 6,616 |
| 38 | 3,598 | 6,607 |
| 39 | 3,601 | 6,607 |
| 40 | 3,603 | 6,606 |
| 41 | 3,603 | 6,606 |
| 42 | 3,605 | 6,604 |
| 43 | 3,606 | 6,602 |
| 44 | 3,607 | 6,606 |
| 45 | 3,610 | 6,608 |
| 46 | 3,612 | 6,609 |
| 47 | 3,612 | 6,610 |
| 48 | 3,611 | 6,599 |
| 49 | 3,606 | 6,599 |
| 50 | 3,604 | 6,611 |
| Average | 3,60 | 6,60 |
| Cmk | 3,19 | 5,35 |

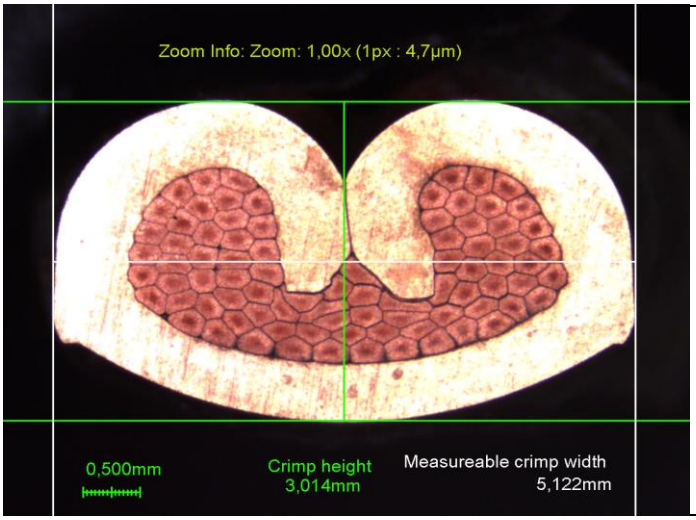
**Acceptance criteria: Cmk>= 2,0**

**END**

# QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

YAZAKI SALTANO DE OVAR P.E. LDA | **WIRE** | **RSYP5594-J_M** | **086964**

| | Terminal |
|---|---|
| | 7114-3804-02 |
| Wire Section. | 6,00 |
| CH. ( mm. ) | |
| C.W. ( mm. ) | |
| Material Compression (%) | |
| Wire Compression | |
| Terminal Compression | |




| | Terminal |
|---|---|
| | 7114-3804-02 |
| Wire Section. | 6,00 |
| CH. ( mm. ) | 2,98 |
| C.W. ( mm. ) | 5,04 |
| Material Compression (%) | 20,0 |
| Wire Compression | |
| Terminal Compression | |

| | Terminal |
|---|---|
| | 7114-3804-02 |
| Wire Section. | 6,00 |
| CH. ( mm. ) | |
| C.W. ( mm. ) | |
| Material Compression (%) | |
| Wire Compression | |
| Terminal Compression | |

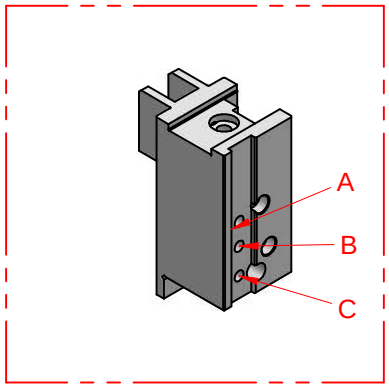
| DATE | OPERATOR SIGNATURE | CONTROLLER SIGNATURE | QUALITY RESPONSIBLE |
|---|---|---|---|
| 24/1/2025 | *Valinotto* | *P.Bruno* | *Zatti* |


| REV | DATE | DESCRIPTION | REQUIRED | FITMENT |
|---|---|---|---|---|
| 01 | 16/12/2024 | RSYP3852-JGB1 | YAZAKI | |
| 01 | 16/12/2024 | RSYP5594-J_M | YAZAKI | |
| | | | | |
| | | | | |
| | | |


**Mecal Srl**
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069


# L_BLK00-RYP


**ATTENZIONE:** la protezione in gomma (rif. 295) tra le ghiere ed il corpo del miniapplicatore deve essere rimossa prima dell' utilizzo dell' attrezzo.
**ATTENTION:** the rubber protection (ref. 295) between the ram and the applicator it must be removed before using.

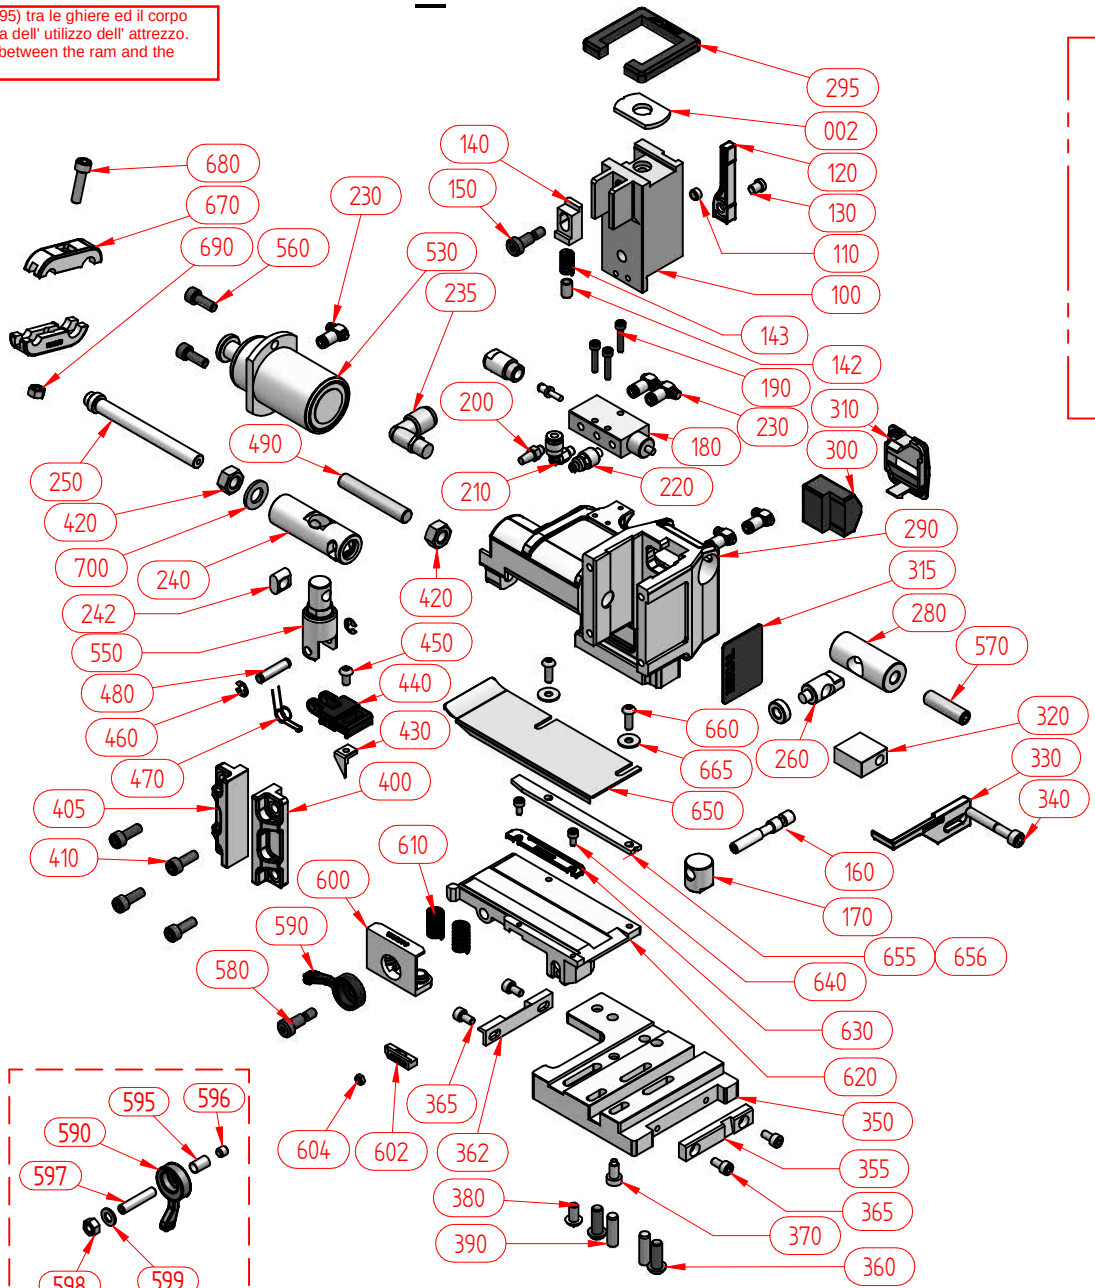


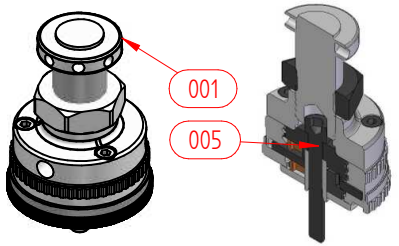



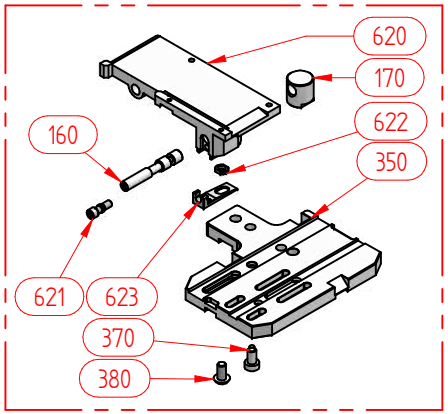



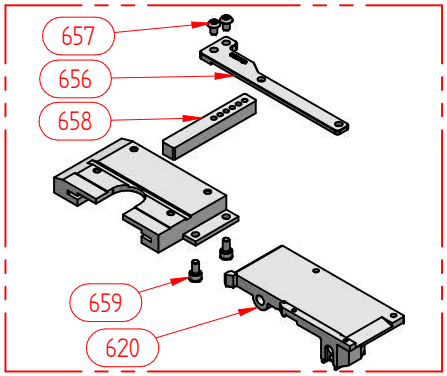




001 GHIERA TIPO "J" "COMBI"



# Dichiarazione di incorporazione
# Declaration of incorporation

(All. IIB Dir. 2006/42/CE)

## Il fabbricante
***The manufacturer***

Mecal s.r.l. Strada per Felizzano, 18
15043 Fubine (AL) Italia

## dichiara
***declares***

(seguendo la procedura di valutazione della conformità secondo Art.13 Dir. 2006/42/CE)

## che la quasi macchina
***the partly completed machinery***

Miniapplicatore - Stampo Mod. RSYP5594-J_M Matr. L086964 anno 2025

Applicatore e stampo per l'aggraffatura di terminali metallici su cavi conduttori

**Applica e rispetta i requisiti essenziali di sicurezza**
**1.1.1 – 1.1.3 –1.3.4 della direttiva 2006/42/CE all I**
**e la documentazione tecnica pertinente è stata compilata in conformità allegato VIIB**

***It applies and fulfill the essential safety requirements 1.1.1 - 1.1.3 - 1.3.4 - of Directive 2006/42/CE annex 1 and the related technical documentation has been compiled in accordance with part B of annex VII***

Ci impegniamo a trasmettere, in risposta da una richiesta adeguatamente motivata delle autorità nazionali, informazioni pertinenti su miniapplicatori / stampi (quasi macchine) in formato digitalizzato

**Si dichiara il divieto della messa in servizio di tutti gli applicatori e stampi MECAL definiti "quasi macchine" prima che le macchine sulle quali vengono incorporate siano state dichiarate conformi alle disposizioni della direttiva 2006/42/CE**

***It is expressely prohibited to put in use all MECAL applicator - defined "partly completed machines" before that the machines hosting the mentioned Mecal applicators are confirmed in compliance with Directive 2006/42/CE***

## e autorizza
***and authorizes***

Claudio Aluffo - Str. Per Felizzano,18, 15043 Fubine (AL) Italia

## a costituire il fascicolo tecnico
***to compile the technical file***

luogo e data 24/01/2025
*place and date*

Fubine

Mecal s.r.l.
Claudio Aluffo

