APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E266

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71146478 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7114-6478-06	**7157-3036-60**	**04 SIDE FEED**	**YSD_2018_001~008**	*







Anvil		
7114-6478ZZXAD		(N)
CW (c) 1,42	*CW (i)* 3,18	





Wire Crimper		
7114-6478ZZXW		(N)
CW 1,40		

Insulation Crimper		
7114-6478ZZXID		(N)
CW 3,18		

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

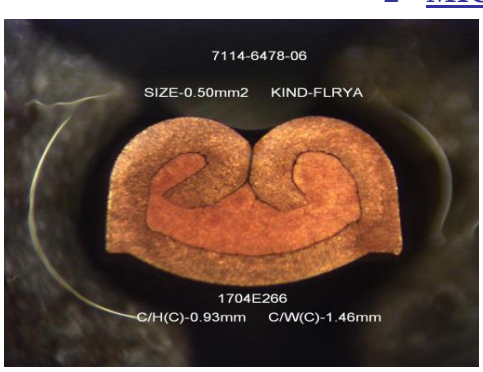
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

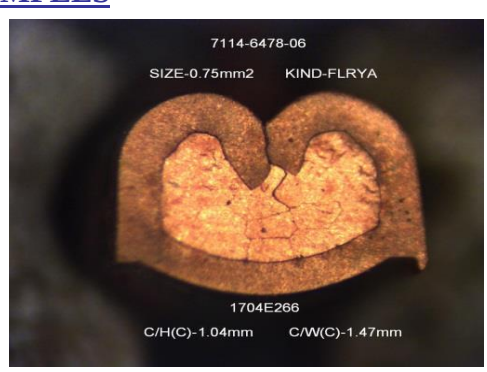
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0,93	0,93	4,82
	+/-0,03		



	NOMINAL	AVERAGE	Cmk
mm	1,05	1,05	3,65
	+/-0,03		

REMARKS:

Aplicable wire range-0.50~0.75mm2
Size 0.50mm2 C/W(I)-3.13mm
Size 0.75mm2 C/W(I)-3.18mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
		
Date: 2018-abr-05	Date: 2018-abr-03	Date: 2018-abr-02

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E266

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,5 mm^2

Nominal Cr. Height:	0,93	3,05	mm
+/-	0,03	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	0,933	3,053
2	0,937	3,049
3	0,934	3,044
4	0,932	3,048
5	0,933	3,051
6	0,937	3,053
7	0,935	3,049
8	0,932	3,045
9	0,933	3,046
10	0,936	3,049
11	0,935	3,053
12	0,932	3,050
13	0,933	3,046
14	0,936	3,049
15	0,934	3,053
16	0,931	3,055
17	0,932	3,052
18	0,935	3,047
19	0,934	3,048
20	0,932	3,052
21	0,931	3,050
22	0,932	3,048
23	0,933	3,050
24	0,932	3,053
25	0,930	3,052
26	0,931	3,049
27	0,933	3,051
28	0,933	3,053
29	0,930	3,055
30	0,931	3,053
31	0,933	3,050
32	0,932	3,052
33	0,930	3,054
34	0,931	3,052
35	0,932	3,044
36	0,931	3,041
37	0,930	3,044
38	0,931	3,041
39	0,933	3,048
40	0,932	3,046
41	0,929	3,050
42	0,931	3,052
43	0,933	3,051
44	0,931	3,048
45	0,929	3,050
46	0,930	3,052
47	0,932	3,050
48	0,934	3,048
49	0,931	3,050
50	0,934	3,053
Average	0,93	3,05
Cmk	4,82	9,97

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,75 mm^2

Nominal Cr. Height:	1,05	3,15	mm
+/-	0,03	0,1	mm

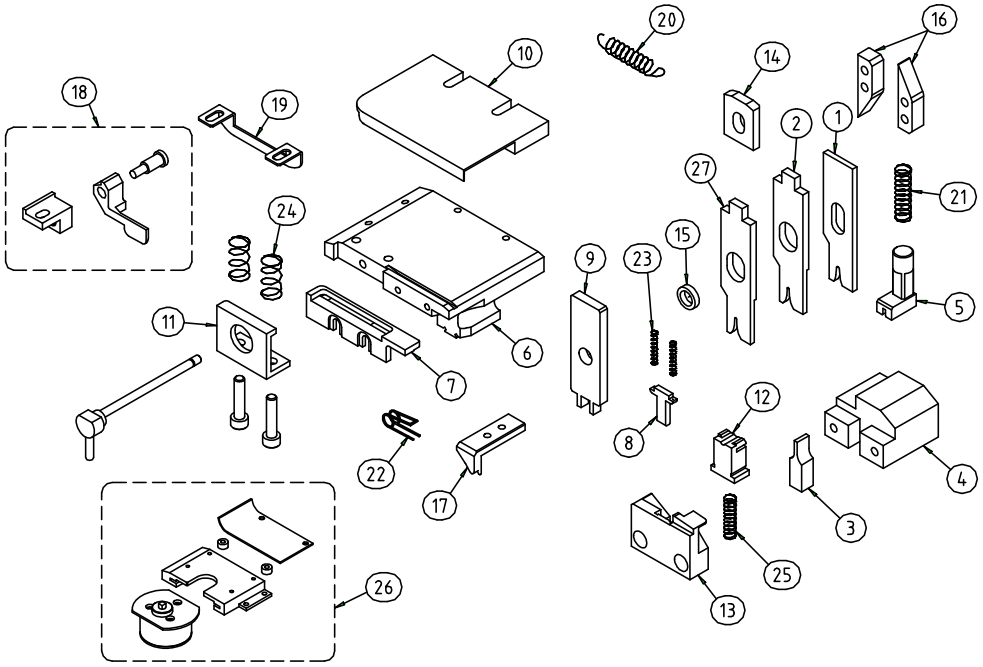
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,054	3,146
2	1,058	3,152
3	1,056	3,154
4	1,053	3,151
5	1,054	3,146
6	1,056	3,148
7	1,059	3,151
8	1,056	3,148
9	1,054	3,143
10	1,055	3,146
11	1,056	3,150
12	1,054	3,152
13	1,052	3,148
14	1,053	3,150
15	1,054	3,152
16	1,053	3,149
17	1,051	3,143
18	1,052	3,147
19	1,054	3,151
20	1,053	3,153
21	1,051	3,150
22	1,051	3,146
23	1,053	3,148
24	1,051	3,150
25	1,050	3,152
26	1,051	3,150
27	1,052	3,146
28	1,051	3,147
29	1,050	3,149
30	1,051	3,148
31	1,052	3,150
32	1,051	3,152
33	1,049	3,151
34	1,050	3,149
35	1,052	3,150
36	1,052	3,152
37	1,049	3,151
38	1,051	3,147
39	1,053	3,149
40	1,049	3,151
41	1,047	3,149
42	1,048	3,145
43	1,050	3,148
44	1,052	3,150
45	1,051	3,146
46	1,048	3,141
47	1,050	3,138
48	1,052	3,143
49	1,051	3,141
50	1,048	3,146
Average	1,05	3,15
Cmk	3,65	9,72

Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	ZZ	TERMINAL No. 端子品番	7114-6478 DD
共通品番	– / –	– / –	– / –



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7114-6478ZZXW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7114-6478ZZXID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7114-6478ZZXAD		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7114-6478XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7114-6478XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7114-6478XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7114-6478XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7114-6478XKP		BRACKET ブラケット
12	48A19049	001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27	~~7114-6478XQ~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	002	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	022	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	023	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					YTU		
					DESIGNED DATE 設計日		
					04-01-2017		
					APPROVED 承認	DESIGNED 設計	
					S.Junior	C.F.Almeida	
					04-01-2017	04-01-2017	