PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E283

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71143342 SEQUENCE Nº 2

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7114-3342-02	*	**04 SIDE FEED**	**YSD-PO 25ENG/2017**	*






Anvil		
7114-3342XA		(N)
CW (c) 2.05	*CW (i)* 2.54	





Wire Crimper	
7114-3342XW	(1)
CW 2.03	

Insulation Crimper	
7114-3342XI	(1)
CW 2.54	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

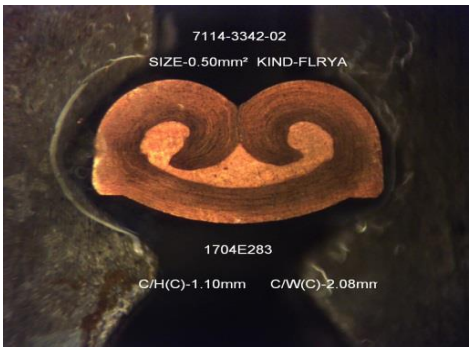
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.1	1.11	2.66
	+/-0.05		


	NOMINAL	AVERAGE	Cmk
mm	1.35	1.35	2.68
	+/-0.05		

REMARKS:

Aplicable wire range-0.50mm²~1.00mm².
Wire 0.50mm² C/W(I)-2.36mm
Wire 1.00mm² C/W(I)-2.53mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
		
Date: 2017-abr-27	Date: 2017-abr-27	Date: 2017-abr-27

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E283

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0.5 mm^2

Nominal Cr. Height:	1.1	1.9	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.117	1.918
2	1.108	1.909
3	1.111	1.900
4	1.121	1.908
5	1.112	1.917
6	1.102	1.917
7	1.118	1.904
8	1.104	1.907
9	1.102	1.923
10	1.116	1.912
11	1.110	1.903
12	1.108	1.898
13	1.119	1.909
14	1.112	1.907
15	1.108	1.898
16	1.110	1.918
17	1.104	1.899
18	1.107	1.910
19	1.106	1.908
20	1.104	1.912
21	1.111	1.901
22	1.106	1.905
23	1.112	1.915
24	1.113	1.898
25	1.107	1.907
26	1.112	1.909
27	1.104	1.895
28	1.115	1.913
29	1.106	1.913
30	1.114	1.897
31	1.115	1.912
32	1.108	1.898
33	1.106	1.909
34	1.115	1.901
35	1.105	1.897
36	1.114	1.910
37	1.107	1.914
38	1.110	1.896
39	1.109	1.911
40	1.106	1.897
41	1.117	1.910
42	1.105	1.897
43	1.117	1.913
44	1.112	1.900
45	1.114	1.899
46	1.106	1.917
47	1.103	1.901
48	1.099	1.905
49	1.105	1.898
50	1.111	1.913
Average	1.11	1.91
Cmk	2.66	4.26

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1.35	2.4	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.354	2.405
2	1.359	2.416
3	1.354	2.421
4	1.347	2.399
5	1.351	2.398
6	1.357	2.400
7	1.349	2.396
8	1.355	2.394
9	1.342	2.407
10	1.357	2.415
11	1.361	2.406
12	1.349	2.402
13	1.361	2.419
14	1.352	2.401
15	1.356	2.414
16	1.346	2.397
17	1.362	2.406
18	1.348	2.419
19	1.346	2.401
20	1.358	2.421
21	1.344	2.402
22	1.360	2.400
23	1.348	2.414
24	1.347	2.408
25	1.356	2.414
26	1.346	2.416
27	1.341	2.401
28	1.358	2.403
29	1.348	2.405
30	1.358	2.411
31	1.351	2.410
32	1.350	2.414
33	1.358	2.401
34	1.349	2.410
35	1.348	2.415
36	1.359	2.408
37	1.347	2.416
38	1.351	2.418
39	1.353	2.400
40	1.345	2.409
41	1.357	2.397
42	1.357	2.402
43	1.346	2.421
44	1.359	2.406
45	1.349	2.405
46	1.352	2.422
47	1.343	2.400
48	1.339	2.413
49	1.359	2.396
50	1.346	2.412
Average	1.35	2.41
Cmk	2.68	3.89

Acceptance criteria: Cmk>= 2

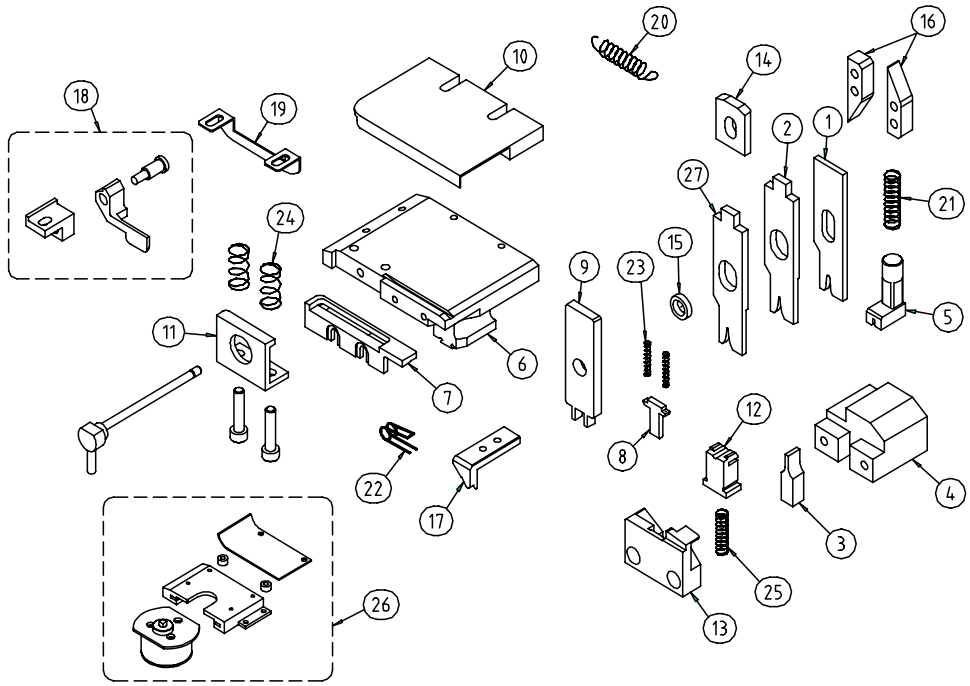
Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-4292	TERMINAL No. 端子品番	7114-3342

Common PN 共通品番	-	-	-	-
	-	-		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7114-3342XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7114-3342XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7114-3342XA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7114-3342XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7114-3342XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7114-3342XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7114-3342XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7114-3342XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	7114-3342XS ①		SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	7114-3342XP-A ①		OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	<OPTION ｵﾌﾟｼｮﾝ>			
14	48A19007	026 ②	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	7114-3342XP-B ①		OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	030	BUSH ﾌﾞｯｼｭ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPROVED 承認	DESIGNED 設計
②	2008/6/2	037→026	QX7	C,Sato		
①	2008/1/18	専用化 Making to exclusive use	08A-028	T,Suzuki	T,Maki	T,Suzuki
					2007/8/20	2007/8/20

APPRICATION POST 申請部署: HIB

DESIGNED DATE 設計日: 2007/8/20

ISSUED '11.11.18 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED 発行