PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE



# APPLICATOR VALIDATION REPORT

**(Spec. YEL-RP-02-0004)**

| Applicator Serial Nº |
|---|
| 1704E296 |







***TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164156 SEQUENCE Nº*** 9





| Terminal Nº | Rubber Seal | Applicator Type | Purchasing Order Nº | Project / Model |
|---|---|---|---|---|
| **7116-4156-02** | * | **04 SIDE FEED** | **YSD-PO 25ENG/2017** | * |

| Anvil | | | Wire Crimper | | | Insulation Crimper | | |
|---|---|---|---|---|---|---|---|---|
| 7116-4156XA | | (A) | 7116-4156XW | | (A) | 7116-4156XI | | (A) |
| *CW (c)* | 2.52 | *CW (i)* 3.60 | *CW* | 2.50 | | *CW* | 3.60 | |

## 1 - VISUAL CHECK ITEMS

**O** - ok **X** - ng **NA** - not aplicable

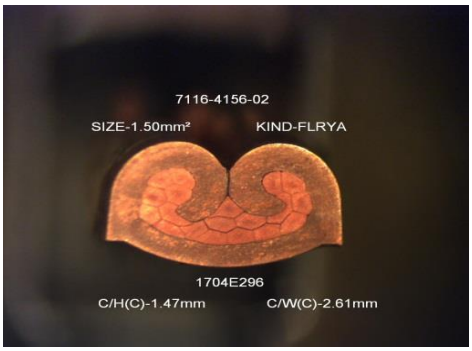
| | | |
|---|---|---|
|  | The two sides of the insulation grips are in the correct position. | **O** |
|  | Not found any Bell Mouth in the insulation area. | **O** |
|  | The lance height and shape are not deformed. | **O** |
|  | Not found any burr in the cutting carrier. | **O** |
|  | Not found any crack in the terminal. | **O** |
|  | The wire barrel is free from major burrs. | **O** |

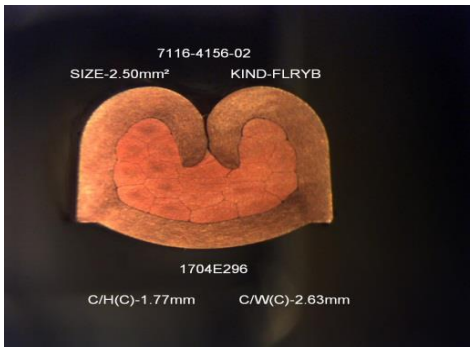
| | | |
|---|---|---|
|  | The Bell Mouth is within the spec.**(*)** | **O** |
|  | The dimension of the cutting carrier is within the spec.**(*)** | **O** |
|  | Bend up is within the criteria**(*)** | **O** |
|  | Bend down is within the criteria**(*)** | **O** |
|  | The terminal is not bent sideway, looking from the top**(*)** | **O** |
|  | The body of the terminal is not twisted**(*)** | **O** |

**(*)** - Specified on Crimping Std.

| **LOWER** WIRE KIND & SIZE | **UPPER** WIRE KIND & SIZE |
|---|---|

## 2 - MICRO CUT SAMPLES




## 3 - CRIMPING HEIGHT STABILITY

| | NOMINAL | AVERAGE | Cmk |
|---|---|---|---|
| mm | 1.47 | 1.47 | 5.72 |
| | **+/-0,05** | | |

| | NOMINAL | AVERAGE | Cmk |
|---|---|---|---|
| mm | 1.76 | 1.76 | 5.57 |
| | **+/-0,05** | | |

**REMARKS:**

Aplicable wire range 1.50mm²~2.50mm²
Wire 1.50mm² C/W(I)-3.61mm
Wire 2.50mm² C/W(I)-3.63mm

**EVALUATION DECISION**

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

| APPROVED (Section Chief) 3485 | CHECKED (Operator) 44 | PREPARED (Operator) nº 18388 |
|---|---|---|
| | | |
| Date: 2017-mai-02 | Date: 2017-abr-28 | Date: 2017-abr-27 |

YAZAKI
PORTO TECHNICAL CENTRE

# APPLICATOR VALIDATION REPORT

| Applicator Serial Nº |
|---|
| 1704E296 |

## LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1,5 $mm^2$

| | | | |
|---|---|---|---|
| Nominal Cr. Height: | 1.47 | 2.8 | mm |
| +/- | 0.05 | 0.1 | mm |

| Sample number | Crimp height WIRE (mm) | Crimp height INSULATION (mm) |
|---|---|---|
| 1 | 1.474 | 2.799 |
| 2 | 1.474 | 2.798 |
| 3 | 1.477 | 2.801 |
| 4 | 1.476 | 2.798 |
| 5 | 1.475 | 2.801 |
| 6 | 1.475 | 2.798 |
| 7 | 1.473 | 2.798 |
| 8 | 1.473 | 2.801 |
| 9 | 1.473 | 2.799 |
| 10 | 1.475 | 2.796 |
| 11 | 1.476 | 2.798 |
| 12 | 1.474 | 2.808 |
| 13 | 1.473 | 2.798 |
| 14 | 1.470 | 2.807 |
| 15 | 1.477 | 2.808 |
| 16 | 1.469 | 2.803 |
| 17 | 1.469 | 2.798 |
| 18 | 1.470 | 2.800 |
| 19 | 1.476 | 2.802 |
| 20 | 1.472 | 2.805 |
| 21 | 1.474 | 2.804 |
| 22 | 1.474 | 2.804 |
| 23 | 1.474 | 2.805 |
| 24 | 1.474 | 2.801 |
| 25 | 1.469 | 2.805 |
| 26 | 1.473 | 2.801 |
| 27 | 1.470 | 2.804 |
| 28 | 1.472 | 2.803 |
| 29 | 1.471 | 2.806 |
| 30 | 1.469 | 2.801 |
| 31 | 1.471 | 2.804 |
| 32 | 1.471 | 2.802 |
| 33 | 1.469 | 2.806 |
| 34 | 1.475 | 2.800 |
| 35 | 1.470 | 2.807 |
| 36 | 1.471 | 2.804 |
| 37 | 1.470 | 2.806 |
| 38 | 1.473 | 2.800 |
| 39 | 1.473 | 2.808 |
| 40 | 1.467 | 2.805 |
| 41 | 1.469 | 2.803 |
| 42 | 1.467 | 2.798 |
| 43 | 1.469 | 2.801 |
| 44 | 1.468 | 2.797 |
| 45 | 1.469 | 2.805 |
| 46 | 1.470 | 2.806 |
| 47 | 1.471 | 2.797 |
| 48 | 1.475 | 2.792 |
| 49 | 1.473 | 2.809 |
| 50 | 1.478 | 2.799 |
| Average | 1.47 | 2.80 |
| Cmk | 5.72 | 8.65 |

## UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 2,5 $mm^2$

| | | | |
|---|---|---|---|
| Nominal Cr. Height: | 1.76 | 3.2 | mm |
| +/- | 0.05 | 0.1 | mm |

| Sample number | Crimp height WIRE (mm) | Crimp height INSULATION (mm) |
|---|---|---|
| 1 | 1.760 | 3.206 |
| 2 | 1.761 | 3.199 |
| 3 | 1.759 | 3.204 |
| 4 | 1.762 | 3.209 |
| 5 | 1.760 | 3.203 |
| 6 | 1.761 | 3.199 |
| 7 | 1.758 | 3.205 |
| 8 | 1.759 | 3.204 |
| 9 | 1.758 | 3.198 |
| 10 | 1.758 | 3.203 |
| 11 | 1.759 | 3.201 |
| 12 | 1.760 | 3.207 |
| 13 | 1.760 | 3.199 |
| 14 | 1.758 | 3.200 |
| 15 | 1.759 | 3.201 |
| 16 | 1.762 | 3.197 |
| 17 | 1.760 | 3.198 |
| 18 | 1.760 | 3.200 |
| 19 | 1.762 | 3.199 |
| 20 | 1.758 | 3.200 |
| 21 | 1.757 | 3.202 |
| 22 | 1.760 | 3.201 |
| 23 | 1.761 | 3.198 |
| 24 | 1.757 | 3.197 |
| 25 | 1.762 | 3.196 |
| 26 | 1.758 | 3.198 |
| 27 | 1.758 | 3.199 |
| 28 | 1.761 | 3.200 |
| 29 | 1.763 | 3.191 |
| 30 | 1.757 | 3.197 |
| 31 | 1.762 | 3.206 |
| 32 | 1.753 | 3.196 |
| 33 | 1.753 | 3.200 |
| 34 | 1.763 | 3.205 |
| 35 | 1.756 | 3.203 |
| 36 | 1.760 | 3.202 |
| 37 | 1.759 | 3.201 |
| 38 | 1.754 | 3.203 |
| 39 | 1.754 | 3.203 |
| 40 | 1.757 | 3.203 |
| 41 | 1.757 | 3.202 |
| 42 | 1.757 | 3.203 |
| 43 | 1.765 | 3.200 |
| 44 | 1.765 | 3.203 |
| 45 | 1.758 | 3.203 |
| 46 | 1.756 | 3.194 |
| 47 | 1.757 | 3.197 |
| 48 | 1.766 | 3.191 |
| 49 | 1.757 | 3.193 |
| 50 | 1.764 | 3.199 |
| Average | 1.76 | 3.20 |
| Cmk | 5.57 | 8.72 |

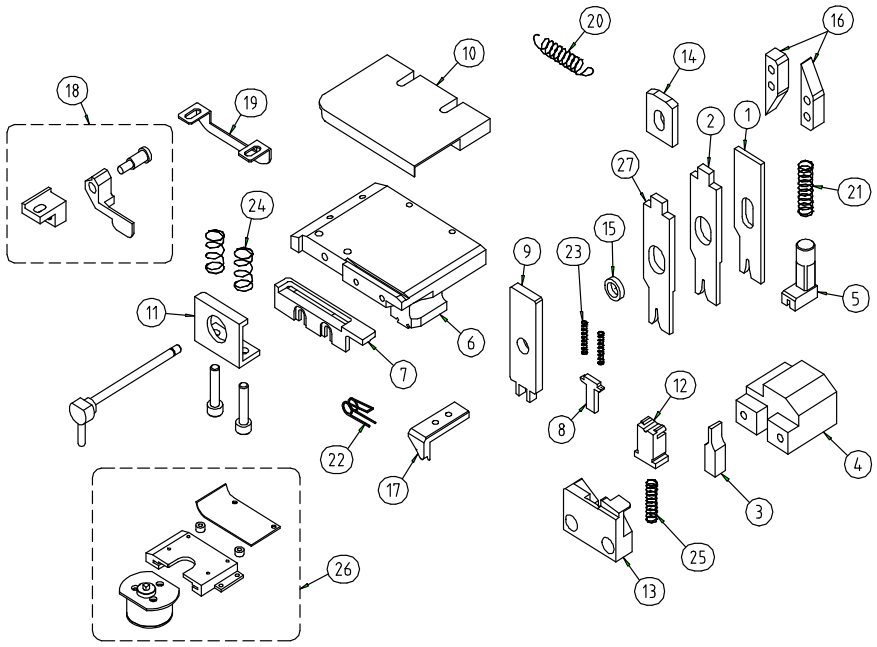
**Acceptance criteria: Cmk>= 2**

Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

**END**

# 04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

| PRODUCT No. 製品番号 | C0100-1499 | TERMINAL No. 端子品番 | 7116-4156 |
|---|---|---|---|




| No. | PARTS No. 部品番号 | DRW. No. 図番 | PARTS NAME 部品名称 | No. | PARTS No. 部品番号 | DRW. No. 図番 | PARTS NAME 部品名称 |
|---|---|---|---|---|---|---|---|
| 1 | 7116-4156XW | | WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ | 16 | 48A47014 | 005② | FEEDING CAM 送りｶﾑ |
| 2 | 7116-4156XI | | INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ | 17 | 48A47013 | | FEEDING CLAW 送り爪 |
| 3 | 7116-4156XA | | ANVIL ｱﾝﾋﾞﾙ | 18 | 48A19100 | -005 | WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ |
| 4 | 7116-4156XJE | | ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ | 19 | 48A19047 | 001 | TERMINAL SCRAPER 端子掻き落とし |
| 5 | 7116-4156XYY | | SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ | 20 | 48A47031 | | RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ |
| 6 | 7116-4156XYB | | BASE ﾍﾞｰｽ | 21 | 48A47032 | -001 | SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ |
| 7 | 7116-4156XYH | | TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB | 22 | 48A19017 | -003 | FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ |
| 8 | 48A47016 | 001 | WIRE HOLDER 電線押さえ | 23 | 48A19023 | 001 | WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ |
| 9 | 48A47017 | 002 | CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ | 24 | 48A19074 | | TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ |
| 10 | 48A47020 | A04 | TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA | 25 | 48A19050 | | SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ |
| 11 | 48A47022 | 001 | TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ | 26 | 48A19999 | | TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ |
| 12 | 48A47024 | 002 ① | SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ | | 7116-4156XKP | | BRACKET ﾌﾞﾗｹｯﾄ |
| 13 | 48A47025 | 002/101 ① | OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ | 27 | - | | ~~STABILIZER CRIMPER~~ ~~ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~ |
| 14 | 48A19007 | 023①③④⑤ | INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ | 〈ｵﾌﾟｼｮﾝ OPTION〉 | | | |
| 15 | 48A19019 | 019 | BUSH ﾌﾞｯｼｭ | 14 | 48A47042 | -001 | INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ) |

| MARK 記号 | DATE 日付 | REVISION RECORD 改訂記録 | No. 番号 | CHECKED 点検 |
|---|---|---|---|---|
| ⑤ | 2009/9/22 | 022→023 | 09J-016 | C,Abe |
| ④ | 2009/9/1 | 023→022 | 09I-015 | C,Abe |
| ③ | 2008/12/11 | 024→023 | QX7 | C,Abe |
| ② | 2008/6/23 | 001→005 | QX7 | C,Sato |
| ① | 2007/6/27 | 001→002、022→024 | QX7 | T,Suzuki |

| APPRICATION POST 申請部署 | |
|---|---|
| 接続技術部 | |
| DESIGNED DATE 設計日 | |
| 2007/3/5 | |
| APPROVED 承認 | DESIGNED 設計 |
| K,Hiraguchi | T,Suzuki |
| 2007/3/5 | 2007/3/5 |

ISSUED 発行

ISSUE
2013 / 09 / 16
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.