PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E297







TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164156 SEQUENCE Nº 9






Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-4156-02	*	**04 SIDE FEED**	**YSD-PO 25ENG/2017**	*

Anvil			Wire Crimper			Insulation Crimper		
7116-4156XA		(A)	7116-4156XW		(A)	7116-4156XI		(A)
CW (c)	2.52	*CW (i)* 3.60	*CW*	2.50		*CW*	3.60	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

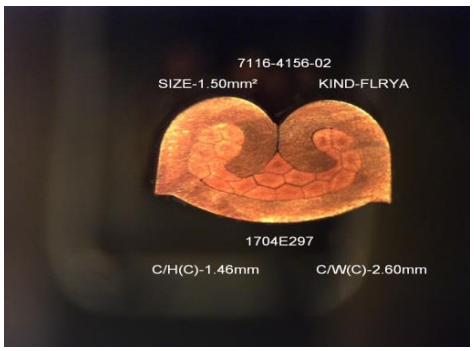
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

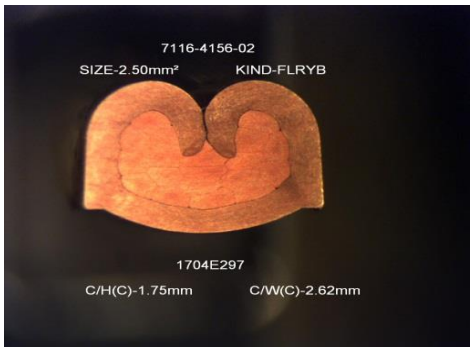
	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.47	1.47	5.55
	+/-0,05		



	NOMINAL	AVERAGE	Cmk
mm	1.76	1.76	5.06
	+/-0,05		

REMARKS:

Aplicable wire range 1.50mm²~2.50mm²
Wire 1.50mm² C/W(I)-3.60mm
Wire 2.50mm² C/W(I)-3.63mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
		
Date: 2017-mai-02	Date: 2017-abr-28	Date: 2017-abr-27

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E297

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1,5 mm^2

Nominal Cr. Height:	1.47	2.8	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.477	2.804
2	1.474	2.807
3	1.471	2.810
4	1.471	2.808
5	1.473	2.802
6	1.472	2.805
7	1.473	2.805
8	1.473	2.803
9	1.471	2.805
10	1.471	2.804
11	1.473	2.799
12	1.472	2.805
13	1.474	2.807
14	1.474	2.802
15	1.472	2.810
16	1.471	2.803
17	1.473	2.808
18	1.472	2.803
19	1.470	2.806
20	1.470	2.813
21	1.470	2.808
22	1.472	2.812
23	1.468	2.808
24	1.469	2.810
25	1.470	2.814
26	1.471	2.806
27	1.471	2.809
28	1.471	2.802
29	1.485	2.810
30	1.477	2.803
31	1.479	2.806
32	1.475	2.805
33	1.478	2.805
34	1.473	2.802
35	1.475	2.802
36	1.472	2.801
37	1.476	2.800
38	1.473	2.802
39	1.474	2.804
40	1.475	2.805
41	1.472	2.802
42	1.474	2.806
43	1.473	2.801
44	1.473	2.800
45	1.473	2.799
46	1.473	2.798
47	1.476	2.798
48	1.473	2.806
49	1.474	2.800
50	1.472	2.803
Average	1.47	2.80
Cmk	5.55	8.30

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 2,5 mm^2

Nominal Cr. Height:	1.76	3.2	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.759	3.203
2	1.762	3.202
3	1.761	3.198
4	1.761	3.201
5	1.764	3.196
6	1.763	3.191
7	1.765	3.195
8	1.764	3.196
9	1.764	3.196
10	1.763	3.193
11	1.759	3.194
12	1.758	3.190
13	1.755	3.194
14	1.757	3.199
15	1.757	3.194
16	1.760	3.195
17	1.761	3.197
18	1.755	3.192
19	1.759	3.200
20	1.756	3.196
21	1.759	3.197
22	1.758	3.196
23	1.754	3.201
24	1.752	3.198
25	1.756	3.197
26	1.762	3.192
27	1.757	3.193
28	1.755	3.199
29	1.758	3.197
30	1.762	3.196
31	1.762	3.194
32	1.764	3.193
33	1.762	3.198
34	1.762	3.192
35	1.760	3.195
36	1.758	3.196
37	1.761	3.190
38	1.763	3.189
39	1.762	3.199
40	1.761	3.195
41	1.759	3.192
42	1.759	3.192
43	1.754	3.199
44	1.766	3.188
45	1.764	3.195
46	1.761	3.189
47	1.757	3.191
48	1.759	3.194
49	1.755	3.190
50	1.761	3.197
Average	1.76	3.20
Cmk	5.06	8.93

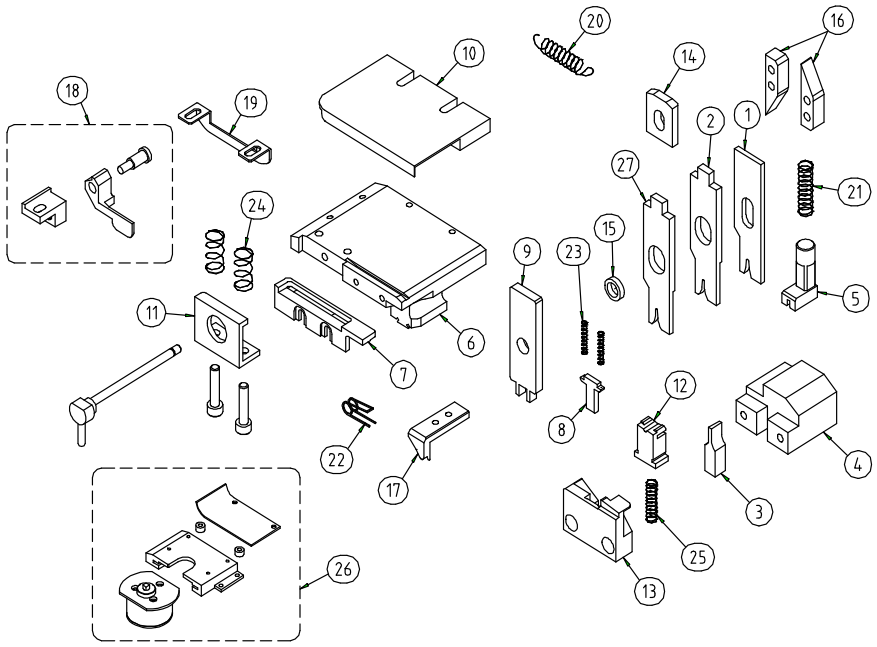
Acceptance criteria: Cmk>= 2

Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1499	TERMINAL No. 端子品番	7116-4156



No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称	No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
1	7116-4156XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	16	48A47014	005②	FEEDING CAM 送りｶﾑ
2	7116-4156XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	17	48A47013		FEEDING CLAW 送り爪
3	7116-4156XA		ANVIL ｱﾝﾋﾞﾙ	18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
4	7116-4156XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
5	7116-4156XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
6	7116-4156XYB		BASE ﾍﾞｰｽ	21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
7	7116-4156XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	23	48A19023	001	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
12	48A47024	002 ①	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ		7116-4156XKP		BRACKET ﾌﾞﾗｹｯﾄ
13	48A47025	002/101 ①	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ	27	-		~~STABILIZER CRIMPER~~ ~~ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
14	48A19007	023①③④⑤	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	〈ｵﾌﾟｼｮﾝ OPTION〉			
15	48A19019	019	BUSH ﾌﾞｯｼｭ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
⑤	2009/9/22	022→023	09J-016	C,Abe
④	2009/9/1	023→022	09I-015	C,Abe
③	2008/12/11	024→023	QX7	C,Abe
②	2008/6/23	001→005	QX7	C,Sato
①	2007/6/27	001→002、022→024	QX7	T,Suzuki

APPRICATION POST 申請部署	
接続技術部	
DESIGNED DATE 設計日	
2007/3/5	
APPROVED 承認	DESIGNED 設計
K,Hiraguchi	T,Suzuki
2007/3/5	2007/3/5

ISSUED 発行

ISSUE
2013 / 09 / 16
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.