PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E303

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164157 SEQUENCE Nº 1

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-4157-02	*	**04 SIDE FEED**	**YSD-PO 25ENG/2017**	*







Anvil		
7116-4157XA		(A)
CW (c) 2.02	*CW (i)* 2.50	






Wire Crimper		
7116-4157XW		(N)
CW 2.00		

Insulation Crimper		
7116-4157XI		(A)
CW 2.50		

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

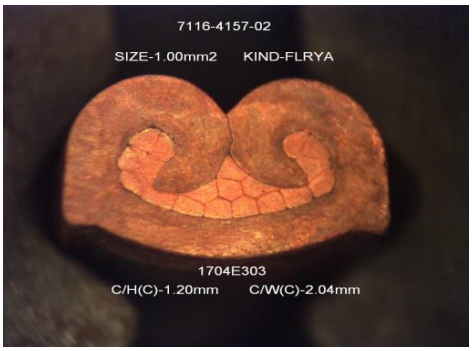
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

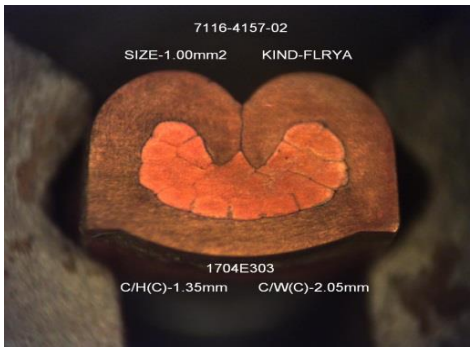
	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.2	1.20	5.43
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.35	1.36	4.13
	+/-0.05		

REMARKS:

Aplicable wire range-0.50~1.00mm2
Size 0.50mm2 C/W(I)-2.52mm
Size 1.00mm2 C/W(I)-2.55mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
Date: 2017-mai-02	Date: 2017-abr-28	Date: 2017-abr-28

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E303

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0.5 mm^2

Nominal Cr. Height:	1.2	2.15	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.208	2.151
2	1.212	2.154
3	1.207	2.157
4	1.203	2.152
5	1.205	2.149
6	1.205	2.148
7	1.210	2.150
8	1.206	2.152
9	1.203	2.156
10	1.206	2.149
11	1.209	2.146
12	1.206	2.148
13	1.203	2.151
14	1.201	2.154
15	1.201	2.150
16	1.203	2.146
17	1.206	2.142
18	1.205	2.146
19	1.203	2.147
20	1.201	2.150
21	1.199	2.147
22	1.201	2.144
23	1.201	2.145
24	1.206	2.147
25	1.205	2.148
26	1.203	2.152
27	1.200	2.152
28	1.201	2.148
29	1.203	2.144
30	1.205	2.141
31	1.204	2.145
32	1.202	2.147
33	1.202	2.151
34	1.205	2.152
35	1.204	2.149
36	1.201	2.145
37	1.199	2.142
38	1.200	2.139
39	1.203	2.145
40	1.205	2.147
41	1.204	2.151
42	1.200	2.147
43	1.203	2.144
44	1.202	2.142
45	1.199	2.140
46	1.200	2.145
47	1.202	2.147
48	1.204	2.143
49	1.203	2.141
50	1.200	2.146
Average	1.20	2.15
Cmk	5.43	7.91

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1.35	2.75	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.354	2.761
2	1.361	2.760
3	1.358	2.757
4	1.354	2.753
5	1.357	2.750
6	1.361	2.755
7	1.364	2.757
8	1.359	2.761
9	1.356	2.757
10	1.352	2.754
11	1.356	2.751
12	1.358	2.748
13	1.361	2.753
14	1.357	2.757
15	1.354	2.759
16	1.353	2.762
17	1.358	2.757
18	1.361	2.755
19	1.363	2.752
20	1.360	2.749
21	1.357	2.753
22	1.354	2.758
23	1.358	2.760
24	1.362	2.756
25	1.364	2.752
26	1.361	2.750
27	1.358	2.754
28	1.356	2.755
29	1.360	2.757
30	1.362	2.760
31	1.363	2.757
32	1.366	2.754
33	1.361	2.752
34	1.358	2.755
35	1.355	2.757
36	1.357	2.759
37	1.362	2.761
38	1.364	2.757
39	1.361	2.754
40	1.359	2.753
41	1.357	2.755
42	1.360	2.756
43	1.362	2.758
44	1.364	2.761
45	1.362	2.756
46	1.358	2.754
47	1.356	2.752
48	1.358	2.756
49	1.362	2.759
50	1.361	2.757
Average	1.36	2.76
Cmk	4.13	9.30

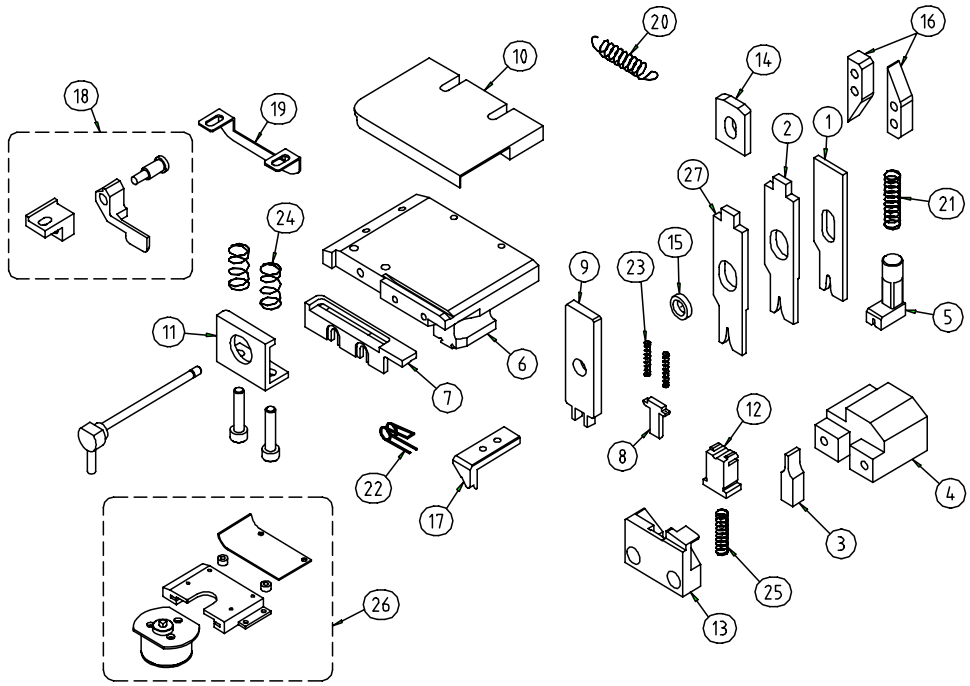
Acceptance criteria: Cmk>= 2

Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1500	TERMINAL No. 端子品番	7116-4157
Common PN 共通品番	-	-	-
	-	-	



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-4157XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-4157XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-4157XA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7116-4157XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-4157XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-4157XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-4157XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-4157XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	002①	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27			
13	48A47025	002①	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	<OPTION ｵﾌﾟｼｮﾝ>			
14	48A19007	024	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	020	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	
					HIB	
					DESIGNED DATE 設計日	
					2007/6/20	
	2013/06/14	PTC			APPROVED 承認	DESIGNED 設計
①	2007/7/9	001→002,021→025	QX7	T.Suzuki	K.Hiraguchi	T.Suzuki
					2007/6/20	2007/6/20

ISSUED '10.05.31 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED 発行