PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E306

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164157 SEQUENCE Nº 1

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-4157-02	*	**04 SIDE FEED**	**YSD-PO 25ENG/2017**	*







Anvil		
7116-4157XA		(A)
CW (c) 2,02	*CW (i)* 2,50	





Wire Crimper	
7116-4157XW	(N)
CW 2,00	

Insulation Crimper	
7116-4157XI	(A)
CW 2,50	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

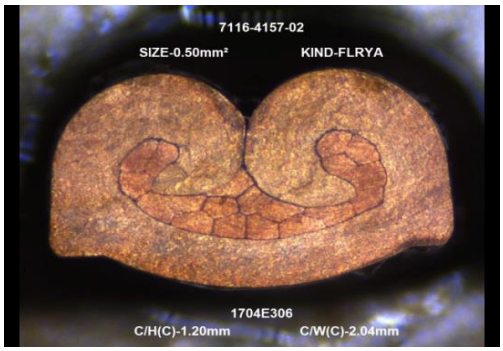
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

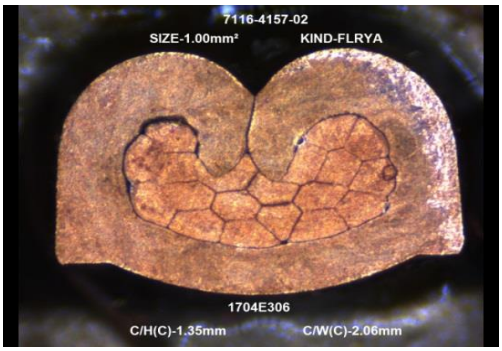
	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.2	1.20	3.38
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.35	1.35	3.28
	+/-0.05		

REMARKS:

Aplicable wire range-0.50mm² ~ 1.00mm²
Size 0.50mm² C/W(I)-2.53mm
Size 1.00mm² C/W(I)-2.56mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18597
		Rui Domingues
Date: 2017-mai-17	Date: 2017-mai-17	Date: 2017-mai-17

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E306

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0.5 mm^2

Nominal Cr. Height:	1.2	2.15	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.204	2.153
2	1.200	2.148
3	1.198	2.152
4	1.195	2.149
5	1.206	2.151
6	1.199	2.149
7	1.198	2.151
8	1.196	2.147
9	1.202	2.151
10	1.210	2.144
11	1.213	2.149
12	1.207	2.147
13	1.198	2.150
14	1.196	2.150
15	1.195	2.150
16	1.204	2.148
17	1.205	2.148
18	1.203	2.146
19	1.208	2.152
20	1.204	2.147
21	1.208	2.147
22	1.199	2.147
23	1.199	2.149
24	1.211	2.149
25	1.204	2.145
26	1.207	2.154
27	1.207	2.145
28	1.198	2.161
29	1.199	2.157
30	1.208	2.141
31	1.198	2.145
32	1.204	2.157
33	1.199	2.161
34	1.200	2.162
35	1.193	2.155
36	1.205	2.154
37	1.195	2.153
38	1.206	2.152
39	1.200	2.149
40	1.203	2.149
41	1.198	2.150
42	1.200	2.150
43	1.201	2.151
44	1.201	2.149
45	1.200	2.150
46	1.198	2.152
47	1.201	2.153
48	1.195	2.150
49	1.198	2.154
50	1.193	2.151
Average	1.20	2.15
Cmk	3.38	7.89

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1.35	2.75	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.350	2.754
2	1.350	2.746
3	1.350	2.750
4	1.341	2.746
5	1.350	2.737
6	1.352	2.753
7	1.348	2.753
8	1.337	2.750
9	1.352	2.752
10	1.347	2.749
11	1.347	2.744
12	1.351	2.750
13	1.349	2.755
14	1.348	2.756
15	1.349	2.764
16	1.351	2.753
17	1.349	2.753
18	1.348	2.760
19	1.353	2.750
20	1.354	2.762
21	1.348	2.755
22	1.352	2.750
23	1.349	2.749
24	1.348	2.752
25	1.347	2.752
26	1.348	2.752
27	1.348	2.752
28	1.351	2.748
29	1.350	2.745
30	1.350	2.749
31	1.353	2.749
32	1.353	2.749
33	1.356	2.751
34	1.342	2.749
35	1.348	2.751
36	1.357	2.749
37	1.357	2.745
38	1.336	2.751
39	1.353	2.752
40	1.333	2.752
41	1.361	2.748
42	1.352	2.751
43	1.354	2.747
44	1.354	2.753
45	1.353	2.754
46	1.354	2.752
47	1.348	2.753
48	1.351	2.755
49	1.351	2.753
50	1.352	2.750
Average	1.35	2.75
Cmk	3.28	7.56

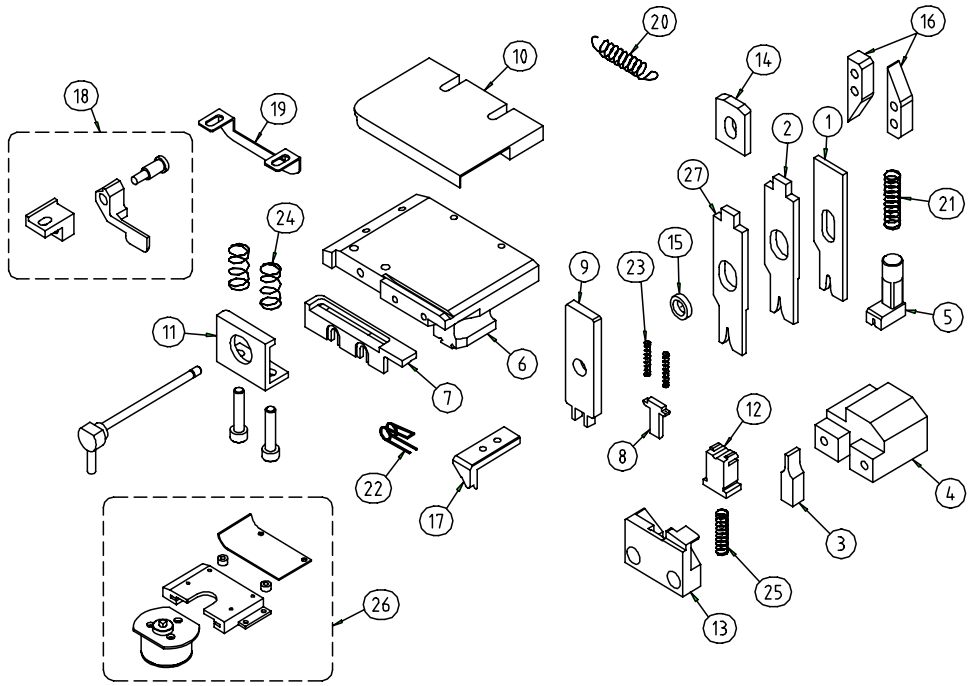
Acceptance criteria: Cmk>= 2

Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1500	TERMINAL No. 端子品番	7116-4157
Common PN 共通品番	-	-	-
	-	-	



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-4157XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-4157XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-4157XA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7116-4157XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-4157XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-4157XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-4157XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-4157XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	002①	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27			
13	48A47025	002①	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	<OPTION ｵﾌﾟｼｮﾝ>			
14	48A19007	024	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	020	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	
					HIB	
					DESIGNED DATE 設計日	
					2007/6/20	
	2013/06/14	PTC			APPROVED 承認	DESIGNED 設計
①	2007/7/9	001→002,021→025	QX7	T.Suzuki	K.Hiraguchi	T.Suzuki
					2007/6/20	2007/6/20

ISSUED '10.05.31 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED 発行