APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E314

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164157 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-4157-02	*	**04 SIDE FEED**	**YSD_2018_001~008**	*







Anvil		
7116-4157ZZXAC		(N)
CW (c) 2,05	*CW (i)* 2,44	





Wire Crimper	
7116-4157ZZXW	(N)
CW 2,03	

Insulation Crimper	
7116-4157ZZXIC	(N)
CW 2,44	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

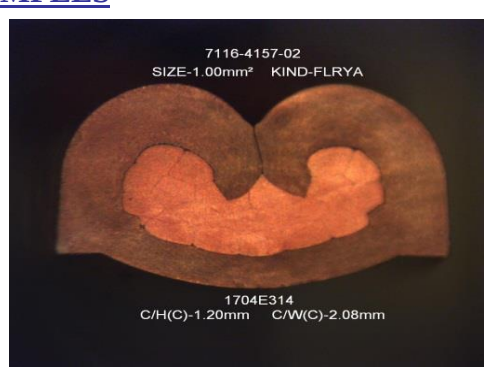
(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,15	1,16	3,55
	+/-0.05		



	NOMINAL	AVERAGE	Cmk
mm	1,2	1,21	2,86
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm².
Size 0.50mm² C/W(I)-2.49mm
Size 1.00mm² C/W(I)-2.50mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
		
Date: 2018-abr-06	Date: 2018-abr-05	Date: 2018-abr-05

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E314

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,5 mm^2

Nominal Cr. Height:	1,15	2,1	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,157	2,102
2	1,158	2,099
3	1,158	2,104
4	1,163	2,097
5	1,162	2,097
6	1,153	2,106
7	1,152	2,108
8	1,158	2,099
9	1,161	2,108
10	1,154	2,110
11	1,152	2,103
12	1,158	2,099
13	1,158	2,106
14	1,153	2,107
15	1,156	2,110
16	1,157	2,103
17	1,156	2,099
18	1,152	2,108
19	1,150	2,112
20	1,158	2,112
21	1,157	2,102
22	1,151	2,101
23	1,146	2,105
24	1,155	2,111
25	1,159	2,102
26	1,153	2,100
27	1,150	2,101
28	1,157	2,109
29	1,158	2,116
30	1,151	2,116
31	1,149	2,107
32	1,157	2,102
33	1,159	2,107
34	1,160	2,113
35	1,150	2,111
36	1,160	2,098
37	1,162	2,106
38	1,155	2,110
39	1,150	2,112
40	1,159	2,098
41	1,157	2,094
42	1,151	2,099
43	1,152	2,108
44	1,157	2,109
45	1,160	2,104
46	1,148	2,098
47	1,146	2,105
48	1,154	2,108
49	1,157	2,103
50	1,157	2,097
Average	1,16	2,10
Cmk	3,55	5,86

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1,2	2,5	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,206	2,509
2	1,211	2,509
3	1,201	2,505
4	1,207	2,505
5	1,207	2,513
6	1,201	2,507
7	1,199	2,503
8	1,205	2,508
9	1,211	2,515
10	1,202	2,509
11	1,205	2,504
12	1,205	2,504
13	1,200	2,511
14	1,202	2,514
15	1,212	2,508
16	1,207	2,503
17	1,203	2,510
18	1,200	2,511
19	1,212	2,504
20	1,209	2,500
21	1,201	2,505
22	1,201	2,511
23	1,213	2,504
24	1,217	2,500
25	1,209	2,495
26	1,205	2,502
27	1,201	2,507
28	1,214	2,500
29	1,213	2,496
30	1,203	2,504
31	1,201	2,507
32	1,209	2,507
33	1,213	2,500
34	1,211	2,505
35	1,199	2,508
36	1,197	2,498
37	1,201	2,495
38	1,210	2,503
39	1,206	2,508
40	1,201	2,508
41	1,199	2,498
42	1,212	2,496
43	1,214	2,504
44	1,204	2,506
45	1,201	2,503
46	1,201	2,497
47	1,213	2,505
48	1,207	2,508
49	1,201	2,502
50	1,205	2,496
Average	1,21	2,50
Cmk	2,86	6,34

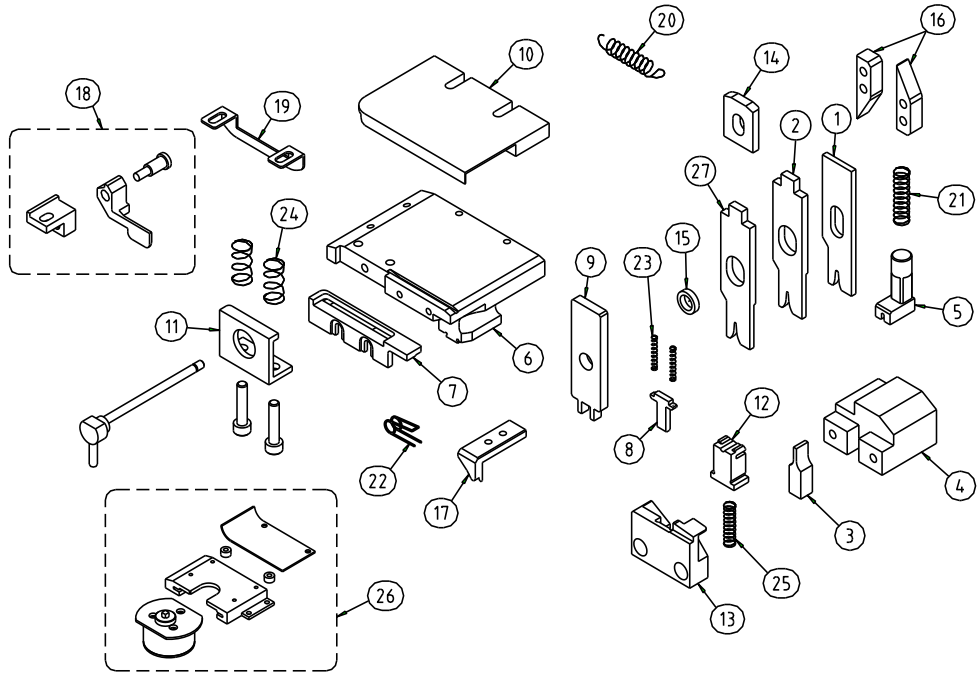
Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	ZZ	TERMINAL No. 端子品番	7116-4157 C

共通品番	–	–	–	–
	–	–		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-4157ZZXW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-4157ZZXIC		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-4157ZZXAC		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7116-4157XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-4157XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-4157XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-4157XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-4157XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	002	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27	~~7116-4157XQ~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	002	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	024	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	020	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検

APPRICATION POST 申請部署	
YWTL	
DESIGNED DATE 設計日	
17-08-2016	
APPROVED 承認	DESIGNED 設計
S.Junior	C.F.Almeida
17-08-2016	17-08-2016

ISSUED 発行