PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E315

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71151637 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7115-1637-02	**7158-3213-90**	**04 SIDE FEED**	**YSD-PO 25ENG/2017**	*







Anvil		
7115-1637DDXA		(N)
CW (c) 1.97	*CW (i)* 4.00	





Wire Crimper	
7115-1637DDXW	(1)
CW 1.95	

Insulation Crimper	
7115-1637DDXI	(A1)
CW 4.00	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

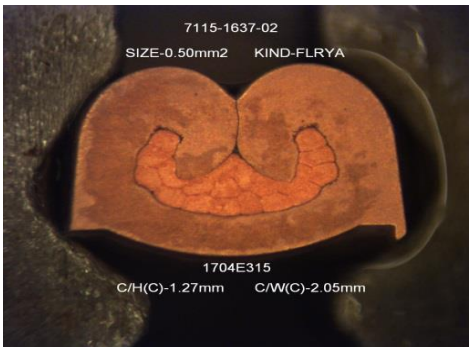
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

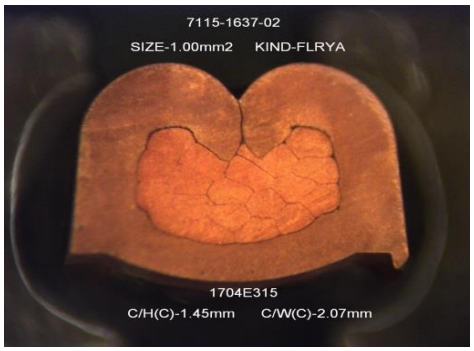
	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.27	1.27	4.14
	+/-0.05		



	NOMINAL	AVERAGE	Cmk
mm	1.45	1.45	4.76
	+/-0.05		

REMARKS:

Aplicable wire range-0.50~1.00mm²
Size 0.50mm² C/W(I)-4.06mm
Size 1.00mm² C/W(I)-4.12mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 8124	PREPARED (Operator) nº 2624
		
Date: 2017-mai-05	Date: 2017-mai-05	Date: 2017-mai-05

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E315

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0.5 mm^2

Nominal Cr. Height:	1.27	3.9	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.277	3.907
2	1.274	3.914
3	1.276	3.917
4	1.280	3.912
5	1.276	3.907
6	1.274	3.902
7	1.270	3.909
8	1.271	3.911
9	1.272	3.913
10	1.278	3.908
11	1.277	3.905
12	1.274	3.901
13	1.270	3.905
14	1.271	3.907
15	1.272	3.909
16	1.275	3.904
17	1.274	3.902
18	1.270	3.898
19	1.268	3.897
20	1.269	3.903
21	1.271	3.907
22	1.276	3.909
23	1.276	3.911
24	1.273	3.909
25	1.271	3.905
26	1.272	3.903
27	1.279	3.902
28	1.279	3.904
29	1.275	3.905
30	1.277	3.908
31	1.281	3.907
32	1.280	3.904
33	1.275	3.904
34	1.273	3.908
35	1.271	3.908
36	1.274	3.911
37	1.281	3.910
38	1.281	3.906
39	1.276	3.902
40	1.273	3.900
41	1.271	3.902
42	1.267	3.907
43	1.268	3.909
44	1.268	3.906
45	1.273	3.902
46	1.275	3.898
47	1.276	3.896
48	1.272	3.900
49	1.269	3.906
50	1.271	3.908
Average	1.27	3.91
Cmk	4.14	7.06

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1.45	4.2	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.457	4.205
2	1.453	4.207
3	1.448	4.211
4	1.449	4.207
5	1.453	4.203
6	1.458	4.200
7	1.453	4.203
8	1.451	4.204
9	1.448	4.211
10	1.444	4.205
11	1.445	4.201
12	1.450	4.197
13	1.451	4.200
14	1.453	4.201
15	1.456	4.204
16	1.453	4.204
17	1.450	4.200
18	1.448	4.196
19	1.447	4.194
20	1.451	4.199
21	1.453	4.200
22	1.456	4.204
23	1.454	4.201
24	1.451	4.196
25	1.449	4.196
26	1.446	4.199
27	1.447	4.200
28	1.449	4.204
29	1.452	4.207
30	1.457	4.203
31	1.453	4.199
32	1.451	4.194
33	1.447	4.198
34	1.448	4.203
35	1.453	4.205
36	1.454	4.206
37	1.454	4.204
38	1.450	4.201
39	1.447	4.196
40	1.450	4.196
41	1.451	4.194
42	1.455	4.201
43	1.452	4.201
44	1.449	4.207
45	1.446	4.202
46	1.447	4.199
47	1.447	4.197
48	1.455	4.203
49	1.452	4.203
50	1.456	4.209
Average	1.45	4.20
Cmk	4.76	7.76

Acceptance criteria: Cmk>= 2

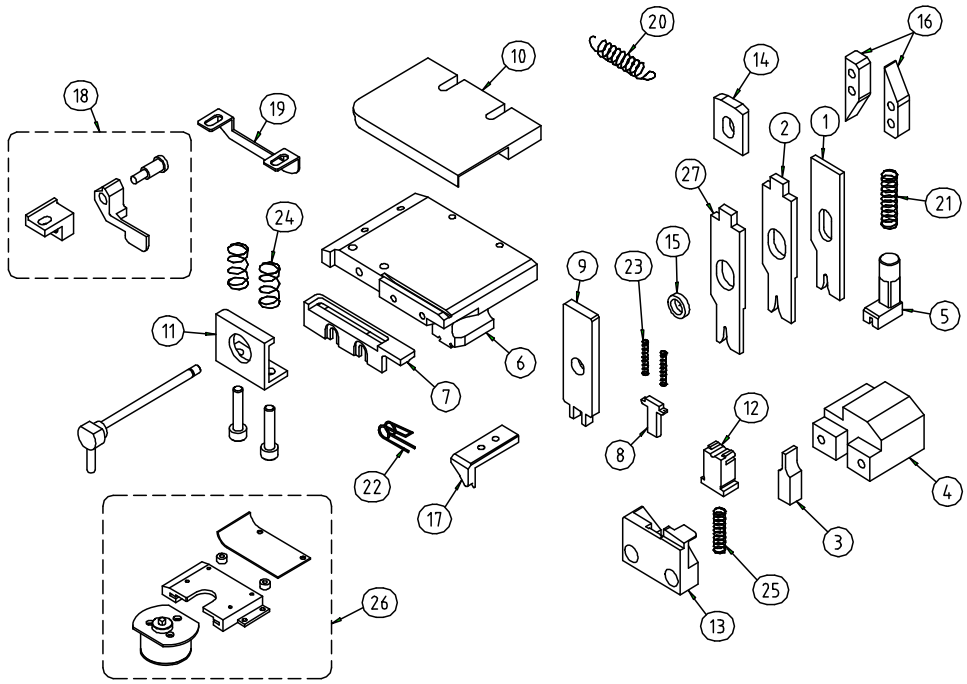
Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1160	TERMINAL No. 端子品番	7115-1637DD

Common PN 共通品番	7FB9-9098	–	–	–
	–	–		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7115-1637XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7115-1637XID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7115-1637XAD		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7115-1637XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7115-1637XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7115-1637XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7115-1637XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7115-1637XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	002 ①	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	003 ①	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	017	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
15	48A19019	027②	BUSH ﾌﾞｯｼｭ	14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	005 ①	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	
					HIB	
					DESIGNED DATE 設計日	
					2007/8/27	
②	2010/12/15	030→027	10G-024	K.Muramatsu	APPROVED 承認	DESIGNED 設計
①	2007/10/3	CHANGED No.	QX7	T,Suzuki	T,Maki	T,Suzuki
					2007/8/27	2007/8/27

ISSUED 発行

ISSUE
2014/05/12
YAZAKI PARTS CO.,LTD HAIBARA OFFICE