APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E316

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71151928 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7115-1928-06	**7157-3057-40**	**04 SIDE FEED**	**YSD_2018_001~008**	*







Anvil		
7115-1928ZZXAD		(N)
CW (c) 1,92	*CW (i)* 3,22	





Wire Crimper		
7115-1928ZZXW		(N)
CW 1,90		

Insulation Crimper		
7115-1928ZZXID		(N)
CW 3,28		

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

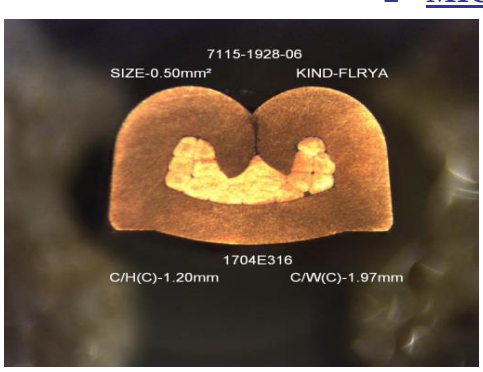
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

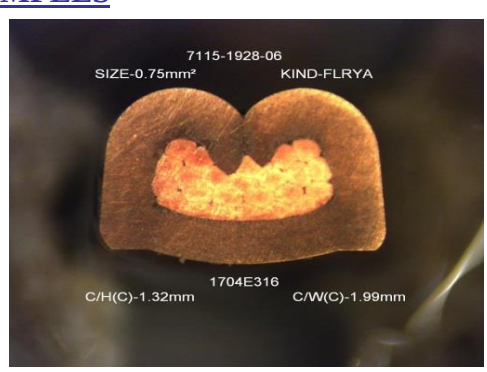
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,2	1,20	4,98
	+/-0,05		



	NOMINAL	AVERAGE	Cmk
mm	1,32	1,32	4,17
	+/-0,05		

REMARKS:

Aplicable Wire Range 0.50mm²~0.75mm²
Wire 0.50mm² C/W(I)-3.27mm
Wire 0.75mm² C/W(I)-3.30mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 678
		
Date: 2018-mar-27	Date: 2018-mar-27	Date: 2018-mar-27

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E316

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,5 mm^2

Nominal Cr. Height:	1,2	3,25	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,201	3,255
2	1,204	3,241
3	1,200	3,259
4	1,200	3,263
5	1,203	3,267
6	1,202	3,254
7	1,200	3,249
8	1,205	3,249
9	1,207	3,258
10	1,208	3,263
11	1,205	3,250
12	1,203	3,245
13	1,203	3,245
14	1,208	3,255
15	1,207	3,257
16	1,205	3,259
17	1,203	3,246
18	1,206	3,245
19	1,209	3,256
20	1,209	3,259
21	1,207	3,262
22	1,204	3,250
23	1,210	3,262
24	1,201	3,255
25	1,200	3,251
26	1,207	3,257
27	1,202	3,261
28	1,202	3,251
29	1,204	3,253
30	1,206	3,258
31	1,207	3,248
32	1,202	3,249
33	1,200	3,260
34	1,206	3,261
35	1,209	3,256
36	1,209	3,260
37	1,205	3,257
38	1,201	3,253
39	1,206	3,259
40	1,206	3,265
41	1,202	3,256
42	1,200	3,254
43	1,198	3,259
44	1,201	3,265
45	1,206	3,263
46	1,205	3,257
47	1,201	3,255
48	1,200	3,258
49	1,203	3,256
50	1,202	3,252
Average	1,20	3,26
Cmk	4,98	5,34

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,75 mm^2

Nominal Cr. Height:	1,32	3,5	mm
+/-	0,05	0,1	mm

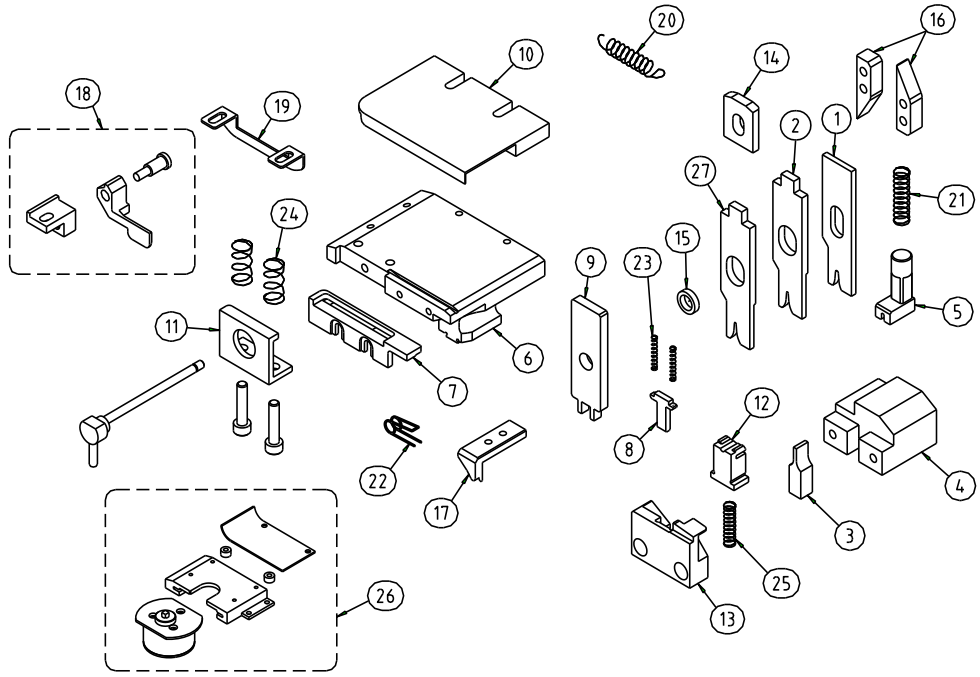
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,325	3,501
2	1,319	3,507
3	1,322	3,502
4	1,327	3,501
5	1,323	3,505
6	1,322	3,507
7	1,326	3,503
8	1,330	3,494
9	1,330	3,497
10	1,324	3,505
11	1,320	3,510
12	1,319	3,510
13	1,319	3,501
14	1,323	3,497
15	1,321	3,496
16	1,317	3,506
17	1,320	3,509
18	1,322	3,511
19	1,324	3,511
20	1,320	3,504
21	1,319	3,516
22	1,319	3,516
23	1,325	3,506
24	1,328	3,499
25	1,323	3,498
26	1,319	3,496
27	1,323	3,503
28	1,325	3,508
29	1,328	3,509
30	1,325	3,505
31	1,321	3,501
32	1,323	3,508
33	1,327	3,512
34	1,328	3,513
35	1,325	3,501
36	1,319	3,502
37	1,319	3,504
38	1,322	3,499
39	1,327	3,497
40	1,329	3,502
41	1,329	3,515
42	1,322	3,514
43	1,326	3,504
44	1,329	3,506
45	1,329	3,507
46	1,321	3,509
47	1,320	3,501
48	1,326	3,513
49	1,330	3,513
50	1,327	3,504
Average	1,32	3,51
Cmk	4,17	5,54

Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	KOSTAL	TERMINAL No. 端子品番	7115-1928 DD
共通品番	–	–	–
	–	–	



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7115-1928ZZXW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7115-1928ZZXID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7115-1928ZZXAD		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	003	TERMINAL SCRAPER 端子掻き落とし
4	7115-1928XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7115-1928XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7115-1928XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7115-1928XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A05	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7115-1928XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	002	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	003	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	014	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	037	BUSH ﾌﾞｯｼｭ	14	48A47042	002	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検

APPRICATION POST 申請部署	
PTC	
DESIGNED DATE 設計日	
14-03-2017	
APPROVED 承認	DESIGNED 設計
S.Junior	C.Almeida
14-03-2017	14-03-2017

ISSUED 発行