PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE



# APPLICATOR VALIDATION REPORT

**(Spec. YEL-RP-02-0004)**

| Applicator Serial Nº |
|---|
| 1704E319 |







***TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72168297 SEQUENCE Nº*** 9







| Terminal Nº | Rubber Seal | Applicator Type | Purchasing Order Nº | Project / Model |
|---|---|---|---|---|
| **7216-8297-02** | * | **04 SIDE FEED** | **YSD-PO 25ENG/2017** | * |

| Anvil | | | Wire Crimper | | | Insulation Crimper | | |
|---|---|---|---|---|---|---|---|---|
| 7216-8297XAC | | (N) | 7216-8297XW | | (N) | 7216-8297XIC | | (N) |
| *CW (c)* | 2.42 | *CW (i)* 3.70 | *CW* | 2.40 | | *CW* | 3.70 | |

## 1 - VISUAL CHECK ITEMS

**O** - ok **X** - ng **NA** - not aplicable

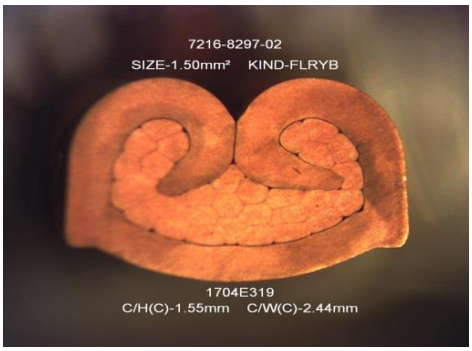
| | | |
|---|---|---|
|  | The two sides of the insulation grips are in the correct position. | **O** |
|  | Not found any Bell Mouth in the insulation area. | **O** |
|  | The lance height and shape are not deformed. | **O** |
|  | Not found any burr in the cutting carrier. | **O** |
|  | Not found any crack in the terminal. | **O** |
|  | The wire barrel is free from major burrs. | **O** |

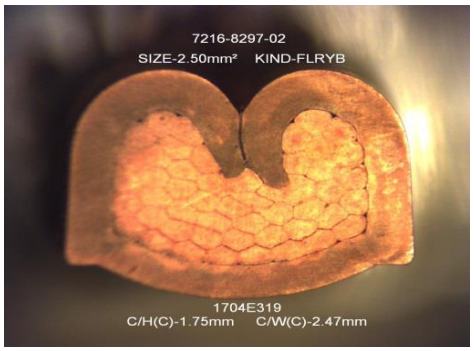
| | | |
|---|---|---|
|  | The Bell Mouth is within the spec.**(*)** | **O** |
|  | The dimension of the cutting carrier is within the spec.**(*)** | **O** |
|  | Bend up is within the criteria**(*)** | **O** |
|  | Bend down is within the criteria**(*)** | **O** |
|  | The terminal is not bent sideway, looking from the top**(*)** | **O** |
|  | The body of the terminal is not twisted**(*)** | **O** |

**(*)** - Specified on Crimping Std.

| **LOWER** WIRE KIND & SIZE | **UPPER** WIRE KIND & SIZE |
|---|---|

## 2 - MICRO CUT SAMPLES




## 3 - CRIMPING HEIGHT STABILITY

| | NOMINAL | AVERAGE | Cmk |
|---|---|---|---|
| mm | 1.55 | 1.55 | 4.12 |
| | **+/-0.05** | | |

| | NOMINAL | AVERAGE | Cmk |
|---|---|---|---|
| mm | 1.75 | 1.76 | 2.40 |
| | **+/-0.05** | | |

**REMARKS:**

Aplicable wire range 1.50mm²~2.50mm².
Size 1.50mm² C/W(I)-3.70mm
Size 2.50mm² C/W(I)-3.74mm

**EVALUATION DECISION**

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

| APPROVED (Section Chief) 3485 | CHECKED (Operator) 44 | PREPARED (Operator) nº 2988 |
|---|---|---|
| | | Vitor Hugo |
| Date: 2017-mai-19 | Date: 2017-mai-18 | Date: 2017-mai-18 |

YAZAKI
PORTO TECHNICAL CENTRE

# APPLICATOR VALIDATION REPORT

| Applicator Serial Nº |
|---|
| 1704E319 |

## LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 1.5 $mm^2$

| | | | |
|---|---|---|---|
| Nominal Cr. Height: | 1.55 | 2.8 | mm |
| +/- | 0.05 | 0.1 | mm |

| Sample number | Crimp height WIRE (mm) | Crimp height INSULATION (mm) |
|---|---|---|
| 1 | 1.558 | 2.811 |
| 2 | 1.550 | 2.801 |
| 3 | 1.554 | 2.813 |
| 4 | 1.558 | 2.815 |
| 5 | 1.555 | 2.810 |
| 6 | 1.557 | 2.805 |
| 7 | 1.550 | 2.805 |
| 8 | 1.548 | 2.804 |
| 9 | 1.552 | 2.813 |
| 10 | 1.556 | 2.817 |
| 11 | 1.550 | 2.814 |
| 12 | 1.556 | 2.804 |
| 13 | 1.554 | 2.810 |
| 14 | 1.550 | 2.820 |
| 15 | 1.553 | 2.800 |
| 16 | 1.556 | 2.799 |
| 17 | 1.550 | 2.809 |
| 18 | 1.546 | 2.814 |
| 19 | 1.551 | 2.813 |
| 20 | 1.555 | 2.802 |
| 21 | 1.554 | 2.802 |
| 22 | 1.546 | 2.801 |
| 23 | 1.546 | 2.811 |
| 24 | 1.552 | 2.811 |
| 25 | 1.554 | 2.804 |
| 26 | 1.547 | 2.801 |
| 27 | 1.543 | 2.799 |
| 28 | 1.551 | 2.811 |
| 29 | 1.551 | 2.813 |
| 30 | 1.546 | 2.807 |
| 31 | 1.553 | 2.799 |
| 32 | 1.552 | 2.811 |
| 33 | 1.546 | 2.812 |
| 34 | 1.552 | 2.805 |
| 35 | 1.544 | 2.798 |
| 36 | 1.550 | 2.810 |
| 37 | 1.554 | 2.809 |
| 38 | 1.552 | 2.799 |
| 39 | 1.545 | 2.794 |
| 40 | 1.552 | 2.803 |
| 41 | 1.554 | 2.806 |
| 42 | 1.555 | 2.799 |
| 43 | 1.546 | 2.797 |
| 44 | 1.554 | 2.797 |
| 45 | 1.555 | 2.807 |
| 46 | 1.549 | 2.803 |
| 47 | 1.546 | 2.797 |
| 48 | 1.553 | 2.798 |
| 49 | 1.555 | 2.805 |
| 50 | 1.557 | 2.808 |
| Average | 1.55 | 2.81 |
| Cmk | 4.12 | 5.05 |

## UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 2.5 $mm^2$

| | | | |
|---|---|---|---|
| Nominal Cr. Height: | 1.75 | 2.9 | mm |
| +/- | 0.05 | 0.1 | mm |

| Sample number | Crimp height WIRE (mm) | Crimp height INSULATION (mm) |
|---|---|---|
| 1 | 1.762 | 2.908 |
| 2 | 1.757 | 2.898 |
| 3 | 1.760 | 2.900 |
| 4 | 1.761 | 2.906 |
| 5 | 1.759 | 2.910 |
| 6 | 1.758 | 2.901 |
| 7 | 1.763 | 2.899 |
| 8 | 1.767 | 2.902 |
| 9 | 1.768 | 2.908 |
| 10 | 1.757 | 2.900 |
| 11 | 1.763 | 2.897 |
| 12 | 1.767 | 2.902 |
| 13 | 1.759 | 2.907 |
| 14 | 1.762 | 2.899 |
| 15 | 1.768 | 2.899 |
| 16 | 1.766 | 2.906 |
| 17 | 1.758 | 2.907 |
| 18 | 1.764 | 2.897 |
| 19 | 1.769 | 2.903 |
| 20 | 1.765 | 2.909 |
| 21 | 1.755 | 2.911 |
| 22 | 1.753 | 2.901 |
| 23 | 1.760 | 2.899 |
| 24 | 1.764 | 2.901 |
| 25 | 1.754 | 2.909 |
| 26 | 1.753 | 2.907 |
| 27 | 1.751 | 2.899 |
| 28 | 1.765 | 2.896 |
| 29 | 1.766 | 2.907 |
| 30 | 1.750 | 2.910 |
| 31 | 1.758 | 2.901 |
| 32 | 1.765 | 2.896 |
| 33 | 1.767 | 2.905 |
| 34 | 1.757 | 2.908 |
| 35 | 1.752 | 2.909 |
| 36 | 1.760 | 2.899 |
| 37 | 1.766 | 2.896 |
| 38 | 1.761 | 2.905 |
| 39 | 1.752 | 2.909 |
| 40 | 1.751 | 2.903 |
| 41 | 1.763 | 2.894 |
| 42 | 1.756 | 2.898 |
| 43 | 1.751 | 2.907 |
| 44 | 1.748 | 2.900 |
| 45 | 1.755 | 2.896 |
| 46 | 1.760 | 2.905 |
| 47 | 1.758 | 2.907 |
| 48 | 1.750 | 2.910 |
| 49 | 1.760 | 2.895 |
| 50 | 1.761 | 2.894 |
| Average | 1.76 | 2.90 |
| Cmk | 2.40 | 6.46 |

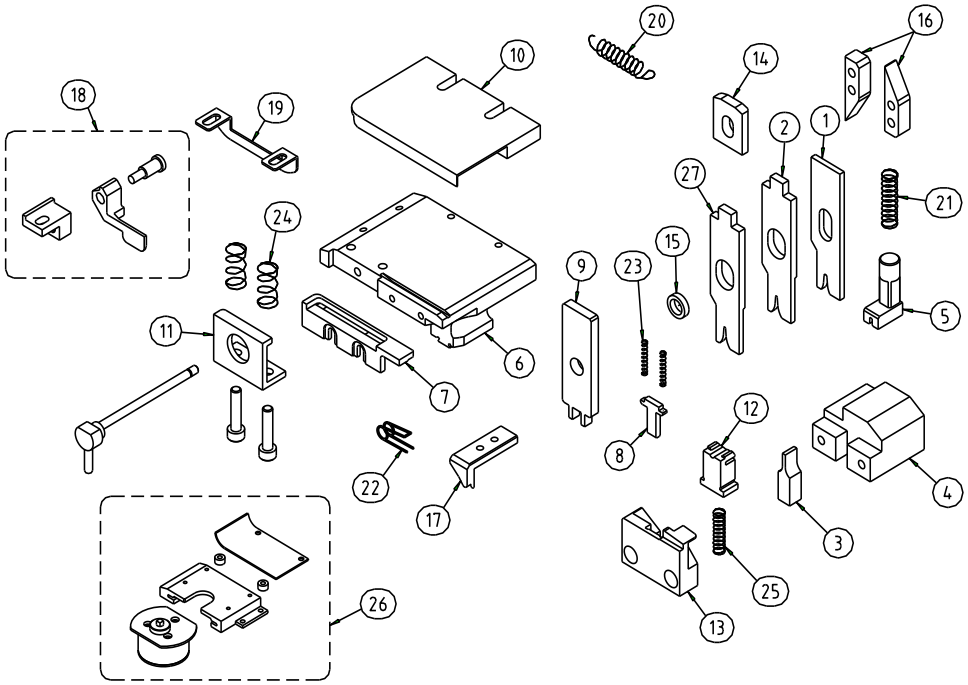
**Acceptance criteria: Cmk>= 2**

Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

**END**

# 04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

| PRODUCT No. 製品番号 | C0100-4909 | TERMINAL No. 端子品番 | 7216-8297 C |
|---|---|---|---|
| 共通品番 | – – | – – | – – |




| No, | PARTS No, 部品番号 | DRW No, 図番 | PARTS NAME 部品名称 | No, | PARTS No, 部品番号 | DRW No, 図番 | PARTS NAME 部品名称 |
|---|---|---|---|---|---|---|---|
| 1 | 7216-8297XW | | WIRE CRIMPER ワイヤークリンパー | 17 | 48A47013 | -001 | FEEDING CLAW 送り爪 |
| 2 | 7216-8297XIC | | INSULATION CRIMPER インシュレーションクリンパー | 18 | 48A19100 | -005 | WIRE STOPPER Assy 電線ストッパー アッシー |
| 3 | 7216-8297XAC | | ANVIL アンビル | 19 | 48A19047 | -002 | TERMINAL SCRAPER 端子掻き落とし |
| 4 | 7216-8297XJE | | ANVIL HOLDER アンビルホルダー | 20 | 48A47031 | | RETURN SPRING 戻しスプリング |
| 5 | ~~7216-8297XYY~~ | | ~~SUPPORTING STOPPER サポーティングストッパー~~ | 21 | ~~48A47032~~ | ~~-001~~ | ~~SUPPORTING STOPPER SPRING サポーティングストッパースプリング~~ |
| 6 | 7216-8297XYB | | BASE ベース | 22 | 48A19017 | -003 | FEEDING CLAW SPRING 送り爪スプリング |
| 7 | 7216-8297XYH | | TERMINAL GUIDE PLATE B ターミナルガイドプレートB | 23 | 48A19023 | -002 | WIRE HOLDER SPRING 電線押さえスプリング |
| 8 | 48A47016 | -001 | WIRE HOLDER 電線押さえ | 24 | 48A19074 | | TERMINAL HOLDER SPRING ターミナル押さえスプリング |
| 9 | 48A47017 | -002 | CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー | 25 | 48A19050 | | SHEARBLADE SPRING シャープレートスプリング |
| 10 | 48A47020 | -A04 | TERMINAL GUIDE PLATE A ターミナルガイドプレートA | 26 | 48A19999 | | TERMINAL OIL UNIT ターミナル塗油ユニット |
| 11 | 48A47022 | -001 | TERMINAL HOLDER ターミナル押さえ | | 7216-8297XKP | | BRACKET ブラケット |
| 12 | 48A47024 | -002 | SHEARBLADE シャープレード | 27 | ~~7216-8297XQ~~ | | ~~STABILIZER CRIMPER スタビライザークリンパー~~ |
| 13 | 48A47025 | -001 | OUTER SHEARBLADE アウターシャープレード | 〈OPTION オプション〉 | | | |
| 14 | 48A19007 | -026 | INSULATION ADJUSTING PIECE インシュレーション調整コマ | 13 | 48A47025 | -101 | OUTER SHEARBLADE アウターシャープレード |
| 15 | 48A19019 | -013 | BUSH ブッシュ | 14 | 48A47042 | -001 | INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル) |
| 16 | 48A47014 | -001 | FEEDING CAM 送りカム | | | | |

| MARK 記号 | DATE 日付 | REVISION RECORD 改訂記録 | No. 番号 | CHECKED 点検 | APPRICATION POST 申請部署 | | ISSUED 発行 |
|---|---|---|---|---|---|---|---|
| | | | | | YWTC | | |
| | | | | | DESIGNED DATE 設計日 | | |
| | | | | | 23-09-2009 | | |
| | | | | | APPROVED 承認 | DESIGNED 設計 | |
| | | | | | T,Maki | C.Almeida | |
| | | | | | 23-09-2009 | 23-09-2009 | |