APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1709E103







TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71168012 SEQUENCE Nº 9





Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-8012-06	*	**04 SIDE FEED**	**SD-DAIMLER SFTP XVK**	*

Anvil			Wire Crimper			Insulation Crimper		
7116-8012XAC		(N)	7116-8012XW		(N)	7116-8012XIC		(N)
CW (c)	2,05	*CW (i)* 2,54	*CW*	2,03		*CW*	2,54	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

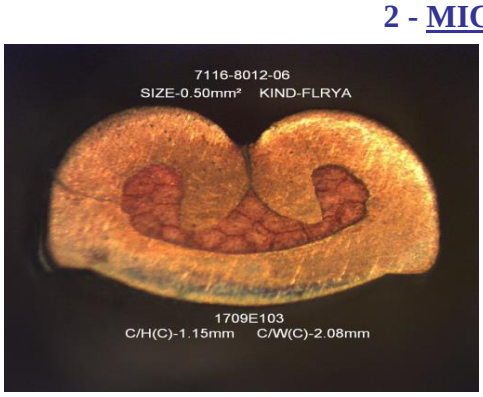
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

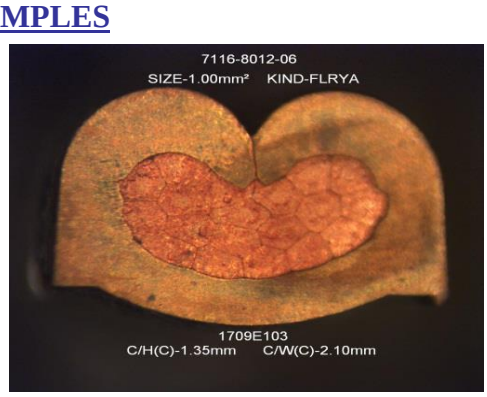
	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,15	1,15	3,42
	+/-0.05		



	NOMINAL	AVERAGE	Cmk
mm	1,35	1,35	2,70
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm².
Size 0.50mm² C/W(I)-2.55mm
Size 1.00mm² C/W(I)-2.58mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
		
Date: 2017-out-19	Date: 2017-out-19	Date: 2017-out-19

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1709E103

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,5 mm^2

Nominal Cr. Height:	1,15	2,2	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,152	2,210
2	1,157	2,206
3	1,155	2,201
4	1,153	2,215
5	1,159	2,216
6	1,150	2,203
7	1,154	2,199
8	1,158	2,207
9	1,149	2,216
10	1,148	2,214
11	1,150	2,208
12	1,157	2,204
13	1,160	2,202
14	1,150	2,213
15	1,150	2,215
16	1,159	2,206
17	1,160	2,201
18	1,150	2,204
19	1,144	2,212
20	1,155	2,219
21	1,160	2,206
22	1,155	2,200
23	1,150	2,199
24	1,149	2,212
25	1,160	2,217
26	1,160	2,202
27	1,148	2,198
28	1,152	2,195
29	1,160	2,212
30	1,157	2,199
31	1,149	2,204
32	1,155	2,212
33	1,160	2,205
34	1,154	2,202
35	1,146	2,213
36	1,155	2,203
37	1,159	2,201
38	1,155	2,214
39	1,156	2,215
40	1,158	2,203
41	1,148	2,207
42	1,154	2,218
43	1,160	2,212
44	1,158	2,201
45	1,152	2,209
46	1,159	2,216
47	1,152	2,206
48	1,149	2,197
49	1,158	2,196
50	1,155	2,209
Average	1,15	2,21
Cmk	3,42	4,73

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1,35	2,6	mm
+/-	0,05	0,1	mm

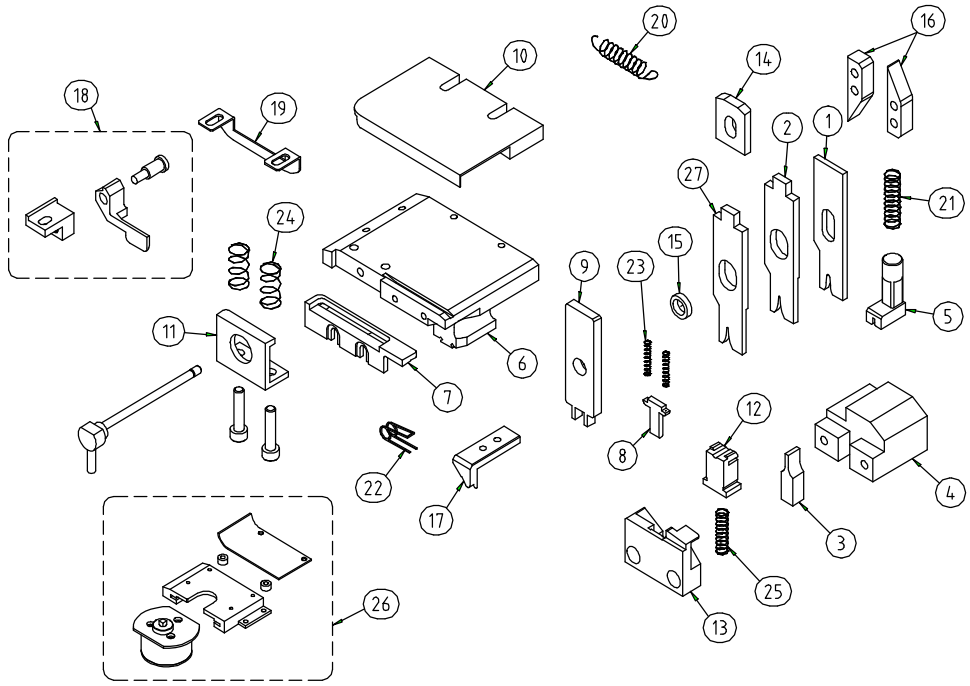
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,358	2,603
2	1,356	2,607
3	1,347	2,600
4	1,342	2,611
5	1,345	2,604
6	1,355	2,599
7	1,352	2,611
8	1,343	2,616
9	1,353	2,611
10	1,358	2,603
11	1,360	2,602
12	1,351	2,613
13	1,347	2,616
14	1,353	2,617
15	1,358	2,603
16	1,355	2,600
17	1,348	2,605
18	1,344	2,614
19	1,356	2,601
20	1,360	2,598
21	1,352	2,602
22	1,344	2,612
23	1,348	2,617
24	1,358	2,602
25	1,361	2,597
26	1,350	2,595
27	1,346	2,608
28	1,353	2,613
29	1,360	2,601
30	1,360	2,597
31	1,349	2,610
32	1,343	2,615
33	1,355	2,602
34	1,348	2,596
35	1,358	2,606
36	1,360	2,616
37	1,351	2,606
38	1,358	2,597
39	1,359	2,606
40	1,350	2,612
41	1,361	2,618
42	1,360	2,601
43	1,350	2,597
44	1,347	2,598
45	1,358	2,608
46	1,362	2,610
47	1,356	2,598
48	1,346	2,606
49	1,349	2,608
50	1,354	2,610
Average	1,35	2,61
Cmk	2,70	4,71

Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-4481	TERMINAL No. 端子品番	7116-8012C
Common PN 共通品番	–	–	–
	–	–	



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-8012XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-8012XIC		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-8012XAC		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	002	TERMINAL SCRAPER 端子掻き落とし
4	7116-8012XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-8012XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-8012XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-8012XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	002	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-8012XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	001	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	025	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	013	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					HIB		ISSUED '12.04.20 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.
					DESIGNED DATE 設計日		
					2008/1/31		
					APPROVED 承認	DESIGNED 設計	
					T,Maki	T,Suzuki	
					2008/1/31	2008/1/31	