APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1709E114

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71142575 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7114-2575-06	*	**04 SIDE FEED**	**D-DAIMLER SFTP XVK**	*







Anvil		
7114-2575XA		(N)
CW (c) 1,97	*CW (i)* 2,45	





Wire Crimper		
7114-2575XW		(N)
CW 1,95		

Insulation Crimper		
7114-2575XI		(N)
CW 2,45		

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

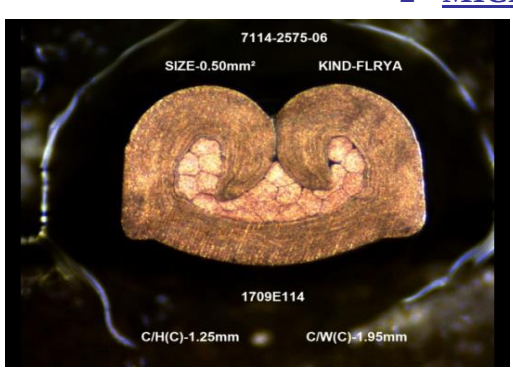
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

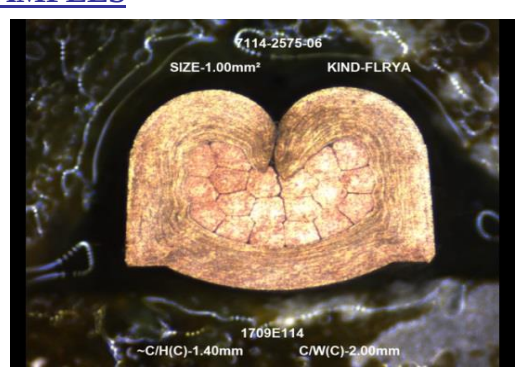
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,25	1,25	2,73
	+/-0.05		



	NOMINAL	AVERAGE	Cmk
mm	1,4	1,40	3,05
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm².
Size 0.50mm² C/W(I)-2.32mm
Size 0.85mm² C/W(I)-2.49mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18597
		
Date: 2017-out-19	Date: 2017-out-19	Date: 2017-out-18

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1709E114

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,5 mm^2

Nominal Cr. Height:	1,25	2	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,250	2,000
2	1,251	1,998
3	1,251	2,003
4	1,255	2,003
5	1,254	2,011
6	1,251	2,011
7	1,255	2,005
8	1,245	1,999
9	1,249	1,993
10	1,246	1,996
11	1,252	2,000
12	1,254	2,006
13	1,252	2,003
14	1,250	1,996
15	1,253	2,007
16	1,248	2,001
17	1,248	1,999
18	1,254	2,021
19	1,250	2,003
20	1,248	2,011
21	1,251	2,011
22	1,251	2,006
23	1,247	2,005
24	1,246	2,000
25	1,254	1,995
26	1,259	1,994
27	1,256	1,999
28	1,255	2,001
29	1,237	1,997
30	1,252	1,998
31	1,253	2,000
32	1,247	2,002
33	1,248	2,001
34	1,250	1,998
35	1,254	2,002
36	1,254	1,996
37	1,246	1,999
38	1,247	2,007
39	1,253	2,005
40	1,230	2,001
41	1,229	1,997
42	1,250	1,995
43	1,243	1,997
44	1,243	1,999
45	1,243	2,001
46	1,243	2,004
47	1,248	2,005
48	1,248	2,004
49	1,250	2,003
50	1,238	2,006
Average	1,25	2,00
Cmk	2,73	6,18

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1,4	2,4	mm
+/-	0,05	0,1	mm

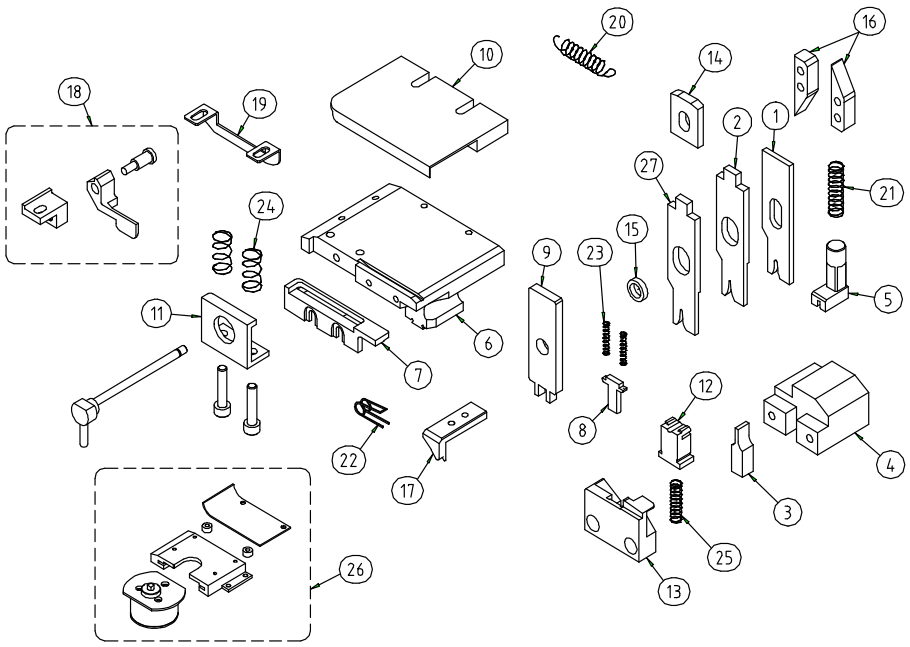
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,401	2,407
2	1,398	2,402
3	1,396	2,398
4	1,398	2,395
5	1,399	2,393
6	1,406	2,398
7	1,396	2,400
8	1,405	2,399
9	1,397	2,401
10	1,399	2,401
11	1,391	2,403
12	1,402	2,397
13	1,403	2,396
14	1,399	2,396
15	1,397	2,398
16	1,404	2,400
17	1,407	2,398
18	1,408	2,404
19	1,398	2,400
20	1,396	2,415
21	1,398	2,388
22	1,403	2,394
23	1,402	2,391
24	1,394	2,388
25	1,391	2,394
26	1,398	2,399
27	1,398	2,400
28	1,385	2,401
29	1,402	2,404
30	1,385	2,396
31	1,397	2,402
32	1,390	2,402
33	1,398	2,397
34	1,398	2,399
35	1,400	2,401
36	1,406	2,403
37	1,407	2,404
38	1,405	2,399
39	1,401	2,403
40	1,400	2,402
41	1,405	2,402
42	1,400	2,399
43	1,405	2,399
44	1,394	2,397
45	1,398	2,404
46	1,406	2,403
47	1,403	2,405
48	1,396	2,399
49	1,393	2,403
50	1,392	2,398
Average	1,40	2,40
Cmk	3,05	7,21

Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-4477	TERMINAL No. 端子品番	7114-2575
Common PN 共通品番	–	–	–
	–	–	



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7114-2575XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7114-2575XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7114-2575XA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7114-2575XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7114-2575XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7114-2575XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7114-2575XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7114-2575XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	021 ①	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	7114-2575XP ①		OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	021	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	7214-1841XP-B		OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
15	48A19019	030	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
①	2008/3/4	CHANGED PARTS No,	08C-005	T,Suzuki

APPRICATION POST 申請部署	
HIB	
DESIGNED DATE 設計日	
2008/1/29	
APPROVED 承認	DESIGNED 設計
T,Maki	T,Suzuki
2008/1/29	2008/1/29

ISSUED 発行

ISSUE
2013 / 10 / 12
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.