APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1709E116

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71161906 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-1906-02	**7157-3961**	**04 SIDE FEED**	**YSD_2018_001~008**	*







Anvil		
7116-1906ZZXAD		(N)
CW (c) 2,56	*CW (i)* 4,19	





Wire Crimper	
7116-1906ZZXW	(N)
CW 2,54	

Insulation Crimper	
7116-1906ZZXID	(N)
CW 4,19	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

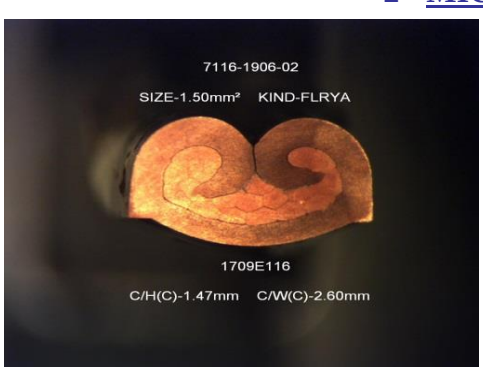
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,47	1,47	4,97
	+/-0,05		



	NOMINAL	AVERAGE	Cmk
mm	1,76	1,76	5,45
	+/-0,05		

REMARKS:

Aplicable wire range 1.50mm²~2.50mm²
Wire 1.50mm² C/W(I)-4.25mm
Wire 2.50mm² C/W(I)-4.30mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
		
Date: 2018-mar-29	Date: 2018-mar-28	Date: 2018-mar-28

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1709E116

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1,5 mm^2

Nominal Cr. Height:	1,47	4,2	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,470	4,203
2	1,468	4,200
3	1,469	4,203
4	1,469	4,200
5	1,471	4,201
6	1,468	4,201
7	1,472	4,195
8	1,470	4,201
9	1,469	4,202
10	1,468	4,203
11	1,468	4,199
12	1,470	4,199
13	1,468	4,200
14	1,470	4,201
15	1,464	4,199
16	1,470	4,200
17	1,470	4,204
18	1,470	4,204
19	1,467	4,195
20	1,470	4,205
21	1,469	4,204
22	1,468	4,205
23	1,466	4,197
24	1,469	4,205
25	1,464	4,203
26	1,471	4,199
27	1,463	4,195
28	1,471	4,207
29	1,462	4,207
30	1,477	4,194
31	1,461	4,204
32	1,472	4,207
33	1,475	4,201
34	1,470	4,209
35	1,477	4,208
36	1,475	4,191
37	1,472	4,211
38	1,469	4,192
39	1,475	4,200
40	1,468	4,201
41	1,473	4,197
42	1,471	4,193
43	1,472	4,198
44	1,468	4,194
45	1,471	4,199
46	1,469	4,197
47	1,472	4,201
48	1,472	4,195
49	1,468	4,201
50	1,472	4,200
Average	1,47	4,20
Cmk	4,97	7,39

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 2,5 mm^2

Nominal Cr. Height:	1,76	4,4	mm
+/-	0,05	0,1	mm

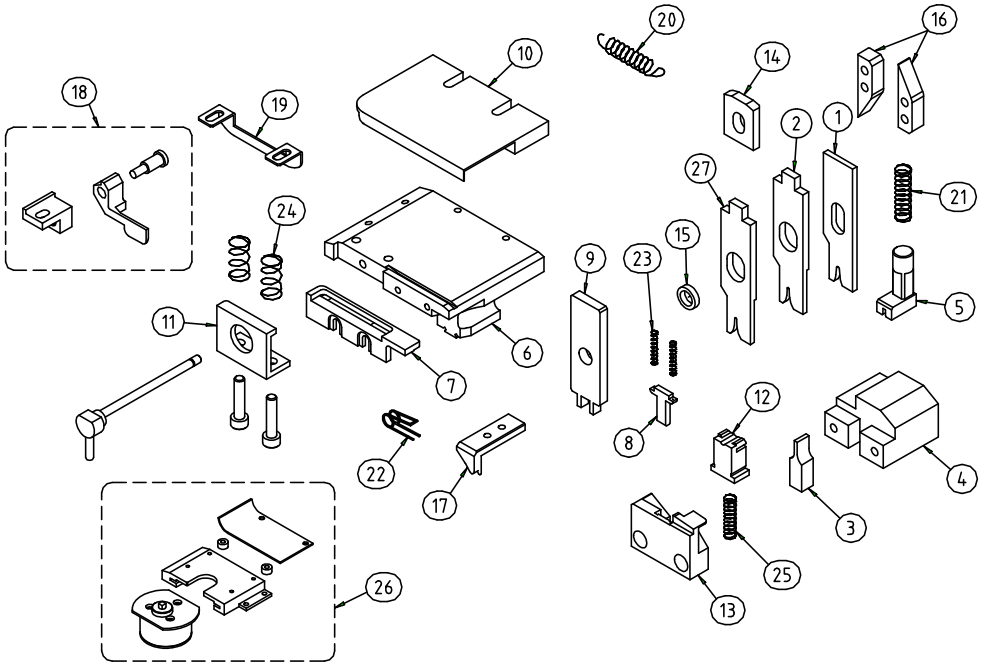
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,762	4,407
2	1,764	4,408
3	1,760	4,408
4	1,759	4,405
5	1,761	4,408
6	1,761	4,410
7	1,759	4,409
8	1,756	4,411
9	1,758	4,413
10	1,759	4,407
11	1,755	4,411
12	1,755	4,412
13	1,755	4,408
14	1,754	4,410
15	1,754	4,409
16	1,755	4,409
17	1,757	4,407
18	1,751	4,410
19	1,755	4,405
20	1,758	4,410
21	1,754	4,407
22	1,758	4,404
23	1,757	4,411
24	1,760	4,408
25	1,755	4,410
26	1,759	4,408
27	1,760	4,407
28	1,757	4,407
29	1,761	4,407
30	1,760	4,405
31	1,757	4,414
32	1,760	4,404
33	1,756	4,412
34	1,755	4,409
35	1,760	4,411
36	1,759	4,403
37	1,755	4,415
38	1,757	4,417
39	1,759	4,403
40	1,752	4,417
41	1,756	4,403
42	1,756	4,417
43	1,755	4,418
44	1,755	4,402
45	1,755	4,414
46	1,754	4,406
47	1,755	4,415
48	1,758	4,416
49	1,750	4,410
50	1,759	4,410
Average	1,76	4,41
Cmk	5,45	7,51

Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	ZZ	TERMINAL No. 端子品番	7116-1906 DD
共通品番	– / –	– / –	– / –



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-1906ZZXW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-1906ZZXID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-1906ZZXAD		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7116-1906XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-1906XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-1906XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-1906XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	001	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	004	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-1906XKP		BRACKET ブラケット
12	48A19049	002	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27	~~7116-1906XQ~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	003	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	015	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	032	BUSH ﾌﾞｯｼｭ	14	48A47042	002	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	005	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					YWTL		
					DESIGNED DATE 設計日		
					17-08-2016		
					APPROVED 承認	DESIGNED 設計	
					S.Junior	C.F.Almeida	
					17-08-2016	17-08-2016	