APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1709E129

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164157 SEQUENCE Nº 1

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-4157-02	*	**04 SIDE FEED**	**SD-DAIMLER SFTP XVK**	*







Anvil		
7116-4157XA		(A)
CW (c) 2,02	*CW (i)* 2,50	





Wire Crimper		
7116-4157XW		(N)
CW 2,00		

Insulation Crimper		
7116-4157XI		(A)
CW 2,50		

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

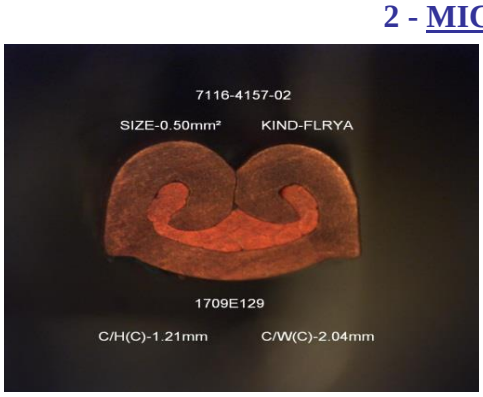
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

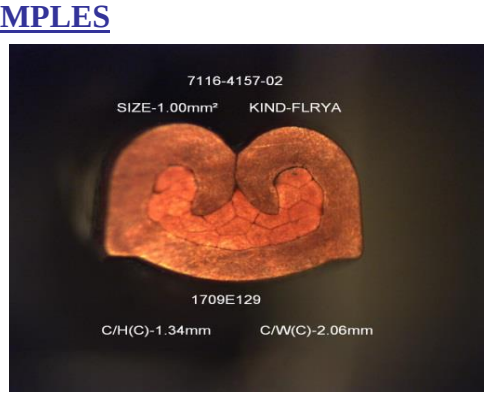
	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,2	1,20	4,73
	+/-0.05		



	NOMINAL	AVERAGE	Cmk
mm	1,35	1,35	4,93
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm²
Wire 0.50mm² C/W(I)-2.53mm
Wire 1.00mm² C/W(I)-2.56mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
		
Date: 2017-out-19	Date: 2017-out-19	Date: 2017-out-18

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1709E129

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,5 mm^2

Nominal Cr. Height:	1,2	2,15	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,204	2,150
2	1,203	2,153
3	1,206	2,152
4	1,205	2,153
5	1,201	2,149
6	1,201	2,151
7	1,199	2,146
8	1,198	2,152
9	1,198	2,151
10	1,203	2,149
11	1,198	2,147
12	1,201	2,150
13	1,199	2,146
14	1,201	2,150
15	1,196	2,153
16	1,202	2,141
17	1,200	2,145
18	1,201	2,144
19	1,202	2,144
20	1,198	2,154
21	1,202	2,156
22	1,199	2,156
23	1,201	2,150
24	1,203	2,154
25	1,200	2,152
26	1,203	2,150
27	1,205	2,150
28	1,205	2,153
29	1,200	2,150
30	1,200	2,152
31	1,199	2,148
32	1,198	2,152
33	1,200	2,145
34	1,196	2,150
35	1,196	2,151
36	1,197	2,149
37	1,196	2,154
38	1,197	2,160
39	1,201	2,152
40	1,197	2,146
41	1,198	2,147
42	1,197	2,146
43	1,199	2,150
44	1,198	2,148
45	1,194	2,153
46	1,196	2,150
47	1,189	2,151
48	1,198	2,143
49	1,195	2,140
50	1,190	2,144
Average	1,20	2,15
Cmk	4,73	8,39

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1,35	2,75	mm
+/-	0,05	0,1	mm

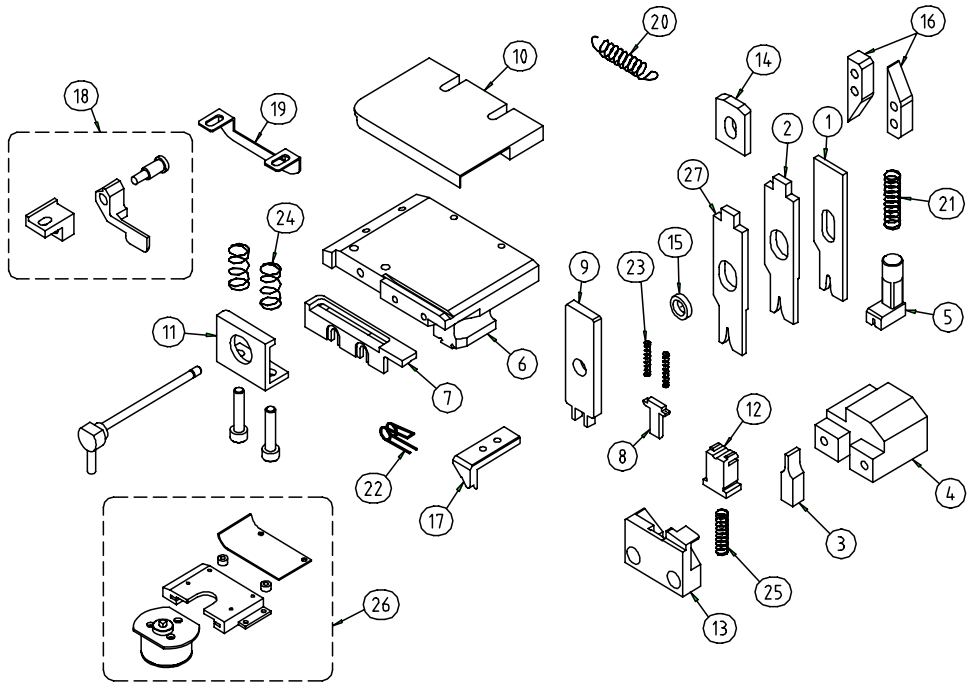
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,351	2,750
2	1,351	2,753
3	1,353	2,752
4	1,355	2,749
5	1,354	2,745
6	1,354	2,749
7	1,353	2,750
8	1,358	2,749
9	1,359	2,750
10	1,357	2,749
11	1,354	2,749
12	1,354	2,748
13	1,353	2,748
14	1,356	2,748
15	1,354	2,748
16	1,358	2,749
17	1,351	2,744
18	1,354	2,749
19	1,360	2,746
20	1,353	2,749
21	1,356	2,744
22	1,356	2,747
23	1,355	2,742
24	1,355	2,744
25	1,349	2,741
26	1,351	2,744
27	1,355	2,746
28	1,357	2,746
29	1,359	2,745
30	1,357	2,744
31	1,357	2,744
32	1,355	2,744
33	1,351	2,741
34	1,350	2,743
35	1,352	2,740
36	1,349	2,743
37	1,351	2,740
38	1,351	2,744
39	1,351	2,737
40	1,354	2,739
41	1,352	2,741
42	1,352	2,742
43	1,345	2,740
44	1,354	2,744
45	1,355	2,742
46	1,354	2,741
47	1,355	2,736
48	1,357	2,746
49	1,355	2,738
50	1,346	2,742
Average	1,35	2,74
Cmk	4,93	7,92

Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1500	TERMINAL No. 端子品番	7116-4157
Common PN 共通品番	-	-	-
	-	-	



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-4157XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-4157XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-4157XA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7116-4157XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-4157XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-4157XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-4157XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-4157XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	002①	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27			
13	48A47025	002①	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	<OPTION ｵﾌﾟｼｮﾝ>			
14	48A19007	024	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	020	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	
					HIB	
					DESIGNED DATE 設計日	
					2007/6/20	
	2013/06/14	PTC			APPROVED 承認	DESIGNED 設計
①	2007/7/9	001→002,021→025	QX7	T.Suzuki	K.Hiraguchi	T.Suzuki
					2007/6/20	2007/6/20

ISSUED '10.05.31 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED 発行