APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1709E133

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71142575 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7114-2575-06	*	**04 SIDE FEED**	**D-DAIMLER SFTP XVK**	*







Anvil		
7114-2575XA		(N)
CW (c) 1,97	*CW (i)* 2,45	




Wire Crimper		
7114-2575XW		(N)
CW 1,95		

Insulation Crimper		
7114-2575XI		(N)
CW 2,45		

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

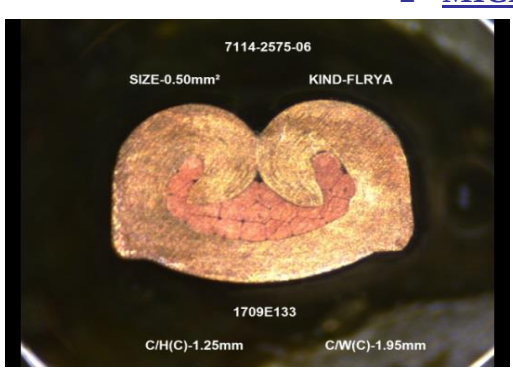
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

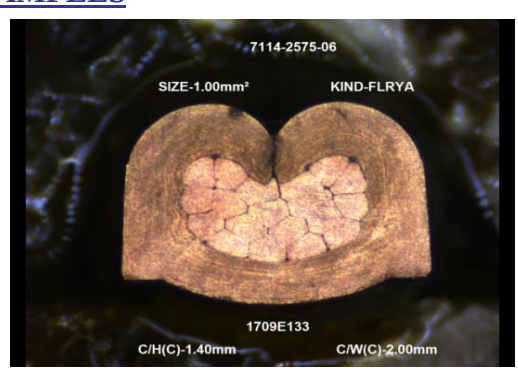
(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.25	1.25	3.63
	+/-0.05		



	NOMINAL	AVERAGE	Cmk
mm	1.4	1.40	3.44
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm².
Size 0.50mm² C/W(I)-2.32mm
Size 0.85mm² C/W(I)-2.49mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18597
		
Date: 2017/Oct/18	Date: 2017/Oct/17	Date: 2017/Oct/17

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1709E133

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0.5 mm^2

Nominal Cr. Height:	1.25	2	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.251	2.001
2	1.250	1.997
3	1.254	2.004
4	1.252	1.998
5	1.251	2.007
6	1.255	2.000
7	1.251	2.003
8	1.250	2.000
9	1.253	2.000
10	1.250	1.998
11	1.251	2.003
12	1.249	2.000
13	1.250	1.996
14	1.250	1.997
15	1.252	2.009
16	1.250	2.014
17	1.251	2.014
18	1.253	2.003
19	1.248	1.998
20	1.251	2.001
21	1.257	2.006
22	1.254	2.003
23	1.248	2.005
24	1.244	2.010
25	1.251	2.000
26	1.254	1.994
27	1.249	2.002
28	1.246	2.011
29	1.249	2.003
30	1.249	2.005
31	1.249	1.996
32	1.249	2.004
33	1.251	2.006
34	1.250	2.007
35	1.251	2.004
36	1.247	2.007
37	1.250	2.012
38	1.251	2.008
39	1.248	1.999
40	1.259	2.010
41	1.262	2.005
42	1.265	2.001
43	1.250	1.999
44	1.252	1.999
45	1.233	2.001
46	1.246	2.000
47	1.246	1.998
48	1.253	2.004
49	1.251	2.000
50	1.253	1.999
Average	1.25	2.00
Cmk	3.63	6.77

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1.4	2.4	mm
+/-	0.05	0.1	mm

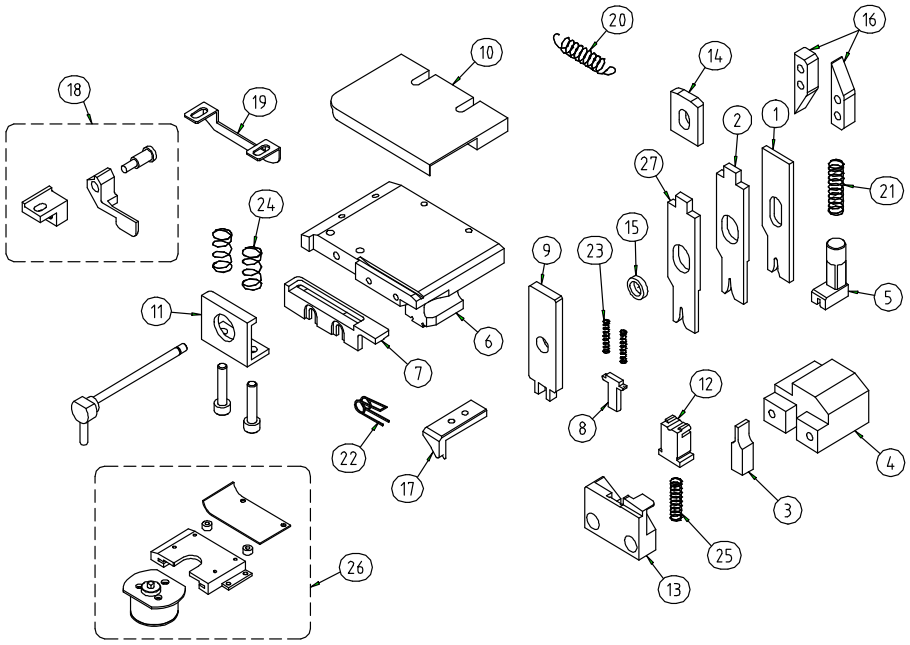
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.401	2.401
2	1.398	2.399
3	1.399	2.402
4	1.404	2.405
5	1.398	2.400
6	1.397	2.397
7	1.397	2.399
8	1.400	2.397
9	1.402	2.410
10	1.404	2.419
11	1.400	2.409
12	1.396	2.404
13	1.400	2.404
14	1.406	2.408
15	1.398	2.395
16	1.396	2.408
17	1.409	2.406
18	1.408	2.402
19	1.400	2.401
20	1.405	2.398
21	1.401	2.396
22	1.409	2.400
23	1.404	2.399
24	1.410	2.399
25	1.401	2.402
26	1.420	2.401
27	1.403	2.397
28	1.408	2.404
29	1.399	2.400
30	1.399	2.401
31	1.399	2.395
32	1.403	2.392
33	1.399	2.397
34	1.398	2.396
35	1.402	2.398
36	1.402	2.396
37	1.403	2.401
38	1.397	2.398
39	1.397	2.399
40	1.401	2.396
41	1.404	2.401
42	1.399	2.401
43	1.399	2.393
44	1.403	2.402
45	1.400	2.398
46	1.412	2.399
47	1.406	2.396
48	1.405	2.397
49	1.403	2.400
50	1.403	2.397
Average	1.40	2.40
Cmk	3.44	6.96

Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-4477	TERMINAL No. 端子品番	7114-2575
Common PN 共通品番	–	–	–
	–	–	



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7114-2575XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7114-2575XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7114-2575XA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7114-2575XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7114-2575XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7114-2575XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7114-2575XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7114-2575XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	021 ①	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	7114-2575XP ①		OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	021	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	7214-1841XP-B		OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
15	48A19019	030	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPROVED 承認	DESIGNED 設計
①	2008/3/4	CHANGED PARTS No,	08C-005	T,Suzuki	T,Maki	T,Suzuki

APPRICATION POST 申請部署: HIB

DESIGNED DATE 設計日: 2008/1/29

ISSUED 発行: 2008/1/29

ISSUE 2013 / 10 / 12
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.