APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1709E134

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71142575 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7114-2575-06	*	**04 SIDE FEED**	**SD-DAIMLER SFTP XVK**	*







Anvil		
7114-2575XA		(N)
CW (c) 1,97	*CW (i)* 2,45	





Wire Crimper		
7114-2575XW		(N)
CW 1,95		

Insulation Crimper		
7114-2575XI		(N)
CW 2,45		

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

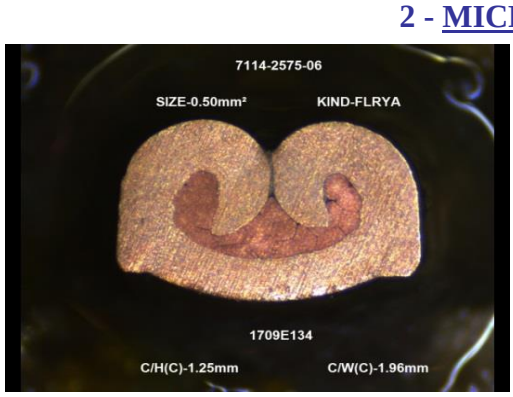
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

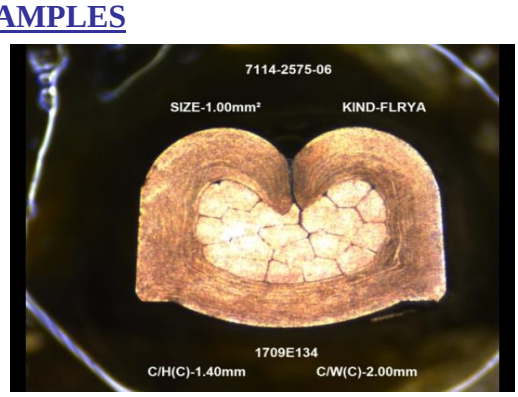
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.25	1.25	3.22
	+/-0.05		



	NOMINAL	AVERAGE	Cmk
mm	1.4	1.40	3.50
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm².
Size 0.50mm² C/W(I)-2.32mm
Size 0.85mm² C/W(I)-2.49mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18597
		
Date: 2017/Oct/18	Date: 2017/Oct/17	Date: 2017/Oct/17

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1709E134

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0.5 mm^2

Nominal Cr. Height:	1.25	2	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.249	2.000
2	1.253	1.999
3	1.245	1.997
4	1.251	1.991
5	1.252	1.996
6	1.248	2.001
7	1.255	2.004
8	1.256	2.007
9	1.255	1.998
10	1.249	1.996
11	1.251	1.998
12	1.253	2.007
13	1.253	2.001
14	1.250	2.001
15	1.251	1.996
16	1.248	2.004
17	1.253	2.003
18	1.253	2.004
19	1.254	2.001
20	1.252	1.998
21	1.246	2.004
22	1.253	2.000
23	1.247	1.996
24	1.247	2.002
25	1.247	1.997
26	1.249	2.001
27	1.253	2.005
28	1.252	2.003
29	1.253	2.006
30	1.258	2.008
31	1.256	2.004
32	1.246	2.005
33	1.257	2.012
34	1.257	1.992
35	1.253	2.001
36	1.253	2.006
37	1.249	2.000
38	1.257	2.002
39	1.247	2.006
40	1.254	2.006
41	1.262	2.007
42	1.269	2.004
43	1.262	2.004
44	1.255	1.999
45	1.254	1.997
46	1.257	2.001
47	1.255	2.001
48	1.251	1.998
49	1.256	2.002
50	1.239	1.998
Average	1.25	2.00
Cmk	3.22	7.84

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1.4	2.4	mm
+/-	0.05	0.1	mm

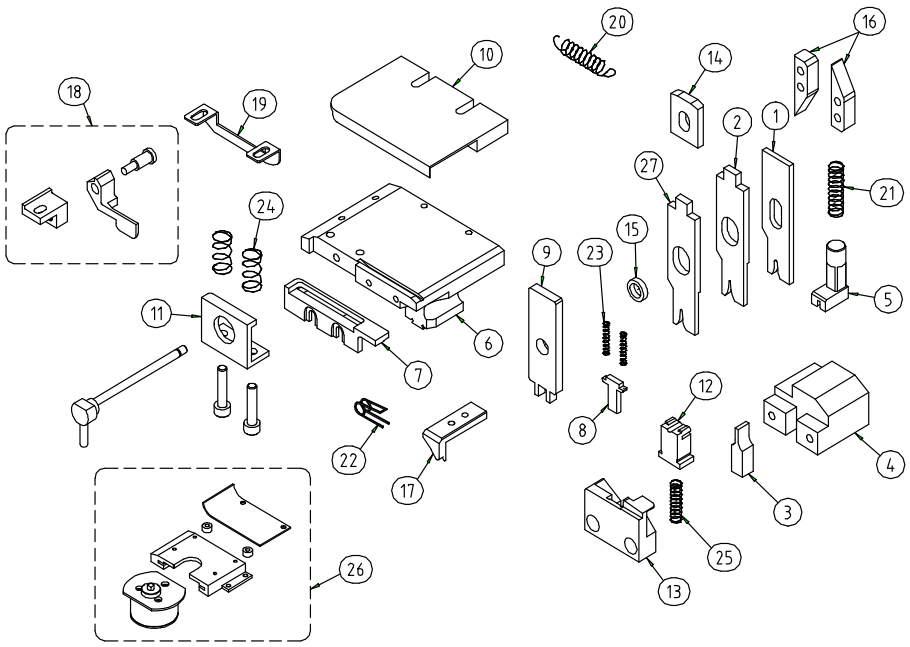
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.401	2.394
2	1.395	2.398
3	1.400	2.402
4	1.396	2.400
5	1.406	2.402
6	1.399	2.402
7	1.397	2.398
8	1.392	2.408
9	1.394	2.394
10	1.406	2.405
11	1.412	2.409
12	1.417	2.411
13	1.409	2.402
14	1.404	2.406
15	1.402	2.399
16	1.405	2.401
17	1.409	2.401
18	1.403	2.401
19	1.398	2.399
20	1.405	2.395
21	1.406	2.403
22	1.398	2.400
23	1.397	2.405
24	1.400	2.404
25	1.401	2.401
26	1.404	2.405
27	1.401	2.403
28	1.403	2.408
29	1.407	2.405
30	1.405	2.402
31	1.405	2.399
32	1.406	2.398
33	1.404	2.402
34	1.400	2.405
35	1.400	2.409
36	1.402	2.410
37	1.398	2.401
38	1.399	2.408
39	1.400	2.402
40	1.399	2.398
41	1.405	2.398
42	1.399	2.394
43	1.404	2.397
44	1.403	2.400
45	1.405	2.398
46	1.401	2.400
47	1.398	2.397
48	1.399	2.402
49	1.400	2.404
50	1.402	2.404
Average	1.40	2.40
Cmk	3.50	7.82

Acceptance criteria: Cmk>= 2.0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-4477	TERMINAL No. 端子品番	7114-2575
Common PN 共通品番	–	–	–
	–	–	



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7114-2575XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7114-2575XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7114-2575XA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7114-2575XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7114-2575XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7114-2575XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7114-2575XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7114-2575XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	021 ①	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	7114-2575XP ①		OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	021	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	7214-1841XP-B		OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
15	48A19019	030	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
①	2008/3/4	CHANGED PARTS No,	08C-005	T,Suzuki

APPRICATION POST 申請部署	
HIB	
DESIGNED DATE 設計日	
2008/1/29	
APPROVED 承認	DESIGNED 設計
T,Maki	T,Suzuki
2008/1/29	2008/1/29

ISSUED 発行

ISSUE
2013 / 10 / 12
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.