PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E372

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71142212 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7114-2212-02	*	**04 SIDE FEED**	**YSD-PO_25ENG_2017_1**	*







Anvil			(N)
7114-2212XA			
CW (c)	2,82	*CW (i)*	3,40





Wire Crimper		(N)
7114-2212XW		
CW	2,80	

Insulation Crimper		(N)
7114-2212XI		
CW	3,40	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

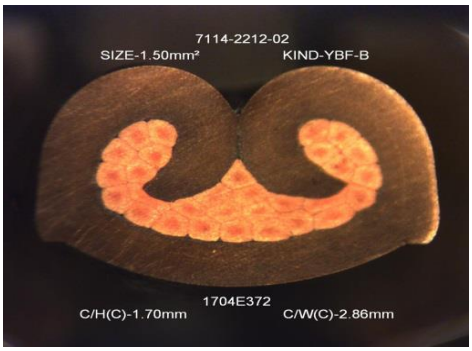
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.7	1.70	4.19
	+/-0.05		



	NOMINAL	AVERAGE	Cmk
mm	1.95	1.95	5.16
	+/-0.05		

REMARKS:

Aplicable Wire Range 1.50mm²~2.50mm²
Wire 1.50mm² C/W(I)-3.21mm
Wire 2.50mm² C/W(I)-3.92mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 678
		
Date: 2017-mai-16	Date: 2017-mai-15	Date: 2017-mai-13

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E372

LOWER WIRE KIND & SIZE

Wire kind: YBF-B

Total wire size: 1.5 mm^2

Nominal Cr. Height:	1.7	2.8	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.701	2.801
2	1.698	2.797
3	1.705	2.800
4	1.702	2.803
5	1.701	2.805
6	1.708	2.803
7	1.701	2.802
8	1.708	2.806
9	1.712	2.807
10	1.704	2.802
11	1.706	2.802
12	1.705	2.810
13	1.704	2.801
14	1.701	2.803
15	1.705	2.810
16	1.709	2.803
17	1.711	2.800
18	1.700	2.798
19	1.705	2.798
20	1.704	2.800
21	1.701	2.804
22	1.705	2.806
23	1.705	2.800
24	1.702	2.803
25	1.701	2.805
26	1.708	2.803
27	1.701	2.802
28	1.708	2.806
29	1.712	2.807
30	1.704	2.802
31	1.706	2.802
32	1.705	2.810
33	1.704	2.801
34	1.701	2.803
35	1.705	2.810
36	1.709	2.803
37	1.711	2.800
38	1.700	2.798
39	1.708	2.798
40	1.709	2.800
41	1.707	2.806
42	1.705	2.800
43	1.702	2.803
44	1.701	2.805
45	1.708	2.803
46	1.701	2.802
47	1.708	2.806
48	1.712	2.807
49	1.704	2.802
50	1.706	2.802
Average	1.70	2.80
Cmk	4.19	9.91

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 2.5 mm^2

Nominal Cr. Height:	1.95	3.3	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.952	3.305
2	1.955	3.306
3	1.958	3.308
4	1.957	3.309
5	1.951	3.303
6	1.954	3.302
7	1.954	3.299
8	1.956	3.297
9	1.960	3.294
10	1.956	3.302
11	1.954	3.305
12	1.953	3.306
13	1.951	3.309
14	1.950	3.309
15	1.952	3.302
16	1.954	3.299
17	1.955	3.297
18	1.958	3.303
19	1.954	3.308
20	1.954	3.309
21	1.959	3.305
22	1.960	3.306
23	1.959	3.308
24	1.956	3.309
25	1.954	3.303
26	1.952	3.296
27	1.952	3.305
28	1.955	3.306
29	1.958	3.308
30	1.957	3.309
31	1.951	3.303
32	1.954	3.301
33	1.954	3.303
34	1.956	3.310
35	1.957	3.302
36	1.952	3.296
37	1.950	3.305
38	1.948	3.305
39	1.949	3.306
40	1.951	3.301
41	1.954	3.301
42	1.956	3.310
43	1.959	3.300
44	1.952	3.299
45	1.955	3.294
46	1.958	3.305
47	1.957	3.306
48	1.951	3.308
49	1.954	3.309
50	1.954	3.303
Average	1.95	3.30
Cmk	5.16	7.38

Acceptance criteria: Cmk>= 2.0

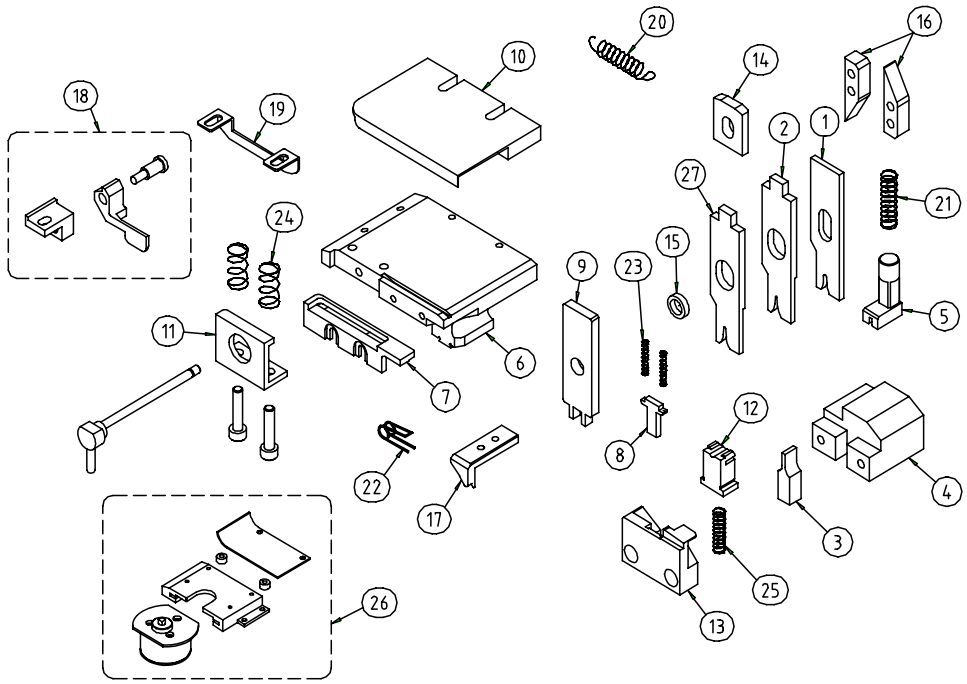
Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-1056	TERMINAL No. 端子品番	7114-2212

Common PN 共通品番	–	–	–	–
	–	–		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7114-2212XW		WIRE CRIMPER ワイヤークリンパー
2	7114-2212XI		INSULATION CRIMPER インシュレーションクリンパー
3	7114-2212XA		ANVIL アンビル
4	7114-2212XJE		ANVIL HOLDER アンビルホルダー
5	7114-2212XYY		SUPPORTING STOPPER サポーティングストッパー
6	7114-2212XYB		BASE ベース
7	7114-2212XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB
8	48A47016	001	WIRE HOLDER 電線押さえ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー
10	48A47020	A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ
12	7114-2212PS		SHEARBLADE シャーブレード
13	7114-2212XP		OUTER SHEARBLADE アウターシャーブレード
14	48A19007	022	INSULATION ADJUSTING PIECE インシュレーション調整コマ
15	48A19019	037	BUSH ブッシュ
16	48A47014	005	FEEDING CAM 送りカム

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
17	48A47013	001	FEEDING CLAW 送り爪
18	48A19100	005	WIRE STOPPER Assy 電線ストッパー アッシー
19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しスプリング
21	48A47032	001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
	7116-8298XKP		BRACKET ブラケット
27			~~STABILIZER CRIMPER スタビライザークリンパー~~
〈OPTION オプション〉			
13	7114-2212XP-B		OUTER SHEARBLADE アウターシャーブレード
14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検

APPRICATION POST 申請部署	
QX7	
DESIGNED DATE 設計日	
2011/5/16	
APPROVED 承認	DESIGNED 設計
T,Maki	K.Muramatsu
2011/5/16	2011/5/16

ISSUED 発行

ISSUE
2013/12/24
YAZAKI PARTS CO.LTD HAIBARA OFFICE