APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E373

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71146479 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7114-6479-06	**7157-3036-60**	**04 SIDE FEED**	**YSD_2018_001~008**	*







Anvil		
7114-6479ZZXAD		(N)
CW (c) 1,80	*CW (i)* 3,30	




Wire Crimper	
7114-6479ZZXW	(N)
CW 1,78	

Insulation Crimper	
7114-6479ZZXID	(N)
CW 3,30	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

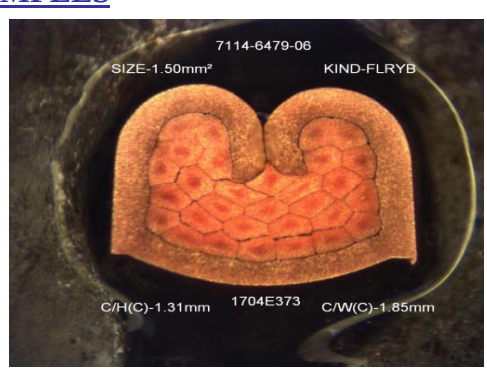
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,1	1,10	5,27
	+/-0,05		



	NOMINAL	AVERAGE	Cmk
mm	1,31	1,31	4,51
	+/-0,05		

REMARKS:

Aplicable Wire Range 1.00mm²~1.50mm²
Wire 1.00mm² C/W(I)-3.42mm
Wire 1.50mm² C/W(I)-3.44mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 678
		
Date: 2018-abr-16	Date: 2018-abr-13	Date: 2018-abr-13

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E373

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 1 mm^2

Nominal Cr. Height:	1,1	3,4	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,103	3,405
2	1,106	3,416
3	1,103	3,407
4	1,106	3,404
5	1,107	3,397
6	1,104	3,402
7	1,103	3,405
8	1,101	3,393
9	1,105	3,395
10	1,109	3,401
11	1,107	3,407
12	1,104	3,410
13	1,107	3,405
14	1,103	3,402
15	1,103	3,391
16	1,107	3,396
17	1,111	3,409
18	1,107	3,407
19	1,104	3,397
20	1,107	3,395
21	1,102	3,401
22	1,101	3,404
23	1,104	3,408
24	1,108	3,409
25	1,105	3,401
26	1,102	3,397
27	1,101	3,397
28	1,105	3,403
29	1,109	3,410
30	1,110	3,411
31	1,104	3,406
32	1,103	3,400
33	1,108	3,396
34	1,108	3,394
35	1,104	3,408
36	1,102	3,409
37	1,100	3,411
38	1,099	3,403
39	1,101	3,400
40	1,103	3,404
41	1,105	3,409
42	1,106	3,411
43	1,103	3,407
44	1,101	3,400
45	1,103	3,400
46	1,105	3,406
47	1,109	3,411
48	1,110	3,414
49	1,102	3,411
50	1,105	3,403
Average	1,10	3,40
Cmk	5,27	5,42

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 1,5 mm^2

Nominal Cr. Height:	1,31	3,5	mm
+/-	0,05	0,1	mm

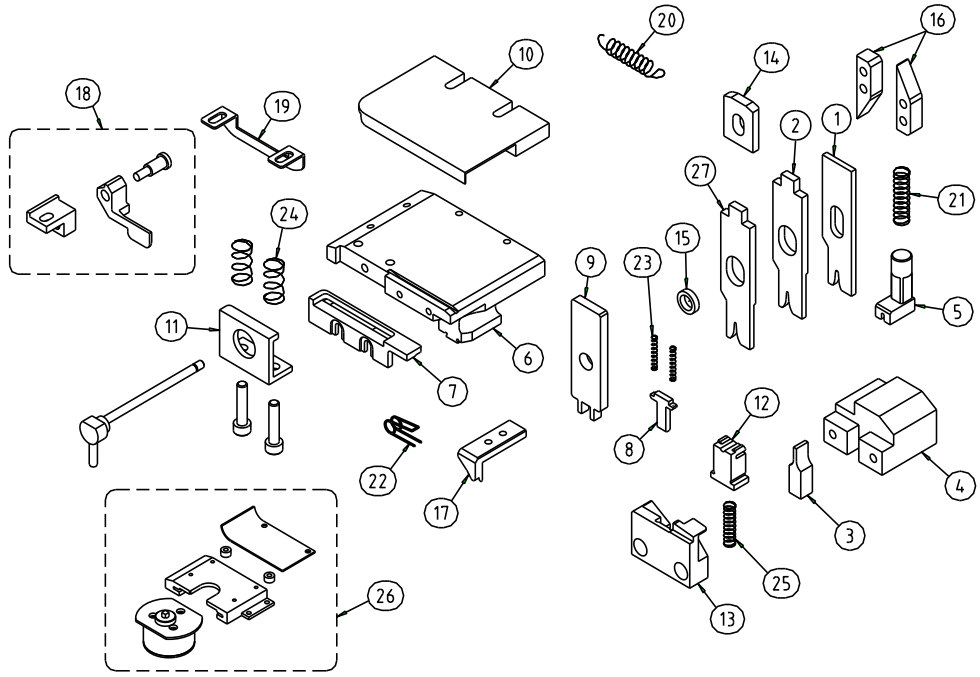
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,312	3,506
2	1,321	3,513
3	1,315	3,510
4	1,314	3,499
5	1,320	3,511
6	1,317	3,504
7	1,316	3,504
8	1,314	3,508
9	1,310	3,512
10	1,311	3,508
11	1,317	3,502
12	1,321	3,500
13	1,315	3,501
14	1,313	3,506
15	1,311	3,511
16	1,311	3,515
17	1,315	3,507
18	1,318	3,501
19	1,314	3,499
20	1,310	3,496
21	1,309	3,500
22	1,313	3,507
23	1,316	3,509
24	1,318	3,509
25	1,314	3,505
26	1,312	3,509
27	1,316	3,512
28	1,321	3,514
29	1,315	3,505
30	1,312	3,503
31	1,311	3,502
32	1,315	3,501
33	1,318	3,510
34	1,319	3,511
35	1,314	3,500
36	1,311	3,499
37	1,311	3,495
38	1,315	3,507
39	1,318	3,508
40	1,318	3,497
41	1,314	3,502
42	1,309	3,509
43	1,309	3,513
44	1,315	3,508
45	1,321	3,504
46	1,313	3,506
47	1,313	3,510
48	1,316	3,513
49	1,318	3,504
50	1,315	3,501
Average	1,31	3,51
Cmk	4,51	6,17

Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	ZZ	TERMINAL No. 端子品番	7114-6479 DD
共通品番	– – – – – –		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7114-6479ZZXW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7114-6479ZZXID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7114-6479ZZXAD		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7114-6479ZZXJE ①		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7114-6479XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7114-6479XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7114-6479XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7114-6479XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27	~~7114-6479XQ~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	002	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	017	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	027	BUSH ﾌﾞｯｼｭ	14	48A47042	002	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	
					YTU	
					DESIGNED DATE 設計日	
					04-01-2017	
					APPROVED 承認	DESIGNED 設計
①	13-03-2018	7114-6479XJE → 7114-6479ZZXJE	PTC	C.F.Almeida	S.Junior	C.F.Almeida
					04-01-2017	04-01-2017

ISSUED 発行