PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E377

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71165406 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-5406-02	*	**04 SIDE FEED**	**YSD-PO-25 ENG/2017_1**	*







Anvil		
7116-5406XAC		(N)
CW (c) 2.71	*CW (i)* 3.46	






Wire Crimper	
7116-5406XW	(1)
CW 2.69	

Insulation Crimper	
7116-5406XIC	(1)
CW 3.46	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

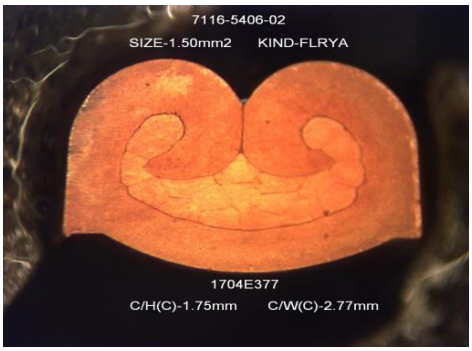
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

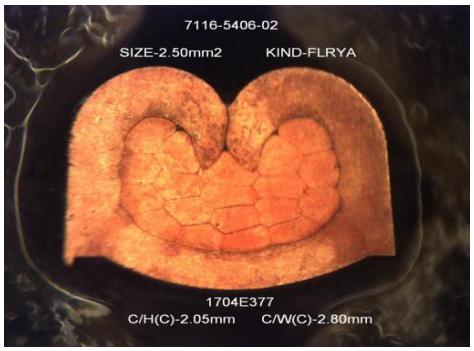
	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.75	1.75	4.91
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	2.05	2.06	4.92
	+/-0.05		

REMARKS:

Aplicable wire range- >1.00~2.50mm2
Size 1.50mm2 C/W(I)-3.53mm
Size 2.50mm2 C/W(I)-3.55mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
Date: 2017-mai-09	Date: 2017-mai-09	Date: 2017-mai-09

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E377

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1.5 mm^2

Nominal Cr. Height:	1.75	3.1	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.756	3.100
2	1.752	3.104
3	1.750	3.096
4	1.754	3.094
5	1.755	3.101
6	1.758	3.102
7	1.753	3.106
8	1.749	3.106
9	1.747	3.098
10	1.748	3.094
11	1.748	3.097
12	1.752	3.097
13	1.749	3.102
14	1.746	3.099
15	1.744	3.094
16	1.745	3.091
17	1.747	3.096
18	1.748	3.098
19	1.751	3.101
20	1.749	3.097
21	1.747	3.094
22	1.745	3.091
23	1.747	3.094
24	1.748	3.096
25	1.750	3.100
26	1.752	3.096
27	1.755	3.092
28	1.751	3.090
29	1.746	3.094
30	1.747	3.098
31	1.751	3.101
32	1.754	3.101
33	1.749	3.096
34	1.748	3.093
35	1.747	3.092
36	1.747	3.097
37	1.750	3.097
38	1.755	3.101
39	1.750	3.096
40	1.747	3.093
41	1.745	3.097
42	1.746	3.099
43	1.751	3.096
44	1.754	3.093
45	1.750	3.091
46	1.748	3.095
47	1.744	3.096
48	1.746	3.099
49	1.751	3.093
50	1.747	3.090
Average	1.75	3.10
Cmk	4.91	8.21

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 2.5 mm^2

Nominal Cr. Height:	2.05	3.5	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2.057	3.496
2	2.059	3.500
3	2.057	3.503
4	2.054	3.506
5	2.054	3.499
6	2.055	3.494
7	2.059	3.501
8	2.057	3.504
9	2.054	3.507
10	2.051	3.502
11	2.052	3.496
12	2.056	3.497
13	2.059	3.500
14	2.058	3.503
15	2.056	3.505
16	2.054	3.499
17	2.051	3.494
18	2.052	3.499
19	2.058	3.500
20	2.056	3.504
21	2.054	3.503
22	2.050	3.498
23	2.052	3.495
24	2.055	3.492
25	2.059	3.497
26	2.059	3.500
27	2.056	3.503
28	2.054	3.505
29	2.053	3.501
30	2.055	3.497
31	2.059	3.494
32	2.064	3.500
33	2.060	3.501
34	2.058	3.504
35	2.054	3.508
36	2.052	3.501
37	2.058	3.497
38	2.060	3.493
39	2.056	3.497
40	2.054	3.502
41	2.051	3.505
42	2.052	3.501
43	2.055	3.497
44	2.060	3.497
45	2.057	3.502
46	2.055	3.504
47	2.052	3.500
48	2.053	3.496
49	2.058	3.494
50	2.055	3.498
Average	2.06	3.50
Cmk	4.92	8.54

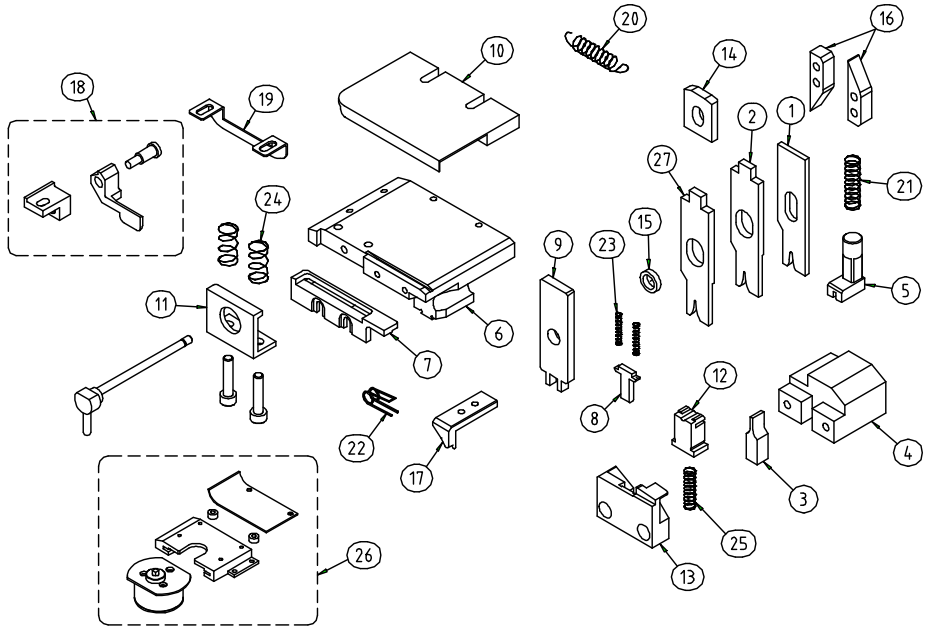
Acceptance criteria: Cmk>= 2

Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-4692	TERMINAL No. 端子品番	7116-5406 C
共通品番	- -	- -	- -



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-5406XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ
2	7116-5406XIC		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ
3	7116-5406XAC		ANVIL ｱﾝﾋﾞﾙ
4	7116-5406XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ
5	7116-5406XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ
6	7116-5406XYB		BASE ﾍﾞｰｽ
7	7116-5406XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB
8	48A47016	-001	WIRE HOLDER 電線押さえ
9	48A47017	-002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ
10	48A47020	-A05	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA
11	48A47022	-001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ
12	48A47024	-002	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄ
13	48A47025	-002	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄ
14	48A19007	-023	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ
15	48A19019	-016	BUSH ﾌﾞｯｼｭ
16	48A47014	-005	FEEDING CAM 送りｶﾑ

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
17	48A47013	-001	FEEDING CLAW 送り爪
18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
19	48A19047	-003	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
23	48A19023	-002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄｽﾌﾟﾘﾝｸﾞ
26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
	7116-5406XKP		BRACKET ﾌﾗｹｯﾄ
27	~~7116-5406XQ~~		~~STABILIZER CRIMPER~~ ~~ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
〈OPTION ｵﾌﾟｼｮﾝ〉			
13	48A47025	-101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄ
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検

APPRICATION POST 申請部署	
YWTC	
DESIGNED DATE 設計日	
28-10-2008	
APPROVED 承認	DESIGNED 設計
T, Maki	C. Almeida
28-10-2008	28-10-2008

ISSUED 発行