PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E379







TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71125087 SEQUENCE Nº 2






Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7112-5087-08	*	**04 SIDE FEED**	**YSD-PO 25ENG/2017**	*

Anvil			Wire Crimper			Insulation Crimper		
7112-5087XA		(N)	7112-5087XW		(N)	7112-5087XI		(N)
CW (c)	1.32	*CW (i)* 1.85	*CW*	1.30		*CW*	1.85	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

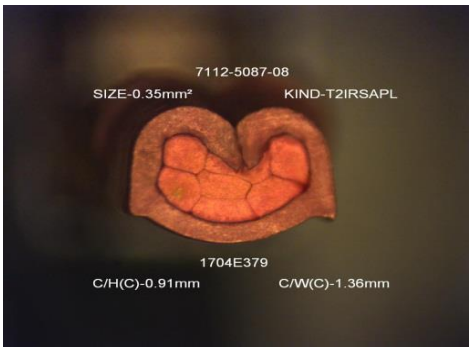
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

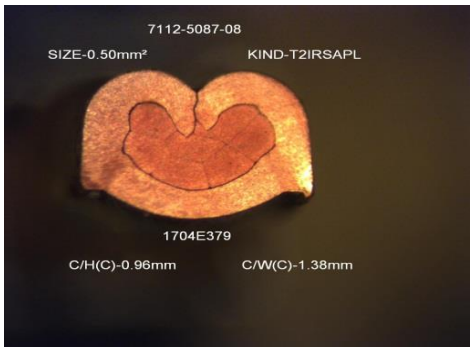
	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.9	0.90	4.73
	+/-0,05		



	NOMINAL	AVERAGE	Cmk
mm	0.95	0.95	4.82
	+/-0,05		

REMARKS:

Aplicable wire range 0.20mm²~0.60mm²
The wire size 0.22mm² is not recommended due to crimping microcut conditions
Wire 0.35mm² C/W(I)-1.76mm
Wire 0.50mm² C/W(I)-1.79mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
		
Date: 2017-mai-09	Date: 2017-mai-06	Date: 2017-mai-05

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E379

LOWER WIRE KIND & SIZE

Wire kind: T2IRSAPL
Total wire size: 0,35 mm^2

Nominal Cr. Height:	0.9	1.5	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0.902	1.504
2	0.903	1.506
3	0.901	1.505
4	0.903	1.502
5	0.899	1.502
6	0.898	1.501
7	0.901	1.502
8	0.900	1.501
9	0.901	1.503
10	0.905	1.504
11	0.905	1.502
12	0.904	1.506
13	0.906	1.503
14	0.906	1.502
15	0.903	1.503
16	0.903	1.506
17	0.906	1.508
18	0.908	1.498
19	0.906	1.499
20	0.905	1.501
21	0.901	1.500
22	0.905	1.506
23	0.904	1.505
24	0.897	1.503
25	0.900	1.504
26	0.900	1.503
27	0.901	1.501
28	0.909	1.495
29	0.900	1.495
30	0.901	1.500
31	0.910	1.497
32	0.908	1.498
33	0.906	1.499
34	0.902	1.496
35	0.903	1.500
36	0.904	1.503
37	0.909	1.504
38	0.909	1.499
39	0.910	1.504
40	0.904	1.498
41	0.903	1.498
42	0.897	1.496
43	0.898	1.495
44	0.901	1.497
45	0.902	1.495
46	0.904	1.495
47	0.905	1.497
48	0.903	1.486
49	0.903	1.485
50	0.901	1.488
Average	0.90	1.50
Cmk	4.73	6.78

UPPER WIRE KIND & SIZE

Wire kind: T2IRSAPL
Total wire size: 0,5 mm^2

Nominal Cr. Height:	0.95	1.8	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0.950	1.799
2	0.950	1.804
3	0.954	1.798
4	0.946	1.804
5	0.946	1.802
6	0.945	1.804
7	0.944	1.799
8	0.946	1.797
9	0.947	1.796
10	0.948	1.804
11	0.948	1.803
12	0.952	1.806
13	0.953	1.803
14	0.955	1.799
15	0.952	1.801
16	0.954	1.802
17	0.957	1.803
18	0.952	1.798
19	0.954	1.800
20	0.955	1.794
21	0.953	1.792
22	0.950	1.799
23	0.954	1.793
24	0.948	1.792
25	0.950	1.798
26	0.951	1.802
27	0.954	1.794
28	0.950	1.792
29	0.952	1.793
30	0.953	1.786
31	0.948	1.792
32	0.947	1.796
33	0.948	1.798
34	0.947	1.799
35	0.949	1.793
36	0.945	1.796
37	0.948	1.800
38	0.943	1.800
39	0.947	1.802
40	0.949	1.800
41	0.945	1.796
42	0.945	1.805
43	0.949	1.800
44	0.951	1.799
45	0.954	1.803
46	0.949	1.797
47	0.952	1.804
48	0.954	1.799
49	0.955	1.806
50	0.952	1.799
Average	0.95	1.80
Cmk	4.82	7.53

Acceptance criteria: Cmk>= 2

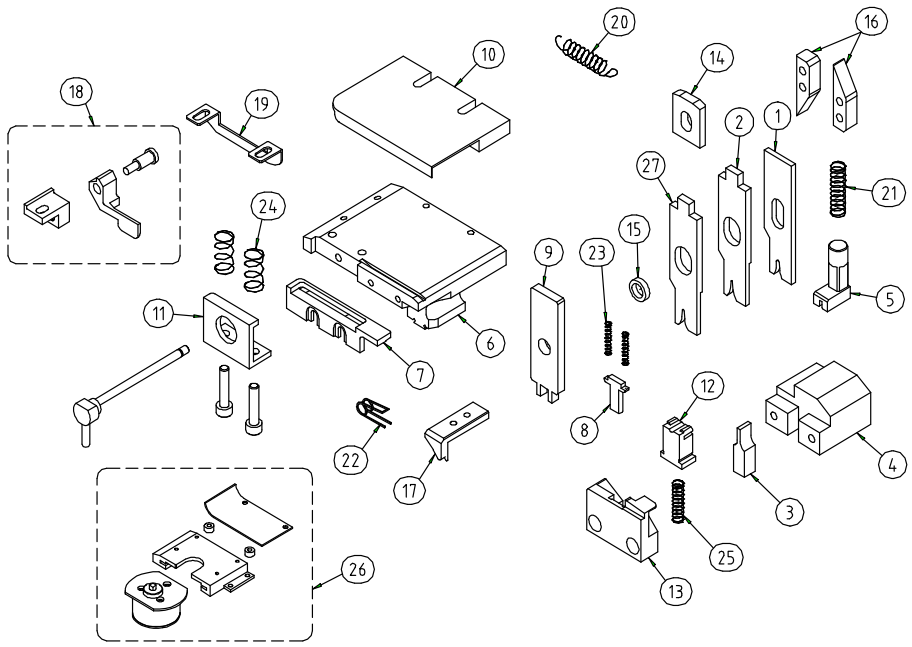
Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-0907	TERMINAL No. 端子品番	7112-5087

Common PN 共通品番	7FY9-9212	–	–	–
	–	–		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7112-5087XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7112-5087XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7112-5087XA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7112-5087XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7112-5087XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	002 ①	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7112-5087XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7112-5087XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	001	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7112-5087XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	001	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	001	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	025 ②	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
15	48A19019	019	BUSH ﾌﾞｯｼｭ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	003	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPROVED 承認	DESIGNED 設計
					APPRICATION POST 申請部署	
					PTC	
					DESIGNED DATE 設計日	
					2007/2/9	
②	2007/7/20	026→025	QX7	T,Suzuki		
①	2007/6/29	001→002	QX7	T,Suzuki	K,Hiraguchi	T,Suzuki
					2007/2/9	2007/2/9

ISSUED 発行

ISSUE
2013 / 09 / 16
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.