PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE



# APPLICATOR VALIDATION REPORT

**(Spec. YEL-RP-02-0004)**

| Applicator Serial Nº |
|---|
| 1704E380 |







***TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71125087 SEQUENCE Nº 2***






| Terminal Nº | Rubber Seal | Applicator Type | Purchasing Order Nº | Project / Model |
|---|---|---|---|---|
| **7112-5087-08** | * | **04 SIDE FEED** | **YSD-PO 25ENG/2017** | * |

| Anvil | | | Wire Crimper | | | Insulation Crimper | | |
|---|---|---|---|---|---|---|---|---|
| 7112-5087XA | | (N) | 7112-5087XW | | (N) | 7112-5087XI | | (N) |
| *CW (c)* | 1.32 | *CW (i)* 1.85 | *CW* | 1.30 | | *CW* | 1.85 | |

## 1 - VISUAL CHECK ITEMS

**O** - ok **X** - ng **NA** - not aplicable

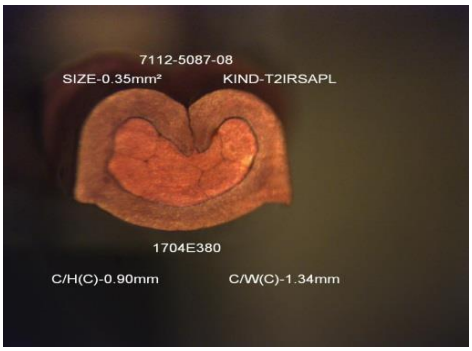
| | | |
|---|---|---|
|  | The two sides of the insulation grips are in the correct position. | **O** |
|  | Not found any Bell Mouth in the insulation area. | **O** |
|  | The lance height and shape are not deformed. | **O** |
|  | Not found any burr in the cutting carrier. | **O** |
|  | Not found any crack in the terminal. | **O** |
|  | The wire barrel is free from major burrs. | **O** |

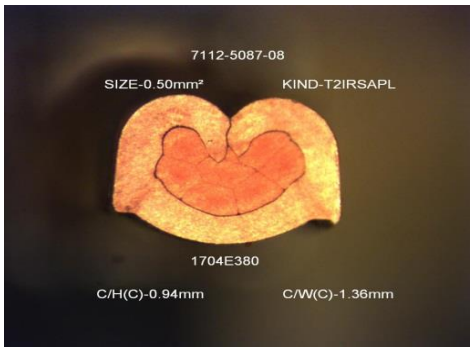
| | | |
|---|---|---|
|  | The Bell Mouth is within the spec.**(*)** | **O** |
|  | The dimension of the cutting carrier is within the spec.**(*)** | **O** |
|  | Bend up is within the criteria**(*)** | **O** |
|  | Bend down is within the criteria**(*)** | **O** |
|  | The terminal is not bent sideway, looking from the top**(*)** | **O** |
|  | The body of the terminal is not twisted**(*)** | **O** |

**(*)** - Specified on Crimping Std.

| **LOWER** WIRE KIND & SIZE | **UPPER** WIRE KIND & SIZE |
|---|---|

## 2 - MICRO CUT SAMPLES




## 3 - CRIMPING HEIGHT STABILITY

| | NOMINAL | AVERAGE | Cmk |
|---|---|---|---|
| mm | 0.9 | 0.90 | 4.17 |
| | **+/-0,05** | | |

| | NOMINAL | AVERAGE | Cmk |
|---|---|---|---|
| mm | 0.95 | 0.95 | 4.83 |
| | **+/-0,05** | | |

**REMARKS:**

Aplicable wire range 0.20mm²~0.60mm²
The wire size 0.22mm² is not recommended due to crimping microcut conditions
Wire 0.35mm² C/W(I)-1.77mm
Wire 0.50mm² C/W(I)-1.80mm

**EVALUATION DECISION**

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

| APPROVED (Section Chief) 3485 | CHECKED (Operator) 44 | PREPARED (Operator) nº 18388 |
|---|---|---|
| | | |
| Date: 2017-mai-09 | Date: 2017-mai-06 | Date: 2017-mai-05 |

YAZAKI
PORTO TECHNICAL CENTRE

# APPLICATOR VALIDATION REPORT

| Applicator Serial Nº |
|---|
| 1704E380 |

## LOWER WIRE KIND & SIZE

Wire kind: T2IRSAPL

Total wire size: 0,35 $mm^2$

| | | | |
|---|---|---|---|
| Nominal Cr. Height: | 0.9 | 1.5 | mm |
| +/- | 0.05 | 0.1 | mm |

| Sample number | Crimp height WIRE (mm) | Crimp height INSULATION (mm) |
|---|---|---|
| 1 | 0.899 | 1.497 |
| 2 | 0.898 | 1.501 |
| 3 | 0.899 | 1.505 |
| 4 | 0.897 | 1.501 |
| 5 | 0.900 | 1.508 |
| 6 | 0.899 | 1.509 |
| 7 | 0.902 | 1.503 |
| 8 | 0.900 | 1.510 |
| 9 | 0.899 | 1.501 |
| 10 | 0.897 | 1.506 |
| 11 | 0.898 | 1.506 |
| 12 | 0.899 | 1.501 |
| 13 | 0.902 | 1.508 |
| 14 | 0.899 | 1.506 |
| 15 | 0.898 | 1.498 |
| 16 | 0.897 | 1.500 |
| 17 | 0.898 | 1.507 |
| 18 | 0.895 | 1.504 |
| 19 | 0.899 | 1.508 |
| 20 | 0.899 | 1.510 |
| 21 | 0.898 | 1.509 |
| 22 | 0.895 | 1.508 |
| 23 | 0.900 | 1.510 |
| 24 | 0.898 | 1.500 |
| 25 | 0.897 | 1.508 |
| 26 | 0.896 | 1.511 |
| 27 | 0.897 | 1.508 |
| 28 | 0.896 | 1.508 |
| 29 | 0.895 | 1.514 |
| 30 | 0.893 | 1.514 |
| 31 | 0.899 | 1.507 |
| 32 | 0.899 | 1.507 |
| 33 | 0.891 | 1.503 |
| 34 | 0.891 | 1.504 |
| 35 | 0.892 | 1.507 |
| 36 | 0.892 | 1.507 |
| 37 | 0.897 | 1.501 |
| 38 | 0.901 | 1.508 |
| 39 | 0.900 | 1.509 |
| 40 | 0.893 | 1.502 |
| 41 | 0.896 | 1.503 |
| 42 | 0.899 | 1.502 |
| 43 | 0.890 | 1.509 |
| 44 | 0.896 | 1.499 |
| 45 | 0.893 | 1.500 |
| 46 | 0.896 | 1.500 |
| 47 | 0.897 | 1.497 |
| 48 | 0.888 | 1.499 |
| 49 | 0.886 | 1.501 |
| 50 | 0.887 | 1.504 |
| Average | 0.90 | 1.50 |
| Cmk | 4.17 | 7.35 |

## UPPER WIRE KIND & SIZE

Wire kind: T2IRSAPL

Total wire size: 0,5 $mm^2$

| | | | |
|---|---|---|---|
| Nominal Cr. Height: | 0.95 | 1.8 | mm |
| +/- | 0.05 | 0.1 | mm |

| Sample number | Crimp height WIRE (mm) | Crimp height INSULATION (mm) |
|---|---|---|
| 1 | 0.951 | 1.802 |
| 2 | 0.951 | 1.803 |
| 3 | 0.951 | 1.803 |
| 4 | 0.949 | 1.804 |
| 5 | 0.948 | 1.804 |
| 6 | 0.948 | 1.805 |
| 7 | 0.948 | 1.807 |
| 8 | 0.950 | 1.808 |
| 9 | 0.951 | 1.802 |
| 10 | 0.946 | 1.809 |
| 11 | 0.945 | 1.807 |
| 12 | 0.945 | 1.808 |
| 13 | 0.943 | 1.807 |
| 14 | 0.949 | 1.808 |
| 15 | 0.953 | 1.803 |
| 16 | 0.942 | 1.803 |
| 17 | 0.940 | 1.807 |
| 18 | 0.950 | 1.805 |
| 19 | 0.944 | 1.805 |
| 20 | 0.949 | 1.807 |
| 21 | 0.954 | 1.799 |
| 22 | 0.952 | 1.808 |
| 23 | 0.952 | 1.808 |
| 24 | 0.952 | 1.809 |
| 25 | 0.954 | 1.808 |
| 26 | 0.951 | 1.807 |
| 27 | 0.952 | 1.800 |
| 28 | 0.952 | 1.797 |
| 29 | 0.952 | 1.795 |
| 30 | 0.951 | 1.796 |
| 31 | 0.951 | 1.804 |
| 32 | 0.951 | 1.802 |
| 33 | 0.949 | 1.795 |
| 34 | 0.954 | 1.804 |
| 35 | 0.949 | 1.807 |
| 36 | 0.948 | 1.799 |
| 37 | 0.948 | 1.803 |
| 38 | 0.949 | 1.806 |
| 39 | 0.947 | 1.809 |
| 40 | 0.957 | 1.808 |
| 41 | 0.953 | 1.811 |
| 42 | 0.952 | 1.808 |
| 43 | 0.955 | 1.804 |
| 44 | 0.949 | 1.808 |
| 45 | 0.953 | 1.807 |
| 46 | 0.953 | 1.809 |
| 47 | 0.949 | 1.805 |
| 48 | 0.954 | 1.810 |
| 49 | 0.947 | 1.810 |
| 50 | 0.947 | 1.812 |
| Average | 0.95 | 1.81 |
| Cmk | 4.83 | 7.80 |

**Acceptance criteria: Cmk>= 2**

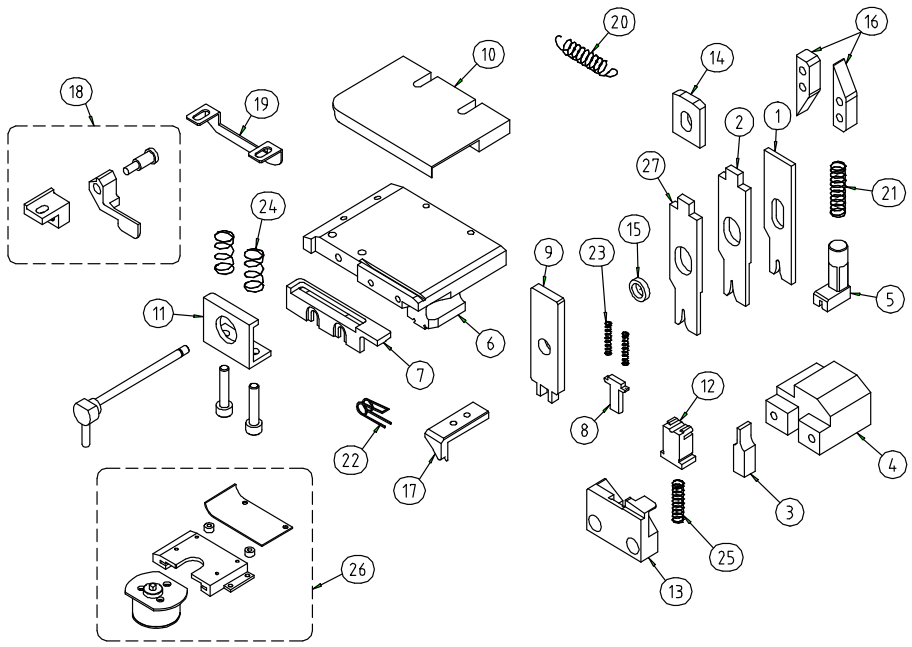
Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

**END**

# 04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

| PRODUCT No. 製品番号 | C0100-0907 | TERMINAL No. 端子品番 | 7112-5087 |
|---|---|---|---|

| Common PN 共通品番 | 7FY9-9212 | – | – | – |
|---|---|---|---|---|
| | – | – | | |




| No, | PARTS No, 部品番号 | DRW No, 図番 | PARTS NAME 部品名称 | No, | PARTS No, 部品番号 | DRW No, 図番 | PARTS NAME 部品名称 |
|---|---|---|---|---|---|---|---|
| 1 | 7112-5087XW | | WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ | 17 | 48A47013 | 001 | FEEDING CLAW 送り爪 |
| 2 | 7112-5087XI | | INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ | 18 | 48A19100 | 005 | WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ |
| 3 | 7112-5087XA | | ANVIL ｱﾝﾋﾞﾙ | 19 | 48A19047 | 001 | TERMINAL SCRAPER 端子掻き落とし |
| 4 | 7112-5087XJE | | ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ | 20 | 48A47031 | | RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ |
| 5 | 7112-5087XYY | | SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ | 21 | 48A47032 | 002 ① | SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ |
| 6 | 7112-5087XYB | | BASE ﾍﾞｰｽ | 22 | 48A19017 | 003 | FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ |
| 7 | 7112-5087XYH | | TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB | 23 | 48A19023 | 001 | WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ |
| 8 | 48A47016 | 001 | WIRE HOLDER 電線押さえ | 24 | 48A19074 | | TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ |
| 9 | 48A47017 | 002 | CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ | 25 | 48A19050 | | SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ |
| 10 | 48A47020 | A03 | TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA | 26 | 48A19999 | | TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ |
| 11 | 48A47022 | 001 | TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ | | 7112-5087XKP | | BRACKET ﾌﾞﾗｹｯﾄ |
| 12 | 48A47024 | 001 | SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ | 27 | | | ~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~ |
| 13 | 48A47025 | 001 | OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ | 〈OPTION ｵﾌﾟｼｮﾝ〉 | | | |
| 14 | 48A19007 | 025 ② | INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ | 13 | 48A47025 | 101 | OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ |
| 15 | 48A19019 | 019 | BUSH ﾌﾞｯｼｭ | 14 | 48A47042 | -001 | INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ) |
| 16 | 48A47014 | 003 | FEEDING CAM 送りｶﾑ | | | | |

| MARK 記号 | DATE 日付 | REVISION RECORD 改訂記録 | No. 番号 | CHECKED 点検 | APPROVED 承認 | DESIGNED 設計 |
|---|---|---|---|---|---|---|
| | | | | | APPRICATION POST 申請部署 | |
| | | | | | PTC | |
| | | | | | DESIGNED DATE 設計日 | |
| | | | | | 2007/2/9 | |
| ② | 2007/7/20 | 026→025 | QX7 | T,Suzuki | | |
| ① | 2007/6/29 | 001→002 | QX7 | T,Suzuki | K,Hiraguchi | T,Suzuki |
| | | | | | 2007/2/9 | 2007/2/9 |

ISSUED 発行

ISSUE
2013 / 09 / 16
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.