APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E384

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71161908 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-1908	**7157-3056-90**	**04 SIDE FEED**	**YSD_2018_001~008**	*






Anvil		
7116-1908DDXA		(A)
CW (c) 1,62	*CW (i)* 3,60	




Wire Crimper	
7116-1908DDXW	(A1)
CW 1,60	

Insulation Crimper	
7116-1908DDXI	(A2)
CW 3,60	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

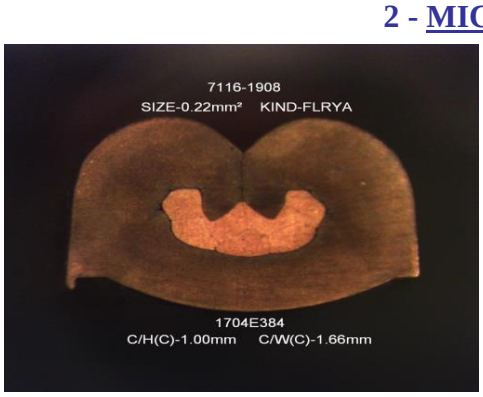
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

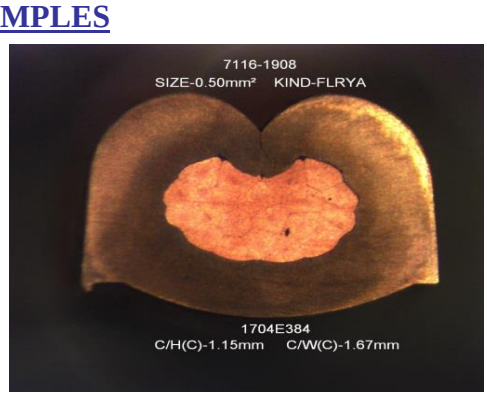
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1	1,00	3,24
	+/-0.03		



	NOMINAL	AVERAGE	Cmk
mm	1,15	1,15	3,11
	+/-0.05		

REMARKS:

Aplicable wire range 0.22mm²~0.50mm².
Size 0.22mm² C/W(I)-3.73mm
Size 0.50mm² C/W(I)-3.77mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
		
Date: 2018-abr-05	Date: 2018-abr-03	Date: 2018-abr-03

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E384

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,22 mm^2

Nominal Cr. Height:	1	3,7	mm
+/-	0,03	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,005	3,708
2	1,002	3,701
3	1,000	3,710
4	1,002	3,703
5	1,006	3,697
6	0,999	3,701
7	0,997	3,707
8	1,003	3,708
9	1,003	3,699
10	0,998	3,710
11	1,004	3,713
12	1,001	3,702
13	1,000	3,696
14	1,003	3,706
15	0,999	3,709
16	1,002	3,705
17	1,000	3,697
18	0,997	3,693
19	0,996	3,710
20	1,000	3,713
21	1,003	3,698
22	0,996	3,708
23	1,003	3,705
24	0,995	3,699
25	0,994	3,695
26	1,001	3,705
27	1,001	3,699
28	0,995	3,698
29	1,000	3,696
30	1,003	3,695
31	1,001	3,701
32	0,998	3,703
33	1,004	3,694
34	1,001	3,700
35	1,002	3,698
36	1,006	3,697
37	0,999	3,700
38	1,004	3,705
39	1,005	3,695
40	0,998	3,700
41	1,002	3,704
42	0,998	3,697
43	1,003	3,710
44	1,003	3,709
45	0,999	3,702
46	0,998	3,702
47	0,996	3,700
48	1,002	3,705
49	0,999	3,702
50	0,996	3,695
Average	1,00	3,70
Cmk	3,24	6,10

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,5 mm^2

Nominal Cr. Height:	1,15	4	mm
+/-	0,05	0,1	mm

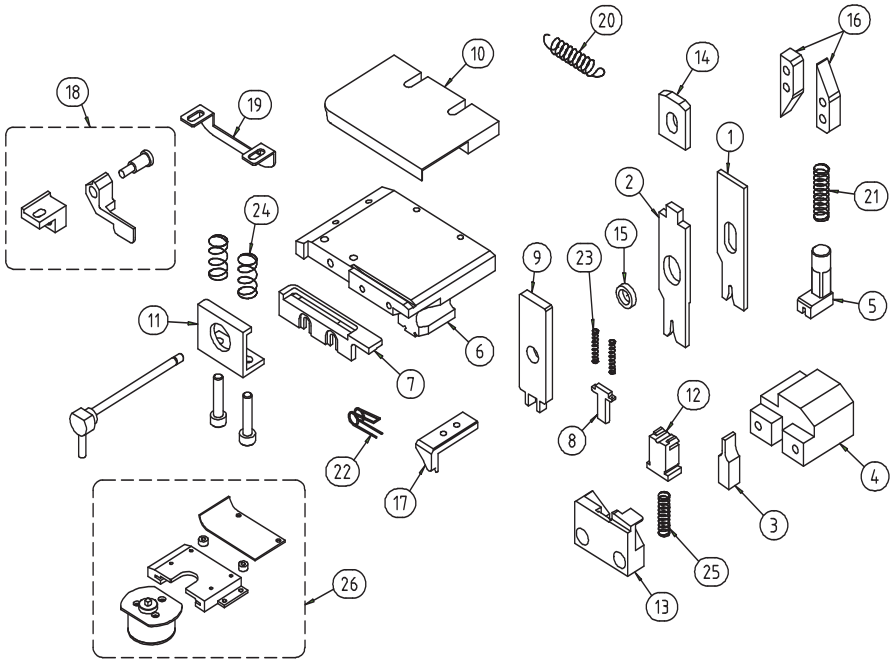
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,155	4,003
2	1,161	4,001
3	1,153	4,006
4	1,156	3,997
5	1,160	4,003
6	1,149	4,008
7	1,154	3,999
8	1,159	4,011
9	1,156	4,003
10	1,148	4,003
11	1,157	4,007
12	1,150	3,998
13	1,148	4,008
14	1,154	4,011
15	1,156	4,003
16	1,149	4,007
17	1,155	4,004
18	1,148	3,999
19	1,145	3,996
20	1,152	4,007
21	1,146	4,010
22	1,143	4,003
23	1,151	4,000
24	1,154	4,007
25	1,146	4,000
26	1,150	3,998
27	1,153	4,006
28	1,155	4,009
29	1,144	3,999
30	1,155	4,005
31	1,160	4,008
32	1,154	4,011
33	1,141	4,000
34	1,146	4,002
35	1,152	4,007
36	1,150	4,009
37	1,148	4,003
38	1,150	4,010
39	1,143	4,004
40	1,152	3,999
41	1,155	4,005
42	1,140	4,003
43	1,152	4,009
44	1,151	4,000
45	1,141	4,000
46	1,143	4,007
47	1,153	3,998
48	1,143	3,998
49	1,148	4,004
50	1,154	4,011
Average	1,15	4,00
Cmk	3,11	7,41

Acceptance criteria: Cmk>= 2.0

END

04 アプリケーター 消耗部品表 ／04 APPLICATOR CONSUMABLE PARTS LIST

製品番号 PRODUCT No.	C0100-1409	端子品番 TERMINAL No.	7116-1908DD



No.	部品番号 PARTS No.	図番 DRW. No.	部品名称 PARTS NAME
1	7116-1908XW ①		ﾜｲﾔｰｸﾘﾝﾊﾟｰ WIRE CRIMPER
2	7116-1908XID ①		ｲﾝｼｭｸﾘﾝﾊﾟｰ INSULATION CRIMPER
3	7116-1908XAD ①		ｱﾝﾋﾞﾙ ANVIL
4	7116-1908XJE ①		ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ ANVIL HOLDER
5	7116-1908XYY ①		ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ SUPPORTING STOPPER
6	7116-1908XYB ①		ﾍﾞｰｽ BASE
7	7116-1908XYH ①		ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB TERMINAL GUIDE PLATE B
8	48A47016	002	電線押さえ WIRE HOLDER
9	48A47017	003	切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ CUTTING PUNCH & WIRE HOLDER
10	48A47020	A04	ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA TERMINAL GUIDE PLATE A
11	48A47022	001	ﾀｰﾐﾅﾙ押さえ TERMINAL HOLDER
12	48A19049002PS	002②	ｼｬｰﾌﾟﾚｰﾄﾞ SHEARBLADE
13	48A47025003XP	003②	ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ OUTER SHEARBLADE
14	48A19007	011②③	ｲﾝｼｭ調整ｺﾏ INSULATION ADJUSTING PIECE
15	48A19019	029	ﾌﾞｯｼｭ BUSH

No.	部品番号 PARTS No.	図番 DRW. No.	部品名称 PARTS NAME
16	48A47014	001	送りｶﾑ FEEDING CAM
17	48A47013		送り爪 FEEDING CLAW
18	48A19100	005	電線ｽﾄｯﾊﾟｰ Assy WIRE STOPPER Assy
19	48A19047	001	端子掻き落とし TERMINAL SCRAPER
20	48A47031		戻しｽﾌﾟﾘﾝｸﾞ RETURN SPRING
21	48A47032	001	ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ SUPPORTING STOPPER SPRING
22	48A19017	003	送り爪ｽﾌﾟﾘﾝｸﾞ FEEDING CLAW SPRING
23	48A19023	001	電線押さえｽﾌﾟﾘﾝｸﾞ WIRE HOLDER SPRING
24	48A19074		ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ TERMINAL HOLDER SPRING
25	48A19050		ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ SHEARBLADE SPRING
26	48A19999		ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ TERMINAL OIL UNIT
27	7116-1908XKP①		ﾌﾞﾗｹｯﾄ BRACKET
<OPTION>オプション			
13	48A47025	-101	OUTER SHEARBLADE アウターシャープブレード
14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)

MARK	DATE	REVISION RECORD	No.	CHECKED
-	2013/5/9	オプション品の記載	C50	瀬川
③	2009/9/22	008→011	09J-015	C.Abe
②	2008/6/6	CHANGED No,	QX7	C.Sato
①	2007/2/9	DD削除	QX7	鈴木

APPRICATION POST 専用機	
DESIGNED DATE	
2006/9/4	
APPROVED	DESIGNED
松田	八木
2006/9/4	2006/9/4

ISSUE 2015/02/02 YAZAKI PARTS CO.LTD HAIBARA OFFICE

ISSUED MARK