PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E385

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71161079 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-1079-06	*	**04 SIDE FEED**	**YSD-PO 25ENG/2017**	*







Anvil		
7116-1079XA		(N)
CW (c) 2.80	*CW (i)* 4.00	






Wire Crimper	
7116-1079XW	(1)
CW 2.80	

Insulation Crimper	
7116-1079XI	(1)
CW 4.00	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

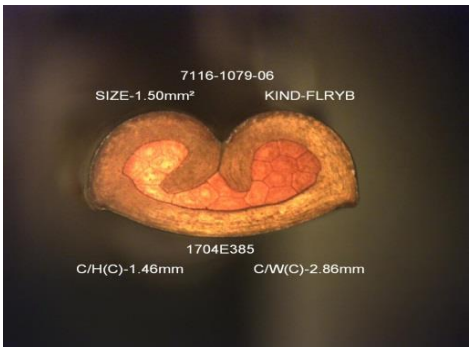
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

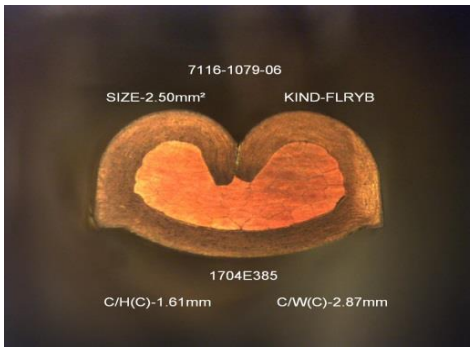
	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.45	1.45	4.36
	+/-0,05		

	NOMINAL	AVERAGE	Cmk
mm	1.6	1.60	4.57
	+/-0,05		

REMARKS:

Aplicable wire range 1.50mm²~2.50mm²
Wire 1.50mm² C/W(I)-3.85mm
Wire 2.50mm² C/W(I)-3.93mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
Date: 2017-mai-09	Date: 2017-mai-06	Date: 2017-mai-06

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E385

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 1,5 mm^2

Nominal Cr. Height:	1.45	2.6	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.451	2.602
2	1.452	2.603
3	1.451	2.601
4	1.452	2.600
5	1.453	2.607
6	1.456	2.606
7	1.455	2.597
8	1.451	2.606
9	1.453	2.601
10	1.451	2.610
11	1.448	2.602
12	1.449	2.606
13	1.449	2.606
14	1.448	2.606
15	1.449	2.608
16	1.451	2.603
17	1.449	2.602
18	1.449	2.600
19	1.449	2.604
20	1.450	2.602
21	1.450	2.604
22	1.449	2.607
23	1.446	2.602
24	1.450	2.600
25	1.450	2.600
26	1.448	2.608
27	1.448	2.605
28	1.446	2.599
29	1.450	2.602
30	1.450	2.606
31	1.445	2.605
32	1.447	2.598
33	1.446	2.602
34	1.446	2.599
35	1.449	2.598
36	1.447	2.597
37	1.445	2.595
38	1.446	2.592
39	1.455	2.604
40	1.452	2.593
41	1.453	2.592
42	1.453	2.592
43	1.444	2.597
44	1.443	2.600
45	1.439	2.605
46	1.438	2.597
47	1.444	2.598
48	1.444	2.595
49	1.448	2.597
50	1.444	2.599
Average	1.45	2.60
Cmk	4.36	7.32

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 2,5 mm^2

Nominal Cr. Height:	1.6	3	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.603	3.004
2	1.606	3.002
3	1.604	3.004
4	1.601	3.001
5	1.599	3.001
6	1.597	2.998
7	1.596	3.003
8	1.596	2.999
9	1.600	3.003
10	1.595	3.002
11	1.595	3.000
12	1.596	2.998
13	1.601	2.998
14	1.601	2.999
15	1.601	3.000
16	1.599	2.999
17	1.600	2.997
18	1.599	2.997
19	1.599	2.998
20	1.599	2.998
21	1.599	3.000
22	1.597	2.999
23	1.598	3.000
24	1.597	3.001
25	1.597	3.000
26	1.596	3.001
27	1.597	3.000
28	1.597	2.996
29	1.598	2.999
30	1.596	2.998
31	1.595	2.995
32	1.595	2.992
33	1.595	2.993
34	1.592	2.992
35	1.592	2.993
36	1.594	2.990
37	1.596	2.990
38	1.595	2.988
39	1.594	2.991
40	1.594	2.992
41	1.594	2.997
42	1.592	2.999
43	1.591	3.002
44	1.595	2.996
45	1.598	2.998
46	1.595	2.997
47	1.595	2.994
48	1.595	2.992
49	1.592	2.990
50	1.588	2.992
Average	1.60	3.00
Cmk	4.57	7.92

Acceptance criteria: Cmk>= 2

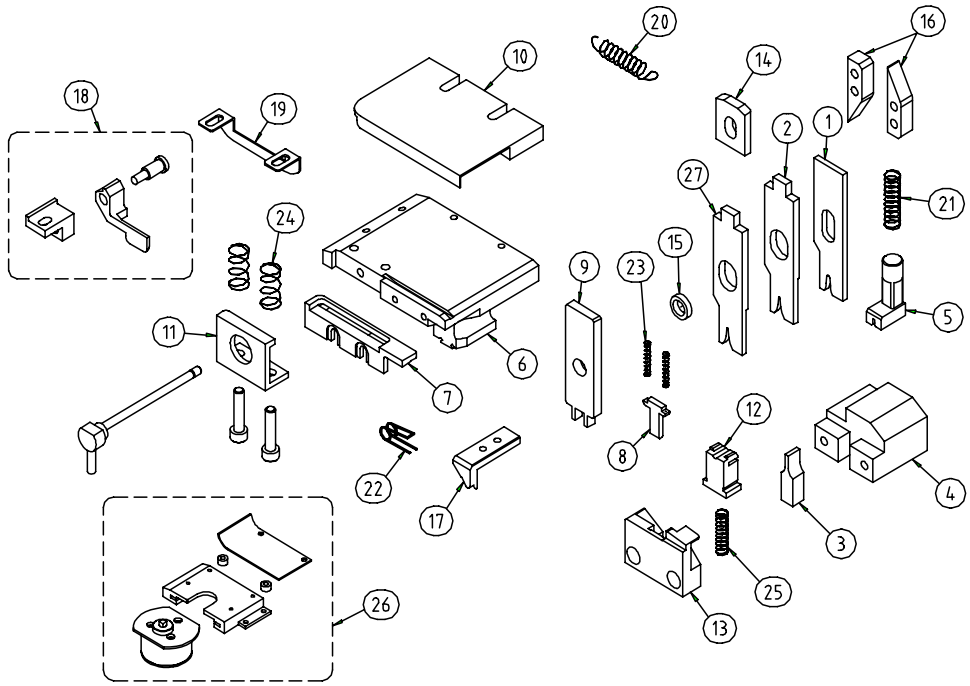
Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1243	TERMINAL No. 端子品番	7116-1079

Common PN 共通品番	970777	9116-7768	-	-
	-	-		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-1079XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-1079XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-1079XA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	003	TERMINAL SCRAPER 端子掻き落とし
4	7116-1079XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-1079XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-1079XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-1079XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	001	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A06	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-1079XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	001	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	<OPTION ｵﾌﾟｼｮﾝ>			
14	48A19007	020	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	013	BUSH ﾌﾞｯｼｭ	14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	005 ①	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	
					HIB	
					DESIGNED DATE 設計日	
					2007/5/31	
					APPROVED 承認	DESIGNED 設計
①	2007/7/5	001→005	QX7	T,Suzuki	K,Hiraguchi	T,Suzuki
					2007/5/31	2007/5/31

ISSUED '10.02.04 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED 発行